

DP-301P+



- Convenient Printer Sharing
- Centronics Port for Direct Printer Connection
- Web-based Set-up for Quick Configuration
- Compact & Portable



Express EtherNetwork[™] Fast Ethernet Print Server

D-Link, an industry leader in networking, introduces the **DP-301P+ Express EtherNetwork[™] Fast Ethernet Print Server**. The DP-301P+ is a compact print server that allows you to share your parallel printer on an Ethernet network. Now, everyone on your network can enjoy the benefits of sharing a single printer.

The DP-301P+ is a great alternative to software-based printer sharing. The DP-301P+ eliminates the need to have your printer connected to a host computer. With the DP-301P+, everyone on your network can be sure that their printing jobs go through at any time. Documents also print faster from the DP-301P+ than from software-based printer sharing solutions.

The DP-301P+ is designed to make installation simple. It has a built-in Centronics connector that connects directly to your printer without the

hassle of using a printer cable. Its compact size makes placement of the DP-301P+ easy—even in areas with limited space.

The DP-301P+ supports all the major networking protocols such as TCP/IP, NetBEUI, AppleTalk, and EtherTalk. It is compatible with computers running Windows, Macintosh, Linux, and all other TCP/IP compatible operating systems.

The DP-301P+ is easily configured using a Web-browser. With the user-friendly Web-based setup, you can quickly configure your DP-301P+ Print Server from any computer on the network. A PSAdmin configuration program is also included to configure your DP-301P+ for Windows-based systems.

Add the DP-301P+ to your home, school, or small office network for the convenience of a shared network printer.

Express EtherNetwork™

Fast Ethernet

Print Server

DP-301P+



SPECIFICATIONS

Standards

- IEEE 802.2
- IEEE 802.3
- IEEE 802.3u
- IEEE 1284

Port

- 10/100 Mbps Fast Ethernet
- Parallel Port with Centronics connector

Data Transfer Rate

10/100Mbps

Transport Protocols

- TCP/IP
- NetBEUI
- AppleTalk / EtherTalk

TCP/IP Protocols Supported

- BOOTP
- SNMP
- Telnet
- TFTP
- FTP
- LPD
- RARP
- DHCP

Management

SNMP

MIBs

MIB-II (RFC 1213)

Diagnostic LEDs

- Power
- Link/Activity
- LPT

Power Input

- External Power Supply
- DC 5V, 2.5A

Dimensions

- L = 3.54inches (90mm)
- W = 2.2inches (56mm)
- H = 1.02inches (26mm)

Weight

0.32 lbs (147g)

Operating Temperature

0°C to 50°C

Storage Temperature

-25°C to 55°C


Humidity

- 5% to 95%
- Non-condensing

Warranty

1 Year

The DP-301P+ is a Fast Ethernet Print Server that directly connects to the parallel port of your printer. The DP-301P+ allows everyone on the network to share a single printer.

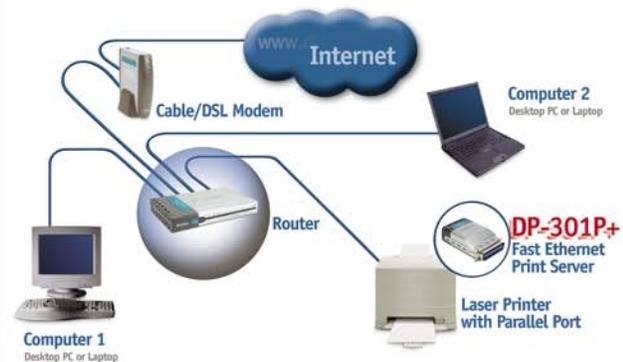

D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com
©Copyright D-Link Systems, Inc. 2004. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.
Other trademarks or registered trademarks are the property of their respective manufacturers or owners.
Price and specifications are subject to changes without notice. See inside package for warranty details.
* 24/7 Tech Support is available only in USA.

D-Link®

Building Networks for People