


Peplink Balance Two

Versatile Small Branch Office Router



Specifications

Balance Two	
WAN Interface	2x 10/100/1000M Ethernet Ports 1x USB Interface
LAN Interface	4x 10/100/1000M Ethernet Ports
Router Throughput	1Gbps
Recommended Users	25-150
Number of VPN/SpeedFusion Peers	2
PepVPN/SpeedFusion Throughput	150Mbps
Power Input	Device: 12V DC
Power Consumption	40W (max.)
Dimension (W x D x H)	7.4 x 6.9 x 1.7 inches 188 x 175 x 42 mm
Weight	2.2 pound / 1.2 kg
Operating Temperature	32° – 104°F / 0° – 40°C
Humidity	20% – 90% (non-condensing)
Certifications	CE, FCC, RoHS
Warranty	1-Year Limited Warranty

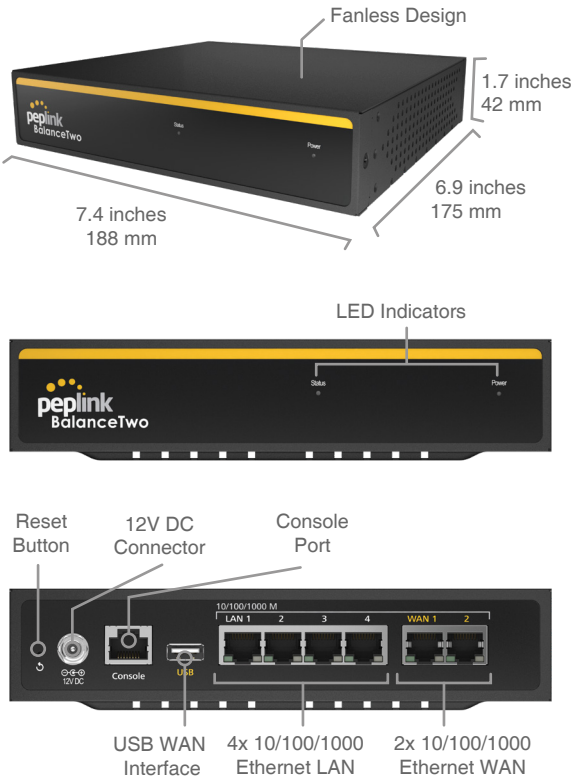

Ordering Information

Product Code	Description
--------------	-------------

BPL-TWO	Balance Two, Advanced Dual-WAN Router for Branch Networking
---------	-------------------------------------------------------------

Feature Add-On

Product Code	Description
--------------	-------------

BPL-TWO-LC-SF	SpeedFusion bonding license
---------------	-----------------------------

PVN-LC-05	Up to 5 PepVPN/ SpeedFusion Peers License Key for Selected Models
-----------	-------------------------------------------------------------------

PVN-LC-10	Up to 10 PepVPN/ SpeedFusion Peers License Key for Selected Models
-----------	--------------------------------------------------------------------

PVN-LC-20	Up to 20 PepVPN/ SpeedFusion Peers License Key for Selected Models
-----------	--------------------------------------------------------------------

Features

WAN
USB 4G/3G Modem Support
Support for PPPoE, Static IP, DHCP
Support for Dynamic DNS services
WAN Link Health Check
Intelligent Failover
Bandwidth Allowance Monitor

AP Controller
AP Controller Support
Wi-Fi Usage Statistics
Complete VPN Solution
PepVPN/SpeedFusion ^
Site-to-Site VPN
Bandwidth Aggregation ^
Hot Failover ^
256-bit AES Encryption
Pre-shared Key Authentication
Dynamic Routing
L2TP with IPsec VPN Server
PPTP VPN Server
RADIUS, LDAP Authentication
IPsec VPN (Network-to-Network)

Load Balancing
Intelligent Failover
Session Persistence
Per-Service Load Distribution
Multiple Algorithms

Networking
NAT and IP Forwarding
Static Routes
Port Forwarding
Many to One, One to One NAT
NAT Pool
SIP ALG, H.323 ALG
UPnP, NAT-PMP
WINS Server

Advanced QoS
User Groups
Bandwidth Reservation
Individual Bandwidth Limit
Application Prioritization
By User Groups
SIP, HTTPS, VPN QoS
Custom Application QoS
Web Blocking Blacklist

Captive Portal Support
Support for Wired and Wireless
LAN Clients
Support RADIUS Authentication
Time and Usage Quotas on Open Access Mode
Built-in Customizable Splash Page

Device Management
Web Administrative Interface
Command Line Interface
InControl Cloud Management
Email Notification
Active Client & Session Lists
Bandwidth Usage Statistics
Syslog Service
SNMP v1, v2c and v3

Package Content
Balance Two
12V Power Supply

Security
Stateful Firewall
DoS Prevention

^ SpeedFusion is available as an optional add-on



www.peplink.com
©Peplink International. All rights reserved.
Ref. no: balance-two-201912-v1

Peplink Balance Two

Versatile Small Branch Office Router




1Gbps Throughput, Under \$1000

With 2x GE WAN, 4x GE LAN, and a WLAN controller, the Balance Two provides ample connectivity for smaller enterprise branch offices.



Intelligent Traffic Steering

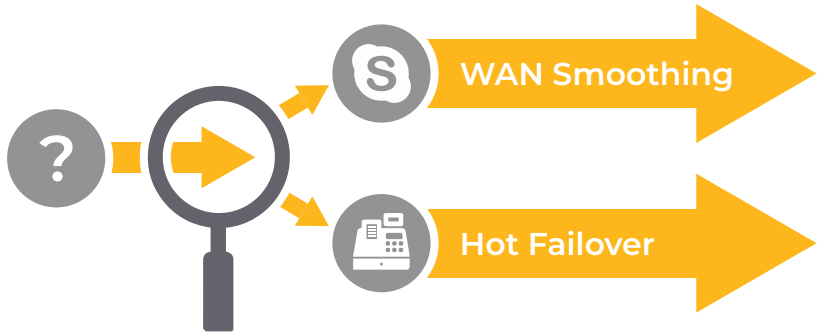

Traffic Steering automatically identifies packets by their application (e.g. Skype, PoS, ERP). Apply different SpeedFusion technologies to different kinds of traffic.

Fits Seamlessly in Any Office

The fanless design keeps the Balance Two whisper-quiet. Rear facing ports give the device a clean look, fitting any office environment.



Scalable, Centralized Management



Use InControl to make your deployment scalable. Centralize VLAN, outbound policy, firewall rules, configuration profiles and more in minutes.