

RG-ES103F-P

3-Port PoE-In Unmanaged Switch



Highlights

- 2 x 10/100BASE-T PoE+ Out Ports, 1 x 10/100BASE-T PoE+ In Port
- Plug and Play
- Cost-Effective Switch
- Up to 2 Concurrent Camera Connections
- PoE Input


Highlight Features



Increase Your Port Capacity and Coverage Distance

*The coverage distance reaches up to 350 m (1148.29 ft.) and requires long-distance transmission support on the uplink device.

*For 350 m (1148.29 ft.) transmission, it is recommended to connect only one downlink camera.

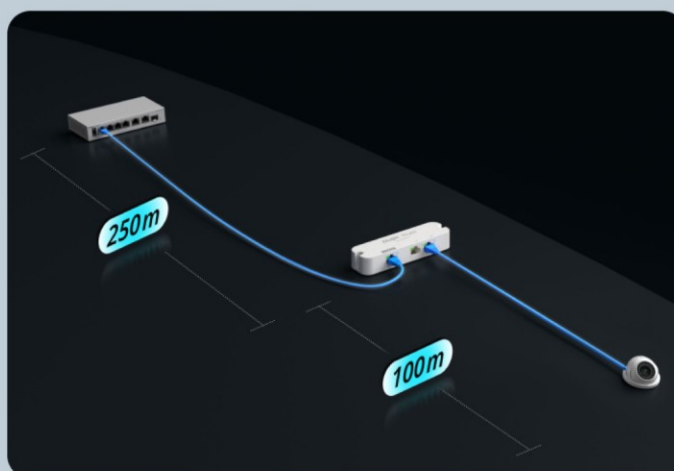

*Actual performance may vary depending on environment and cable quality.

Hardware Specifications

Model	RG-ES103F-P
Dimensions and Weight	
Casing	plastic
Product dimensions (W x D x H)	120mm x 34mm x 20.5mm
Weight	0.05 kg (0.11 lbs)
Shipping weight	0.114 kg (0.25 lbs)
Product Information	
Warranty	3 years
System Specifications	
Forwarding rate	0.45 Mpps
Switching capacity	0.6 Gbps(Gbit/s)
Power Supply and Consumption	
PoE Out standard	IEEE 802.3af/at (PoE/PoE+)
Number of PoE Out ports	2
Number of PoE/PoE+ Out ports	2
PoE budget	30 W
PoE power pins	1-2(+), 3-6(-)
Power input	PoE/HPoE Ethernet Power Supply: Compliant with 802.3af/at Ethernet Power Supply Standards
Maximum power consumption	32.5W (with full PoE load) 2.5W (without PoE load)
Power supply	PoE Ethernet Power Supply

Hardware Specifications

Model	RG-ES103F-P
Port Specifications	
Total number of RJ45 ports	3
Number of 10/100BASE-T ports	3
Environment and Reliability	
Cooling	Natural cooling
Mounting options	Wall/Desk
MTBF	200,000 hours
Operating temperature	0°C~40°C
Storage temperature	-40°C~70°C
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	-500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
ESD protection	Air discharge: 6 kV
	Contact discharge: 4 kV
Surge protection	Service port: ±4 kV for common mode
Certification and Regulatory Compliance	
EMC	EN 55032
	EN IEC 61000-3-2
	EN 61000-3-3
	EN 55035
	EN 300 386

Hardware Specifications

Model	RG-ES103F-P
Safety compliance	EN 62368-1
	IEC 62368-1
Certification	CE, CB

Package Contents

Model	RG-ES103F-P
Device	
Device	1
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 **R**edefine **y**our **e**asy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>