


# RG-RAP72-Wall

## Ruijie BE3600 Dual-Band Wall-Mount Wi-Fi 7 Access Point

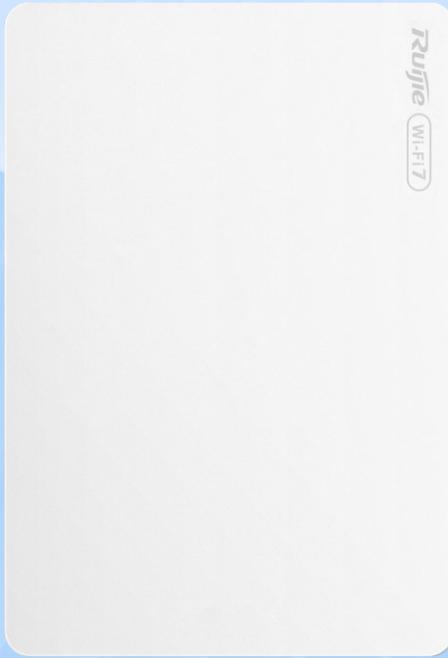

### Highlights

- Wi-Fi 7 revolution, providing data rates of up to 3600 Mbps
- 2.5 Gbps uplink port for ultra-high-speed indoor access
- PoE output for IP phones and other IoT devices
- Compact design with a thickness of 24 mm
- Anti-theft lock for device protection

## Product Overview

The RG-RAP72-Wall is a dual-band Wi-Fi 7 wireless access point (AP) launched by Ruijie Networks. Compliant with the IEEE 802.11be standard, the RG-RAP72-Wall is ideal for guest rooms in hotels and apartments, classrooms and dormitories in education sector, as well as office environments for small- and medium-sized enterprises.

The RG-RAP72-Wall can operate simultaneously in IEEE 802.11be, IEEE 802.11ax, IEEE 802.11ac Wave 2, IEEE 802.11ac Wave 1, and IEEE 802.11n modes. It supports both the 2.4 GHz and 5 GHz bands, delivering a data rate of up to 3.57 Gbps.

The RG-RAP72-Wall integrates essential functions such as wireless network security, a standalone portal, Reyee Mesh, QoS, and seamless roaming. It can work in conjunction with Ruijie Cloud to enable wireless client access control, operations and maintenance (O&M), and security access management.

The RG-RAP72-Wall is fit in junction boxes with mainstream dimensions, and features an Ethernet port that supports PoE output. Additionally, its sleek and attractive design ensures easy deployment.

## Product Pictures




## Product Highlights

- Wi-Fi 7 revolution, providing data rates of up to 3600 Mbps
- 2.5 Gbps uplink port for ultra-high-speed indoor access
- PoE output for IP phones and other IoT devices
- Compact design with a thickness of 24 mm
- Anti-theft lock for device protection

Experience the Revolution, Connect the Future

Wi-Fi 7 Dual-Band Wall-Mount Access Point

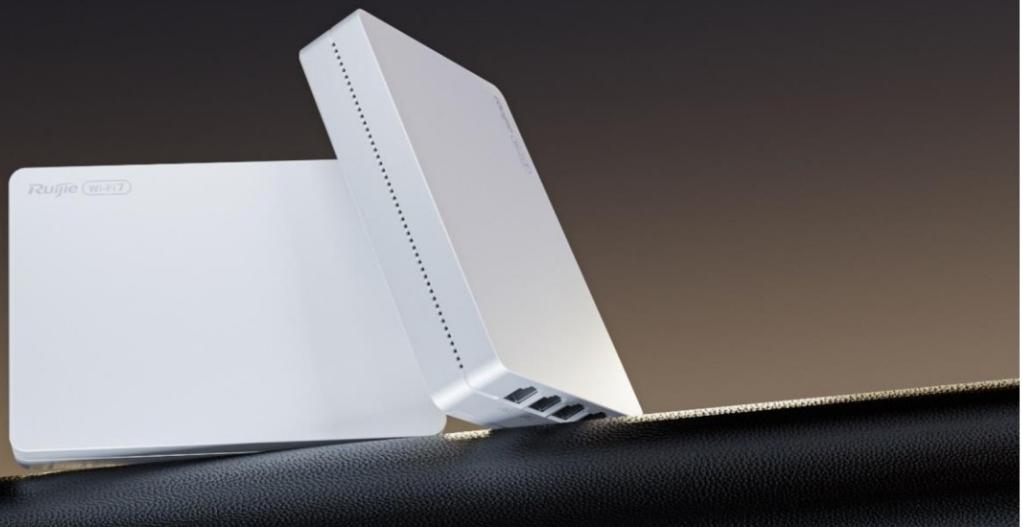



## Product Features

### Multi-Scenario Adaptability

The RG-RAP72-Wall is a dual-band wall-plate AP suitable for various applications, including hotels, high-end apartments, educational institutions, and business environments.

### High-Speed Access and Compatibility

The RG-RAP72-Wall can operate simultaneously in IEEE 802.11be, IEEE 802.11ax, IEEE 802.11ac Wave 2, IEEE 802.11ac Wave 1, and IEEE 802.11n modes. Supporting both 2.4 GHz and 5 GHz frequency bands, it offers a data rate of up to 3.57 Gbps, effectively eliminating any wireless performance bottlenecks.

### Compact Size, Excellent Heat Dissipation, and Versatile Installation Options

The RG-RAP72-Wall features a compact and lightweight design, with a thickness of just 24 mm

(0.94 in.), ensuring excellent heat dissipation performance. The RG-RAP72-Wall is fit in junction boxes with mainstream dimensions, ensuring adaptability to diverse installation environments. In addition to its sleek and attractive appearance, it provides a PoE output port that can power other devices, including IP phones and various smart devices.

### Standalone Portal

The RG-RAP72-Wall supports a standalone portal that enables Wi-Fi authentication through Ruijie Cloud. This standalone portal operates independently of a gateway, making network construction both easier and more cost-effective.

# Product Information

Model	RG-RAP72-Wall
Product Type	Wall AP

# Hardware Specifications

Model	RG-RAP72-Wall
<b>Wi-Fi Radio</b>	
6 GHz Wi-Fi	No
5 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 7 (IEEE 802.11be)
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 7 (IEEE 802.11be)
Operating band	IEEE 802.11b/g/n/ax/be, 2.400 GHz to 2.4835 GHz IEEE 802.11a/n/ac/ax/be, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz  Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands.
Radio design	Dual-radio 4 spatial streams • 2.4 GHz: 2 x 2, MU-MIMO • 5 GHz: 2 x 2, MU-MIMO
FEM	iFEM
6 GHz channel width	No
5 GHz channel width	Auto/20/40/80/160 MHz
2.4 GHz channel width	Auto/20/40 MHz
Maximum wireless data rate	3570 Mbps
6 GHz wireless data rate	No
5 GHz wireless data rate	2882 Mbps

# Hardware Specifications

Model	RG-RAP72-Wall
<b>2.4 GHz wireless data rate</b>	688 Mbps
	<p>Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country specific restrictions apply.</p> <p>European Union &amp; United Kingdom</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>United States:</p> <p>2400–2483.5 MHz, max output power ≤ 30 dBm &amp; EIRP ≤ 36 dBm</p> <p>5150–5250 MHz, max output power ≤ 30 dBm &amp; EIRP ≤ 36 dBm</p> <p>5250–5350 MHz, max output power &lt; 24 dBm &amp; EIRP ≤ 30 dBm</p> <p>5470–5725 MHz, max output power &lt; 24 dBm &amp; EIRP ≤ 30 dBm</p> <p>5725–5850 MHz, max output power ≤ 30 dBm &amp; EIRP ≤ 36 dBm</p> <p>Myanmar:</p> <p>2400–2483.5 MHz, EIRP ≤ 23 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Thailand:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia:</p> <p>2400–2483.5 MHz, EIRP ≤ 27 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5725–5825 MHz, EIRP ≤ 23 dBm</p> <p>Egypt:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam:</p> <p>2400–2483.5 MHz, EIRP ≤ 23 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5850 MHz, EIRP ≤ 30 dBm</p>
<b>Maximum transmit power</b>	No
<b>Maximum transmit power (5 GHz)</b>	<p>Combined power: 21.7 dBm (single-stream power: 17 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
<b>Maximum transmit power (2.4 GHz)</b>	<p>Combined power: 20 dBm (single-stream power: 17 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>

# Hardware Specifications

Model	RG-RAP72-Wall
<b>Coverage range</b>	55 m <sup>2</sup> (592.02 square ft.) Note: The data is obtained in an ideal environment without obstruction. The signal coverage radius depends on client performance and environmental interference.
<b>Modulation</b>	OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, and 64-QAM @ 48/54 Mbps DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, and 4096-QAM OFDMA
<b>Receive sensitivity</b>	11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps) 11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15) 11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9) 11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9) 11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9) 11ac: 160 MHz: -76 dBm (MCS0), -50 dBm (MCS9) 11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11) 11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11) 11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11) 11ax: 160 MHz: -76 dBm (MCS0), -49 dBm (MCS11) 11be: 20 MHz: -85 dBm (MCS0), -52 dBm (MCS13) 11be: 40 MHz: -82 dBm (MCS0), -49 dBm (MCS13) 11be: 80 MHz: -82 dBm (MCS0), -46 dBm (MCS13) 11be: 160 MHz: -79 dBm (MCS0), -44 dBm (MCS13)
<b>Antenna</b>	
<b>Antenna</b>	5 GHz: 1 built-in omnidirectional antenna Integrated 2.4 GHz and 5 GHz: 2 built-in omnidirectional antennas
<b>Antenna horizontal orientation</b>	No
<b>Antenna vertical orientation</b>	No
<b>Antenna gain (6 GHz)</b>	No
<b>Antenna gain (5 GHz)</b>	4.56 dBi
<b>Antenna gain (2.4 GHz)</b>	2.84 dBi

# Hardware Specifications

Model	RG-RAP72-Wall
<b>Dimensions and Weight</b>	
<b>Product dimensions (W x D x H)</b>	86 mm x 24 mm x 124 mm (3.39 in. x 0.94 in. x 4.88 in.) (excluding the mounting bracket)
<b>Color</b>	White
<b>Weight</b>	≤ 0.27 kg (0.60 lbs.) (without packaging materials)
<b>Shipping weight</b>	≤ 0.45 kg (0.99 lbs.)
<b>Port Specifications</b>	
<b>Number of 10/100/1000BASE-T ports</b>	4
<b>Number of 10/100/1000/2500BASE-T ports</b>	1
<b>Reset button</b>	1
<b>LEDs</b>	1 x system status LED
<b>Power Supply and Consumption</b>	
<b>Power supply</b>	PoE/PoE+
<b>Local power supply</b>	No
<b>Dimensions of the DC connector</b>	No
<b>PoE In standard</b>	<ul style="list-style-type: none"><li>IEEE 802.3af (PoE)</li></ul> <p>Note: The standard does not support PoE Out.</p> <ul style="list-style-type: none"><li>IEEE 802.3at (PoE+)</li></ul>
<b>Number of PoE Out ports</b>	1
<b>PoE budget</b>	10 W (when power source is IEEE 802.3at-compliant)
<b>Maximum power consumption</b>	15 W (excluding PoE output)
<b>Environment and Reliability</b>	
<b>Operating temperature</b>	0°C to +40°C (32°F to +104°F)
<b>Storage temperature</b>	-40°C to +70°C (-40°F to +158°F)
<b>Operating humidity</b>	5% RH to 95% RH (non-condensing)
<b>Storage humidity</b>	5%RH to 95% RH (non-condensing)

# Hardware Specifications

Model	RG-RAP72-Wall
Mounting options	Junction box
IP rating	IP41
Surge protection	Ethernet port: $\pm 2$ kV for common mode
MTBF	400,000 hours
<b>Certification and Regulatory Compliance</b>	
RoHS	Yes
Safety compliance	EN 62368-1
EMC	EN 55032 EN 55035 EN IEC 61000-3-2 EN 61000-3-3 EN 301489-1 EN 301489-3 EN 301489-17
RF	EN 300 328 EN 301 893 EN 300 440 Draft EN 303 687
Certification	CE, FCC, CB, ISED, cTUVus
<b>System Specifications</b>	
Flash memory	256 MB
RAM	512 MB DDR3

# Software Specifications

Model	RG-RAP72-Wall
<b>Basic Configurations</b>	
<b>AP mode</b>	Yes
<b>Routing mode</b>	Yes
<b>Internet access mode</b>	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
<b>Interface</b>	
<b>IPTV transparent transmission</b>	Yes
<b>Ethernet Interface</b>	
<b>PPPoE clients</b>	Yes
<b>Ethernet Switching</b>	
<b>IEEE 802.1Q VLAN</b>	Yes
<b>WLAN</b>	
<b>Maximum number of associated wireless clients</b>	64 (2.4 GHz) 511 (5 GHz) 511 (2.4 GHz and 5 GHz enabled)
<b>Recommended number of associated wireless clients</b>	<ul style="list-style-type: none"> <li>● Support for IEEE 802.11ax and 160 MHz: 16 (2.4 GHz) 94 (5 GHz) 110 (2.4 GHz and 5 GHz enabled)</li> <li>● Support for IEEE 802.11ax and 80 MHz: 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled)</li> <li>● Support for IEEE 802.11ac: 8 (2.4 GHz) 32 (5 GHz) 40 (2.4 GHz and 5 GHz enabled)</li> </ul>
<b>Maximum number of SSIDs</b>	8
<b>Radio-based client limiting</b>	Yes
<b>Layer 2 isolation</b>	Yes

# Software Specifications

Model	RG-RAP72-Wall
<b>OFDMA</b>	Yes
<b>WMM</b>	Yes
<b>DFS</b>	Yes
<b>MLO</b>	Yes
<b>4K-QAM</b>	Yes
<b>Different SSIDs for the same VLAN</b>	Yes
<b>Enabling/Disabling MLO</b>	Yes
<b>AP load balancing</b>	Yes
<b>Beamforming</b>	Yes
<b>802.11k/v roaming</b>	Yes
<b>Fast transition (802.11r)</b>	Yes
<b>Layer 2 roaming</b>	Yes
<b>Layer 3 roaming</b>	Yes
<b>AI roaming</b>	Yes
<b>PSK authentication</b>	Yes
<b>Static allowlist</b>	Yes
<b>Adjusting the transmit power for beacon and probe frames</b>	Yes
<b>Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)</b>	Yes
<b>OWE (Enhanced Open)</b>	
<b>WPA3-SAE</b>	Yes
<b>WPA2-PSK/WPA3-SAE</b>	
<b>Number of blocklists and allowlists based on MAC addresses (single SSID)</b>	256
<b>Number of global blocklists/allowlists</b>	256

# Software Specifications

Model	RG-RAP72-Wall
<b>Mesh management</b>	Yes
<b>AP Mesh</b>	Yes
<b>AP portal authentication</b>	Yes
<b>Maximum number of devices that can be managed</b>	300
<b>One-Click Network Optimization</b>	Yes
<b>Static blocklist</b>	Yes
<b>IP Service</b>	
<b>ARP binding</b>	Yes
<b>IPv4 ping</b>	Yes
<b>IPv6 ping</b>	Yes
<b>Traceroute</b>	Yes
<b>Static/Dynamic NAT</b>	Yes
<b>DHCP server</b>	Yes
<b>IPv6</b>	Yes
<b>Authentication</b>	
<b>802.1X authentication</b>	Yes
<b>Network Management and Monitoring</b>	
<b>Wireless repeater mode</b>	Yes
<b>Web login information</b>	Single-device login address: 10.44.77.254 Network-wide login address: 10.44.77.253 Default password: admin
<b>Network-wide configuration and management</b>	Yes
<b>Ruijie Reyee App management</b>	Yes
<b>eWeb management</b>	Yes
<b>Ruijie Cloud management</b>	Yes

## Software Specifications

Model	RG-RAP72-Wall
SNMP	Yes
<b>Configuration synchronization among the app, eWeb, and Ruijie Cloud</b>	Yes
<b>Displaying device information on Ruijie Cloud</b>	Yes

## Package Contents

Model	RG-RAP72-Wall
<b>Package Contents</b>	
<b>Package Contents</b>	<ul style="list-style-type: none"><li>1 x AP</li><li>1 x Mounting bracket</li><li>4 x Cross pan head screws (M4 x 25 mm)</li><li>1 x User Manual</li><li>1 x Warranty Card</li><li>1 x Key to security lock</li></ul>
<b>Accessories</b>	
<b>Power adapter</b>	No



**Ruijie Networks Co., Ltd.**

For more information, visit [www.ruijie.com](http://www.ruijie.com) or call 86-400-620-8818.