



Datasheet
Security Never Shuts Down

Outdoor Full-Color Bullet Network Camera

MODEL: EasyCam C320



2MP | H.265+

Human & Vehicle
Classification


Smart
Detection

LightPro
Night Vision

IP67
Weatherproofing


// LightPro Night Vision Technology

Intelligently switches between IR and full-color night vision by detecting people or vehicles, effectively minimizing light pollution and conserving energy.

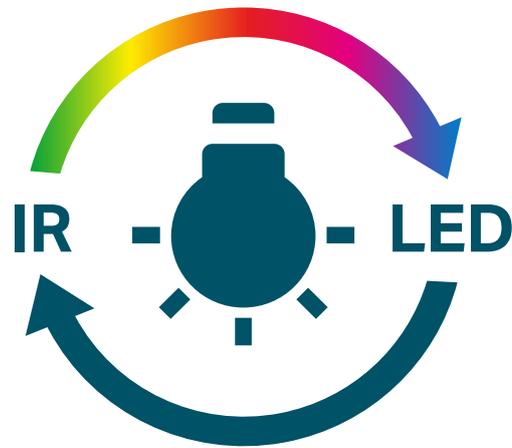


// Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.

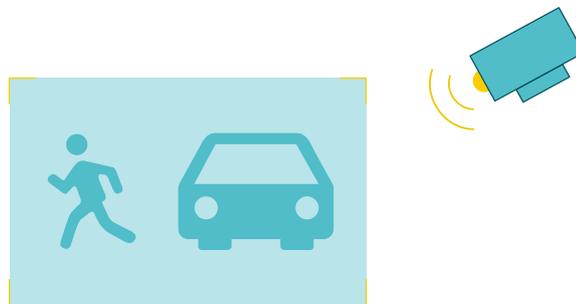

// Smart Detection



Intrusion
Detection



Line-Crossing
Detection



Region Entering
Detection




Region Exiting
Detection

// VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

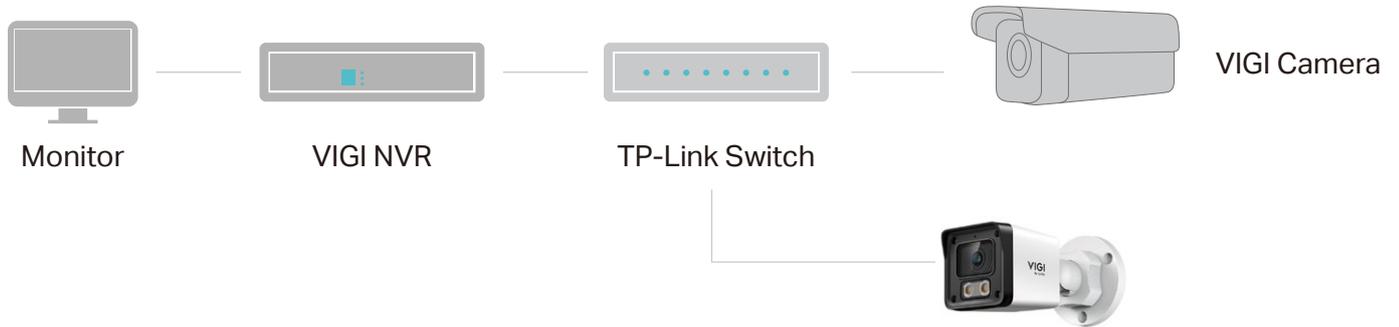

// Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole.*

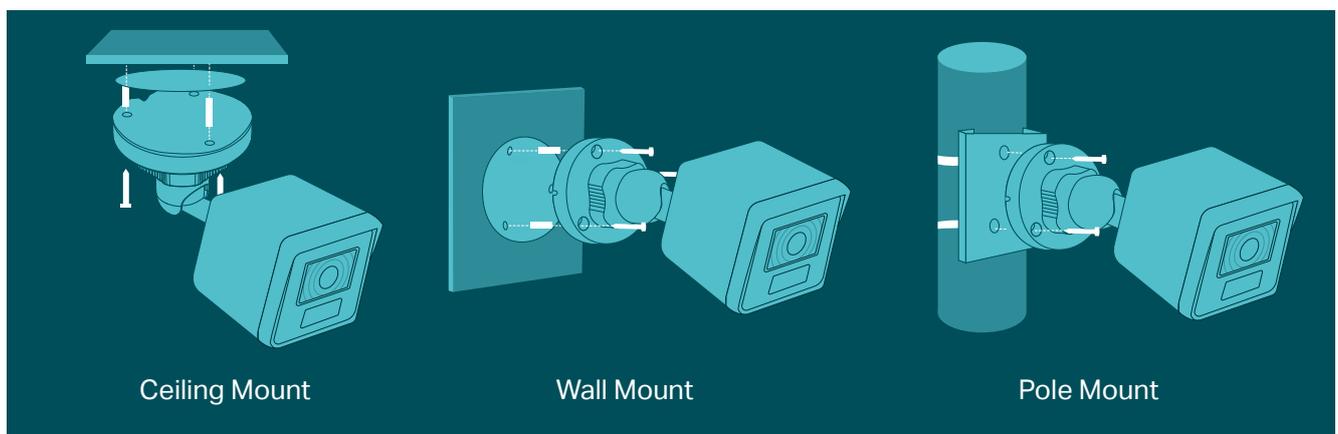

// Build Features



*The pole mounting kits are not included in the package.

// Specifications

| Camera | |
|---------------------|--|
| Product Model | EasyCam C320 |
| Image Sensor | 1/3" Progressive Scan CMOS |
| Shutter Speed | 1/3 to 1/10000 s |
| Slow Shutter | Yes |
| Min. Illumination | 0.01 Lux; 0 Lux with IR/White light |
| Day/Night Mechanism | IR Cut Filter |
| Day/Night Switch | Unified/ Scheduled/ Auto |
| Lens | |
| Type | Fixed Focal Lens |
| Focal Length | 2.8/4/6 mm |
| Aperture | F2.0 |
| FOV | <ul style="list-style-type: none">• 2.8 mm: Horizontal FOV: 98.8°, Vertical FOV: 53.5°, Diagonal FOV: 117°• 4 mm: Horizontal FOV: 75.2°, Vertical FOV: 40.8°, Diagonal FOV: 88.3°• 6 mm: Horizontal FOV: 59.8°, Vertical FOV: 27.6°, Diagonal FOV: 57.7° |
| Lens Mount | M12*P 0.5 |

| | |
|----------------------------------|--|
| DORI Distance | <ul style="list-style-type: none"> • 2.8 mm Detect: 154.2 ft (47 m) Observe: 62.3 ft (19 m) Recognize: 29.5 ft (9 m) Identify: 16.4 ft (5 m) • 4 mm Detect: 193.6 ft (59 m) Observe: 82 ft (25 m) Recognize: 39.4 ft (12 m) Identify: 19.7 ft (6 m) • 6 mm Detect: 292 ft (89 m) Observe: 121.4 ft (37 m) Recognize: 59.1 ft (18 m) Identify: 29.5 ft (9 m) |
| Angle Adjustment (Manual) | |
| Range | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° |
| Illuminator | |
| IR LED | <ul style="list-style-type: none"> • Quantity: 2 • IR Range: 98 ft (30 m) • White LED Range: 98 ft (30 m) • IR Wavelength: 850 nm |
| Illuminator On/Off Control | Auto/Scheduled/Always on/Always off |
| Video | |
| Max. Resolution | 1920x1080 |
| Main Stream | <ul style="list-style-type: none"> • Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps • Resolution: 1920x1080, 1280x960, 1280x720 <p>Note: If the image rotation is set to 90°, the frame rate only supports up to 20fps.</p> |


| | |
|-------------------------|--|
| Sub-Stream | <ul style="list-style-type: none"> • Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps • Resolution: 848x480, 704x576, 640x480, 640x360, 352x288, 320x240 <p>Note: If the image rotation is set to 90°, the frame rate only supports up to 20fps.</p> |
| Bit Rate Control | CBR, VBR |
| Video Compression | <ul style="list-style-type: none"> • Main Stream: H.265+/H.265/H.264+/H.264 • Sub-Stream: H.265/H.264 |
| H.264 Type | High Profile |
| H.264+ | Main Stream Supported |
| H.265 Type | Main Profile |
| H.265+ | Main Stream Supported |
| Video Bit Rate | <ul style="list-style-type: none"> • Main Stream: 256 Kbps to 4 Mbps • Sub-Stream: 64 Kbps to 512 Kbps |
| Image | |
| Image Settings | <ul style="list-style-type: none"> • Mirror • Brightness • Contrast • Saturation • Sharpness • Exposure • WDR • White Balance • Prevent Overexposure to Infrared Light • HLC Adjustable by Client Software |
| Image Enhancement | BLC/3D DNR/HLC/SmartIR |
| Wide Dynamic Range | DWDR |
| SNR | ≥ 52 dB |
| Image Parameters Switch | Yes |
| Privacy Mask | Up to 4 Masks |
| ROI | 1 Region |

| | |
|-----------------------------------|--|
| OSD Setting | Yes |
| Audio | |
| Audio Communication | N/A |
| Audio Input | Yes (Built-in Microphone) |
| Audio Output | N/A |
| Audio Compression | Yes |
| Audio Sampling Rate | 8KHz |
| Environment Noise Filtering | Yes |
| Audio Bit Rate | 64 Kbps (G.711 alaw) |
| Network | |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS, IPv4 |
| ONVIF | Yes |
| API | ONVIF Profile S/T |
| Simultaneous Live View | 3 Main Streams & 3 Sub-Streams |
| Client | VIGI App, Web UI, VIGI VMS, VIGI Cloud VMS, VIGI Config Tool |
| Web Browser | <ul style="list-style-type: none"> • Google Chrome® 57 and above • Firefox® 52 and above • Safari® 11 and above • Microsoft® Edge 91 and above |
| Cloud | Yes |
| Security | Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication |
| Alarm and Event Management | |
| Smart Event | <ul style="list-style-type: none"> • Intrusion Detection • Line-Crossing Detection • Region Entering Detection • Region Exiting Detection • People Detection • Vehicle Detection |

| | |
|-------------------------------|---|
| Basic Event | <ul style="list-style-type: none"> • Motion Detection (Enhanced with Human & Vehicle Classification for more accurate alerts) • Video Tampering Detection • Exception (Illegal Login) |
| Alarm Linkage | <ul style="list-style-type: none"> • Sending Email • Send to Alarm Server • Upload to FTP • Message Push |
| Deep Learning Function | |
| People & Vehicle Analytics | N/A |
| Interface | |
| Network Interface | 1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE |
| On-board Storage | N/A |
| Built-in Speaker | N/A |
| Built-in Microphone | Yes; Records Anything Going on within a 15 ft (4.6 m) Radius of the Camera |
| Audio | N/A |
| Alarm | N/A |
| Reset Button | N/A |
| Power | PoE Power Port |
| General | |
| Operating Temperature | -30 °C to 60 °C |
| Storage Temperature | -40 °C to 60 °C |
| Operating Humidity | 95% or Less (Non-Condensing) |
| Storage Humidity | 95% or Less (Non-Condensing) |
| Package Contents | <ul style="list-style-type: none"> • VIGI Network Camera • Quick Start Guide • Waterproof Cable Attachments • Mounting Accessories |
| Power Supply | PoE: 802.3af, class 0, Max. 7.1 W |
| Protection | IP67 |

| | |
|--------------------|---------------------------------------|
| Material | Plastic |
| Net Weight | 0.13Kg |
| Product Dimensions | 5.6 × 2.9 × 2.9 in (141 × 74 × 74 mm) |
| Certifications | CE, NTRA, KC, BSMI, IC, ROHS |

Dimensions

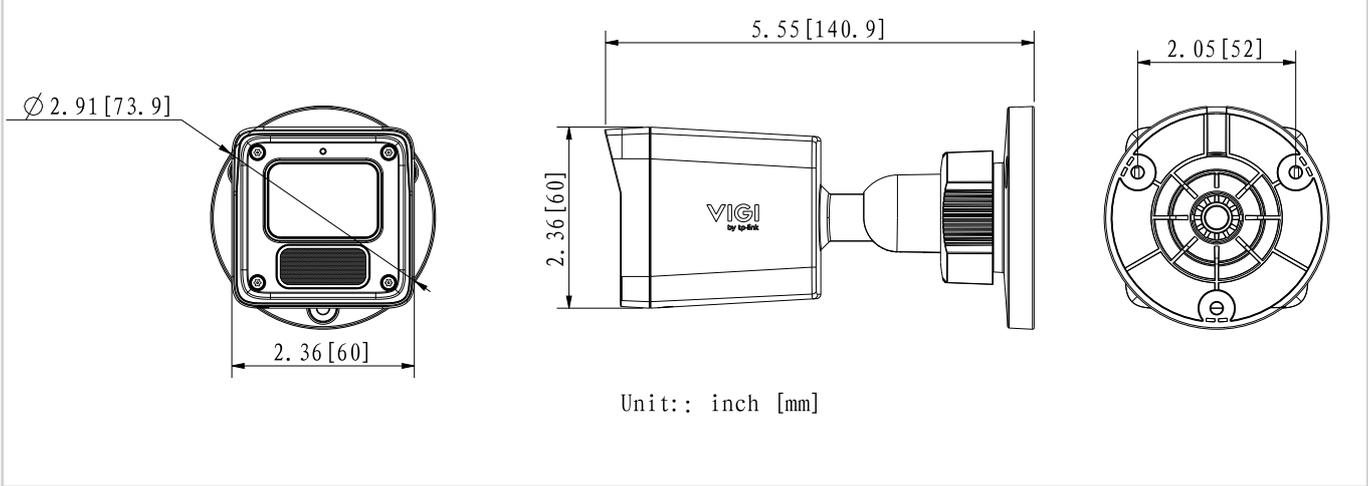

Specifications are subject to change without notice and can be found at www.vigi.com.

©2025 TP-Link