

# Ruijie Reyee RG-EW6000GX Wi-Fi Router

Implementation Cookbook



Document Version: V1.0

Date: June 17, 2025

Copyright © 2025 Ruijie Networks

#### Copyright

Copyright © 2025 Ruijie Networks

All rights are reserved in this document and this statement.

Without the prior written consent of Ruijie Networks, any organization or individual shall not reproduce, extract, back up, modify, or propagate the content of this document in any manner or in any form, or translate it into other languages or use some or all parts of the document for commercial purposes.



All other trademarks or registered trademarks mentioned in this document are owned by their respective owners.

#### **Disclaimer**

The products, services, or features you purchase are subject to commercial contracts and terms, and some or all of the products, services, or features described in this document may not be available for you to purchase or use. Except for the agreement in the contract, Ruijie Networks makes no explicit or implicit statements or warranties with respect to the content of this document.

The names, links, descriptions, screenshots, and any other information regarding third-party software mentioned in this document are provided for your reference only. Ruijie Networks does not explicitly or implicitly endorse or recommend the use of any third-party software and does not make any assurances or guarantees concerning the applicability, security, or legality of such software. You should choose and use third-party software based on your business requirements and obtain proper authorization. Ruijie Networks assumes no liability for any risks or damages arising from your use of third-party software.

The content of this document will be updated from time to time due to product version upgrades or other reasons, Ruijie Networks reserves the right to modify the content of the document without any notice or prompt.

This manual is designed merely as a user guide. Ruijie Networks has tried its best to ensure the accuracy and reliability of the content when compiling this manual, but it does not guarantee that the content of the manual is completely free of errors or omissions, and all the information in this manual does not constitute any explicit or implicit warranties.

#### **Preface**

#### **Intended Audience**

This document is intended for:

- Network engineers
- Technical support and servicing engineers
- Network administrators

#### **Technical Support**

• Ruijie Reyee website: <a href="https://reyee.ruijie.com">https://reyee.ruijie.com</a>

• Online support center: <a href="https://reyee.ruijie.com/en-global/support">https://reyee.ruijie.com/en-global/support</a>

• Case portal: <a href="https://www.ruijie.com/support/caseportal">https://www.ruijie.com/support/caseportal</a>

Community: <a href="https://community.ruijienetworks.com">https://community.ruijienetworks.com</a>

Email support: <a href="mailto:service\_rj@ruijie.com">service\_rj@ruijie.com</a>

Live chat: <a href="https://revee.ruijie.com/en-global/rita">https://revee.ruijie.com/en-global/rita</a>

#### Conventions

#### 1. GUI Symbols

Interface symbol	Description	Example
Boldface	Button names     Window names, tab name, field name and menu items     Link	<ol> <li>Click OK.</li> <li>Select Config Wizard.</li> <li>Click the Download File link.</li> </ol>
>	Multi-level menus items	Select System > Time.

#### 2. Signs

This document also uses signs to indicate some important points during the operation. The meanings of these signs are as follows:



#### Warning

An alert that calls attention to important rules and information that if not understood or followed can result in data loss or equipment damage.



#### Note

An alert that calls attention to essential information that if not understood or followed can result in function failure or performance degradation.

#### Instruction

An alert that contains additional or supplementary information that if not understood or followed will not lead to serious consequences.

#### **/**

#### **Specification**

An alert that contains a description of product or version support.

#### 3. Instruction

This manual is used to guide users to understand the product, install the product, and complete the configuration.

- The example of the port type may be different from the actual situation. Please proceed with configuration according to the port type supported by the product.
- The example of display information may contain the content of other product series (such as model and description). Please refer to the actual display information.
- The routers and router product icons involved in this manual represent common routers and layer-3 switches running routing protocols.



## Ruijie Reyee RG-EW6000GX Wi-Fi Router Implementation Cookbook

This cookbook consists of multiple independent volumes, introducing the installation, deployment, and webbased configuration of the RG-EW6000GX, including:

01- Installation Guide

02- ReyeeOS 1.316 Configuration Guide

## **Contents**

1 Product Overview	1
1.1 RG-EW6000GX	1
1.2 Package Contents	1
1.3 Product Appearance	2
1.3.1 Product Appearance	2
1.3.2 Ports and LEDs	3
1.4 Specifications	4
1.5 Power Consumption	7
1.6 Cooling	7
2 Preparing for Installation	8
2.1 Safety Guidelines	8
2.2 Site Requirements	8
2.2.1 Temperature and Humidity	8
2.2.2 Cleanliness	9
2.2.3 ESD Prevention	9
2.2.4 Preventing Electromagnetic Interference	9
2.2.5 Installation Site	10
2.3 Tools	10
3 Installing the Router	11
3.1 Before You Begin	11
3.2 Safety Precautions During Installation	11
3.3 Installation Guide	11

3.4 Bundling Cables	12
3.5 Verifying Installation	12
4 Commissioning	13
4.1 Setting Up the Configuration Environment	13
4.2 Powering-on	13
4.2.1 Checklist Before Power-on	13
4.2.2 Checklist After Power-on	13
4.3 Rectifying Power Supply Failures	13
5 Monitoring and Maintenance	14
5.1 Monitoring	14
5.2 Hardware Maintenance	14
6 Common Troubleshooting	15
6.1 Troubleshooting Flowchart	15
6.2 Common Faults	15
7 Appendix	17
7.1 Appendix A Connectors and Media	17

## **Product Overview**

#### 1.1 RG-EW6000GX

The RG-EW6000GX is a gigabit wireless router designed for small- or medium-sized indoor scenarios covering apartments, villas, residential buildings, and business offices. Compliant with IEEE 802.11a/b/g/n/ac/ax, this router operates simultaneously on the 2.4 GHz and 5 GHz frequency bands. It supports 4x4 MU-MIMO, delivering access rates of up to 1,147 Mbps on the 2.4 GHz frequency band and 4,804 Mbps on the 5 GHz frequency band. The router delivers a combined data rate of up to 5,951 Mbps. In addition to one 2.5 Gbps uplink port (WAN), this router provides four gigabit Ethernet downlink ports (LAN) for connecting to wired terminals. This makes the router an ideal choice for meeting indoor wired and wireless deployment requirements.

#### 1.2 Package Contents

Table 1-1 **Package Contents** 

No.	Item	Quantity
1	RG-EW6000GX	1
2	Power adapter (12 V DC/2.5 A)	1
3	Ethernet cable	1
4	Quick Start Guide	1
5	Warranty Card	1

#### Note

The package contents are subject to the purchase contract, and actual delivery may vary. Please check the items carefully against the package contents or purchase contract. If you have any questions, please contact the distributor.

## 1.3 Product Appearance

## 1.3.1 Product Appearance



## 1.3.2 Ports and LEDs



No.	Component	Description	
1	2.5GE WAN/LAN Port	10/100/1000/2500BASE-T port, which is connected to a modem or fiber-to-the-home (FTTH) Ethernet cable and can be switched to a LAN port.	
2	GE LAN/WAN Port	10/100/1000BASE-T port, which is connected to an Ethernet cable and can be switched to a WAN port.	

No.	Component	Description		
3	GE LAN Port	10/100/1000BASE-T port, which is connected to a wired terminal.		
4	Gaming Port	Default LAN po	rt and gaming port	
5	Reset	Press and hold settings.	the button for more than 3 seconds to restore factory	
6	Power	Connected to a	power adapter.	
7	Reyee Mesh Button	<ul> <li>Press and hold the button for less than 2 seconds. Reyee Mesh pairing is performed with an RG-EW series router.</li> <li>Press and hold for more than 3 seconds to enable or disable Game Turbo.</li> </ul>		
	Reyee Mesh LED	Solid on	Reyee Mesh succeeded.	
8		Off	Reyee Mesh is not performed or disconnected.	
		Blinking	Reyee Mesh is pairing.	
	System Status LED	Solid green	The router is operating normally with Game Turbo disabled.	
		Blinking green	The router is starting, resetting, or upgrading.	
9		Solid red	The router is not connected to the Internet.	
		Solid purple	The router is operating normally with Game Turbo enabled.	
		Solid orange	The mesh Wi-Fi signal is weak (as a secondary router).	
10	Nameplate	The nameplate is located at the bottom of the router.		

## 1.4 Specifications

Table 1-2 Technical Specifications of an RG-EW6000GX Router

Radio Design	2.4G & 5G dual-radio and four streams	
Transmission Protocol	802.11a/n/ac/ax 802.11b/g/n/ax	
Operating Frequency Band	802.11b/g/n/ax: 2.4 GHz to 2.4835 GHz 802.11a/n/ac/ax: 5.1 GHz (5.150 GHz to 5.350 GHz), 5.4 GHz (5.470 GHz to 5.725 GHz), 5.8 GHz (5.725 GHz to 5.850 GHz)	
Antenna Type	External flat omnidirectional antenna 2.4 GHz: 5.85 dBi	

	5 GHz: 5.66 dBi	
Number of Spatial	2.4 GHz: 4x4 MU-MIMO	
Streams	5 GHz: 4x4 MU-MIMO	
Transmission Rate	Up to 1,147 Mbps access rate on the 2.4 GHz frequency band	
	Up to 4,804 Mbps access rate on the 5 GHz frequency band	
	Combined access rate: 5,951 Mbps	
Modulation	OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, and 64QAM@48/54 Mbps	
	DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps	
	MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM, and 1024QAM	
	OFDMA	
	2.4 GHz: 20 MHz	
	802.11b: -91 dBm (1 Mbps)	
	802.11g: -87 dBm (6 Mbps), -72 dBm (54 Mbps)	
	802.11n: -88 dBm (MCS0), -70 dBm (MCS7)	
Receive Sensitivity	802.11ax: -88 dBm (MCS0), -65 dBm (MCS8), -58 dBm (MCS11)	
Receive Selisitivity	5 GHz: 20 MHz	
	802.11n: -88 dBm (MCS0), -70 dBm (MCS7)	
	802.11a: -89 dBm (6 Mbps), -72 dBm (54 Mbps)	
	802.11ac: -88 dBm (MCS0), -65 dBm (MCS8)	
	802.11ax: -88 dBm (MCS0), -65 dBm (MCS8), -58 dBm (MCS11)	
Maximum Transmit Power	2400 MHz to 2483.5 MHz ≤ 20 dBm (EIRP);	
	5150 MHz to 5350 MHz ≤ 23 dBm (EIRP);	
	5470 MHz to 5725 MHz ≤ 30 dBm (EIRP);	
	5725 MHz to 5850 MHz ≤ 30 dBm (EIRP);	
	Note: Country specific restrictions apply	
	European Union & United Kingdom:	
	2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm	
	5150 MHz to 5350 MHz, EIRP ≤ 23 dBm	
	5470 MHz to 5725 MHz, EIRP ≤ 30 dBm	
	Myanmar:	
	2400 MHz to 2483.5 MHz, EIRP ≤ 23 dBm	
	5725 MHz to 5825 MHz, EIRP ≤ 30 dBm	
	Thailand:	
	2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm	

\$470 MHz to 5725 MHz, EIRP ≤ 30 dBm     \$725 MHz to 5825 MHz, EIRP ≤ 30 dBm     Indonesia:     2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm     5150 MHz to 5350 MHz, EIRP ≤ 23 dBm     5725 MHz to 5825 MHz, EIRP ≤ 23 dBm     5725 MHz to 5825 MHz, EIRP ≤ 23 dBm     Egypt:     2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 23 dBm     Egypt:     2400 MHz to 5350 MHz, EIRP ≤ 23 dBm     Adjustable Power     Granularity   0.5 dBm     Dimensions (W x D x H)   200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)     Weight   0.95 kg (2.09 lbs) (without packaging materials)     1.68 kg (3.70 lbs) (with packaging materials)     1.68 kg (3.70 lbs) (with packaging materials)     1 x 10/100/1000/2500BASE-T uplink port (WAN)     4 x 10/100/1000BASE-T downlink ports (LAN)     1 x Reyee Mesh LED     1 x System Status LED     Power Consumption   < 24 W     Environment   Operating temperature: −10°C to +40°C (14°F to 104°F)     Storage temperature: −40°C to +70°C (−40°F to +158°F)     Operating humidity: 20% RH to 80% RH (non-condensing)     Storage humidity: 5% RH to 95% RH (non-condensing)     Storage humidity: 5% RH to 95% RH (non-condensing)     Certification   CE, CB     MTBF   ≥ 30.000 hours		5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
Indonesia:   2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm     5150 MHz to 5350 MHz, EIRP ≤ 23 dBm     5725 MHz to 5825 MHz, EIRP ≤ 23 dBm     Egypt:   2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 20 dBm     5150 MHz to 5350 MHz, EIRP ≤ 23 dBm     0.5 dBm		5470 MHz to 5725 MHz, EIRP ≤ 30 dBm
2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm		5725 MHz to 5825 MHz, EIRP ≤ 30 dBm
5150 MHz to 5350 MHz, EIRP ≤ 23 dBm   5725 MHz to 5825 MHz, EIRP ≤ 23 dBm   Egypt: 2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm   5150 MHz to 5350 MHz, EIRP ≤ 20 dBm   5150 MHz to 5350 MHz, EIRP ≤ 23 dBm		Indonesia:
F725 MHz to 5825 MHz, EIRP ≤ 23 dBm           Egypt:           2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm           5150 MHz to 5350 MHz, EIRP ≤ 23 dBm           Adjustable Power Granularity         0.5 dBm           Dimensions (W x D x H)         200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)           Weight         0.95 kg (2.09 lbs) (without packaging materials)           1.68 kg (3.70 lbs) (with packaging materials)           1 x 10/100/1000/2500BASE-T uplink port (WAN)           4 x 10/100/1000BASE-T downlink ports (LAN)           1 x Reyee Mesh LED           1 x System Status LED           Power Supply         DC 12 V 2.5 A           Power Consumption         < 24 W           Environment         Operating temperature: -10°C to +40°C (14°F to 104°F)           Storage temperature: -40°C to +70°C (-40°F to +158°F)           Operating humidity: 20% RH to 80% RH (non-condensing)           Storage humidity: 5% RH to 95% RH (non-condensing)           Mounting         Desk mount           Wall mount         CE, CB		2400 MHz to 2483.5 MHz, EIRP ≤ 27 dBm
Egypt:         2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm           5150 MHz to 5350 MHz, EIRP ≤ 23 dBm           Adjustable Power Granularity         0.5 dBm           Dimensions (W x D x H)         200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)           Weight         0.95 kg (2.09 lbs) (without packaging materials)           1.68 kg (3.70 lbs) (with packaging materials)           Service Port         1 x 10/100/1000/2500BASE-T uplink port (WAN)           4 x 10/100/1000BASE-T downlink ports (LAN)           Status LED         1 x Reyee Mesh LED           1 x System Status LED           Power Consumption         < 24 W           Environment         Operating temperature: -10°C to +40°C (14°F to 104°F)           Storage temperature: -40°C to +70°C (-40°F to +158°F)           Operating humidity: 20% RH to 80% RH (non-condensing)           Storage humidity: 5% RH to 95% RH (non-condensing)           Mounting         Desk mount           Wall mount         CE, CB		5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm 5150 MHz to 5350 MHz, EIRP ≤ 23 dBm   Adjustable Power Granularity  Dimensions (W x D x H)  200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: −10°C to +40°C (14°F to 104°F)  Storage temperature: −40°C to +70°C (−40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB		5725 MHz to 5825 MHz, EIRP ≤ 23 dBm
Adjustable Power Granularity         0.5 dBm           Dimensions (W x D x H)         200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)           Weight         0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)           Service Port         1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)           Status LED         1 x Reyee Mesh LED 1 x System Status LED           Power Supply         DC 12 V 2.5 A           Power Consumption         < 24 W           Environment         Operating temperature: -10°C to +40°C (14°F to 104°F)           Storage temperature: -40°C to +70°C (-40°F to +158°F)           Operating humidity: 20% RH to 80% RH (non-condensing)           Storage humidity: 5% RH to 95% RH (non-condensing)           Mounting         Desk mount Wall mount           Certification         CE, CB		Egypt:
Adjustable Power Granularity  Dimensions (W x D x H)  200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Mounting  Mounting  Certification  CE, CB		2400 MHz to 2483.5 MHz, EIRP ≤ 20 dBm
Dimensions (W x D x H)   200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)		5150 MHz to 5350 MHz, EIRP ≤ 23 dBm
Dimensions (W x D x H)  200 mm x 200 mm x 43.8 mm (7.87 in. x 7.87 in. x 1.72 in., antennas not included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Mounting  Mounting  Certification  CE, CB		0.5 dBm
included)  Weight  0.95 kg (2.09 lbs) (without packaging materials) 1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Mounting  Mounting  Certification  CE, CB	Granularity	
Weight       1.68 kg (3.70 lbs) (with packaging materials)         Service Port       1 x 10/100/1000/2500BASE-T uplink port (WAN)         4 x 10/100/1000BASE-T downlink ports (LAN)         1 x Reyee Mesh LED         1 x System Status LED         Power Supply       DC 12 V 2.5 A         Power Consumption       < 24 W         Environment       Operating temperature: -10°C to +40°C (14°F to 104°F)         Storage temperature: -40°C to +70°C (-40°F to +158°F)         Operating humidity: 20% RH to 80% RH (non-condensing)         Storage humidity: 5% RH to 95% RH (non-condensing)         Mounting       Desk mount         Wall mount       CE, CB	Dimensions (W x D x H)	·
1.68 kg (3.70 lbs) (with packaging materials)  1 x 10/100/1000/2500BASE-T uplink port (WAN) 4 x 10/100/1000BASE-T downlink ports (LAN)  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Certification  1 x Reyee Mesh LED 1 x System Status LED  DC 12 V 2.5 A  Power Consumption  2 24 W  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Maight	0.95 kg (2.09 lbs) (without packaging materials)
Service Port  4 x 10/100/1000BASE-T downlink ports (LAN)  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  Environment  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	weight	1.68 kg (3.70 lbs) (with packaging materials)
Status LED  1 x Reyee Mesh LED 1 x System Status LED  Power Supply  DC 12 V 2.5 A  Power Consumption  2 24 W  Certification  1 x Reyee Mesh LED 1 x System Status LED  DC 12 V 2.5 A  Power Consumption  2 24 W  Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Service Port	1 x 10/100/1000/2500BASE-T uplink port (WAN)
Status LED	Gervice Port	4 x 10/100/1000BASE-T downlink ports (LAN)
Power Supply  DC 12 V 2.5 A  Power Consumption  Certification  DC 12 V 2.5 A  Power Consumption  Consumption	Status I ED	1 x Reyee Mesh LED
Power Consumption < 24 W  Environment Operating temperature: -10°C to +40°C (14°F to 104°F)  Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification CE, CB	Status LED	1 x System Status LED
Certification   Operating temperature: -10°C to +40°C (14°F to 104°F)	Power Supply	DC 12 V 2.5 A
Storage temperature: -40°C to +70°C (-40°F to +158°F)  Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Power Consumption	< 24 W
Operating humidity: 20% RH to 80% RH (non-condensing)  Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB	Environment	Operating temperature: -10°C to +40°C (14°F to 104°F)
Storage humidity: 5% RH to 95% RH (non-condensing)  Desk mount Wall mount  Certification  CE, CB		Storage temperature: –40°C to +70°C (–40°F to +158°F)
Mounting  Desk mount  Wall mount  Certification  CE, CB		Operating humidity: 20% RH to 80% RH (non-condensing)
Mounting Wall mount Certification CE, CB		Storage humidity: 5% RH to 95% RH (non-condensing)
Wall mount  Certification  CE, CB	Manustina	Desk mount
	wounting	Wall mount
<b>MTBF</b> ≥ 30,000 hours	Certification	CE, CB
	MTBF	≥ 30,000 hours

## 1.5 Power Consumption

The router complies with the European Commission (EC) Regulation No. 1275/2008 and Regulation No. 801/2013.

- (1) Enable or disable Wi-Fi: Log in to the router's web interface, and choose **More** > **Wi-Fi-Switch** to enable or disable Wi-Fi.
- (2) Network standby power: < 8 W.
- (3) The product enters the network standby power mode immediately after data transmission stops.
- (4) You are advised to unplug the power cord if the router is not used for a long time.
- (5) For details about the router, visit <a href="https://reyee.ruijie.com/en-global/products/home-wifi/">https://reyee.ruijie.com/en-global/products/home-wifi/</a> to view the related documents.

Use only power supplies listed in the user instruction.

Power supply manufacturer: Chenzhou Frecom Electronics Co., Ltd.

Model: F30L7-120250SPACP Input: 100-240V~, 50/60Hz, 0.8A Output: 12.0V 2.5A

## 1.6 Cooling

• The RG-EW6000GX adopts a fanless design.

# **2** Preparing for Installation

## 2.1 Safety Guidelines

The RG-EW6000GX plays a vital role in connecting networks, and its proper functioning is crucial for ensuring the normal operation of all interconnected subnetworks.

The following safety guidelines must be followed during installation and use.

- Do not place the equipment in a wet position, and keep it away from liquid.
- Keep the equipment away from heat sources.
- Wear an ESD-preventive wrist strap during installation and maintenance.
- Do not wear loose clothing that may be snagged on components of the equipment. Tighten your belt, scarf, and sleeves.
- Keep tools and accessories away from walk areas.
- You are advised to use uninterruptible power supplies (UPSs), as it can prevent power outages and avoid power interference.

### 2.2 Site Requirements

The RG-EW6000GX must be installed and used indoors for normal operation and prolonged service life. The installation site must meet the following requirements.

- Temperature and humidity
- Cleanliness
- ESD prevention
- Preventing electromagnetic interference
- Installation site

#### 2.2.1 Temperature and Humidity

To ensure normal operation and prolonged service life of the equipment, maintain appropriate temperature and humidity conditions in the equipment room. In an environment with high relative humidity, insulating materials are prone to poor insulation or even electricity leakage. In an environment with low relative humidity, insulating gaskets may shrink, resulting in screw loosening. In a dry environment, static electricity is more likely to occur, posing a risk to the internal circuits of equipment. A high temperature can accelerate the aging process of insulation materials, greatly reducing the availability of the equipment and severely affecting its service life. The following table describes the temperature and humidity requirements.

Operating Temperature	Operating Humidity
-10°C to +40°C (14°F to 104°F)	20% to 80%

#### 2.2.2 Cleanliness

Dust poses a significant hazard to the equipment. Dust on the enclosure causes electrostatic adhesion, leading to poor contact of the metallic joints. It not only affects the service life of the equipment, but also causes communication faults. The risk of electrostatic adhesion increases when the indoor relative humidity is low.

The following table lists the requirements for dust concentration and particle size in the equipment room.

Maximum Diameter (µm)	0.5	1	3	5
Maximum Concentration (Number of Particles/m³)	1.4 x 10 <sup>7</sup>	7 x 10 <sup>5</sup>	2.4 x 10 <sup>5</sup>	1.3 x 10 <sup>5</sup>

Apart from dust, there are also requirements on the salt, acid, and sulfide in the air of the equipment room. These harmful gases will accelerate metal corrosion and component aging. Therefore, the equipment room should be properly protected against harmful gases, including SO<sub>2</sub>, H<sub>2</sub>S, NO<sub>2</sub>, NH<sub>3</sub>, and Cl<sub>2</sub>. The following table lists the limits on harmful gases.

Gas	Average (mg/m³)	Maximum (mg/m³)	
Sulfur dioxide (SO2)	0.2	1.5	
Hydrogen sulfide (H2S)	0.006	0.03	
Nitrogen dioxide (NO2)	0.04	0.15	
Ammonia gas (NH3)	0.05	0.15	
Chlorine gas (CI2)	0.01	0.3	

#### 2.2.3 ESD Prevention

The RG-EW6000GX is designed with ESD-preventive procedures during circuit design. However, excessive static electricity can still cause damage to its circuit board. Static electricity on the communication network connected to the router mainly originates from two sources:

- Outdoor high-voltage transmission lines, lightning, and other external electric fields
- Internal systems such as indoor flooring materials and the structure of the router

To prevent damage caused by static electricity, pay attention to the following:

- Keep the site as dust free as possible.
- Maintain appropriate temperature and humidity.

#### 2.2.4 Preventing Electromagnetic Interference

Interference prevention measures primarily target electromagnetic and current interferences. The following requirements should be considered to ensure effective interference prevention.

- Take interference prevention measures for the power supply system.
- Keep the equipment away from the grounding system or lightning protection grounding system of the power facility.

 Keep the equipment far away from high-frequency current equipment such as high-power radio transmitting stations and radar launchers.

#### 2.2.5 Installation Site

Regardless of whether the device is installed on a desktop or wall, ensure that the following requirements are met:

- The desktop or wall surface must be smooth and clean.
- Ethernet cables are properly connected.

### 2.3 Tools

Common Tools	Phillips screwdriver, power cords, cage nuts, diagonal pliers, and cable ties
Dedicated Tools	Wire stripper, crimper, RJ45 connector crimping plier, and wire cutter
Meters	Multimeter and bit error rate tester (BERT)



#### Note

The RG-EW6000GX is delivered without a toolkit. Prepare the preceding tools by yourself.

## 3 Installing the Router

#### A

#### Caution

Before installing the equipment, ensure that guidelines and requirements in Chapter 2 have been met.

## 3.1 Before You Begin

Carefully plan and arrange the installation location, networking, power supply, and cabling before installing the RG-EW6000GX. Ensure that the following requirements are met before installation:

- The installation site meets the temperature and humidity requirements.
- The power supply is available at the installation site, and its current meets the requirements.
- The power supply meets the requirements.
- The Ethernet cables have been deployed at the installation site.
- The installation site meets the site requirements of the equipment.
- Routers dedicated to specific users meet the specific requirements before installation.

## 3.2 Safety Precautions During Installation


To ensure the normal operation and prolonged service life of the equipment, observe the following safety precautions:

- Do not power on the equipment during installation.
- Place the equipment in a well-ventilated environment.
- Do not subject the equipment to high temperatures.
- Keep the equipment away from high-voltage power cables.
- Install the equipment indoors.
- Do not expose the router to a thunderstorm or strong electric field.
- Keep the router clean and dust-free.
- Cut off the power supply before cleaning the router.
- Do not wipe the equipment with a damp cloth.
- Do not wash the equipment with liquid.
- Do not open the enclosure when the equipment is working.
- Secure the equipment properly.

#### 3.3 Installation Guide

The router is typically placed on a horizontal surface, such as on a shelf or desktop. The device can also be mounted on the wall as shown in the following figure.







#### Note

The diameter of the screw head ranges from 5 mm (0.2 in.) to 8 mm (0.31 in.), the screw head thickness is less than 2 mm (0.08 in.), and the distance of two screws is 100 mm (3.94 in.). The screw that projects from the wall needs to be around 5 mm (0.2 in.), and the length of the screw needs to be at least 20 mm (0.79 in.) to withstand the weight of the product.

## 3.4 Bundling Cables

#### **Precautions**

- Bundle cables in an esthetically pleasing way.
- Ensure that the twisted pairs have natural bends or bends of large radius at the connectors.
- Do not overtighten the cable bundle as it may reduce the cable life and performance.

#### **Bundling Steps**

- (1) Bundle the hanging part of the twisted pairs using cable ties and lead them to the WAN/PoE port end of the router by convenience.
- (2) Fasten the twisted pairs to the cable trough of the mounting bracket.
- (3) Extend the twisted pairs under the router and route them in a straight line.

## 3.5 Verifying Installation

- Verify that the router is securely fastened.
- Make sure that the twisted pairs match the port type.
- Verify that cables are properly bundled.

# 4 Commissioning

## 4.1 Setting Up the Configuration Environment

Verify that the power cord is properly connected and compliant with safety requirements before setting up the environment.

### 4.2 Powering-on

#### 4.2.1 Checklist Before Power-on

- The power cord is reliably connected.
- The input voltage meets the requirement.

#### 4.2.2 Checklist After Power-on

- The LED status is normal.
- After the router is powered on, the SSID can be detected by a mobile phone or other wireless clients.

## 4.3 Rectifying Power Supply Failures

You can determine whether there is a power system failure by checking the LED status on the front panel of the RG-EW6000GX. For details about the working status of the LEDs, see <u>1.3.2 Ports and LEDs</u>. Perform the following checks if the power supply is not functioning properly.

- Check whether the router is properly powered.
- Check whether the Ethernet cable is properly connected.

#### Note

If the router cannot start after all the preceding items are verified, contact your local distributor or technical support.

# **5** Monitoring and Maintenance

## 5.1 Monitoring


You can observe the LEDs to monitor the RG-EW6000GX in operation.

## 5.2 Hardware Maintenance

If the hardware is faulty, please contact the Ruijie technical support.

# 6 Common Troubleshooting

## 6.1 Troubleshooting Flowchart

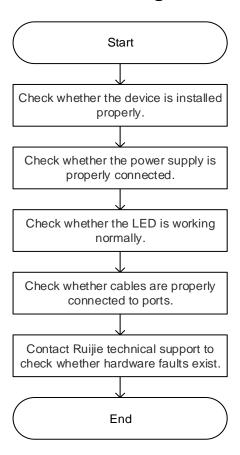

#### 6.2 Common Faults

What do I do if I cannot log in to the router's web interface (192.168.110.1)?

- (1) Ensure that the PC's NIC is set to **Obtain an IP address automatically**.
- (2) Ensure that the PC is connected to one of the LAN ports on the router, and that the port status LED is on. If the port status LED is not on, replace the Ethernet cable.
- (3) Close and re-open your browser (Google Chrome is recommended), and enter 192.168.110.1 in the address bar to try again.
- (4) Use another web browser.
- (5) Use another Ethernet cable or PC.

If the fault persists, restore the router to factory defaults by pressing the Reset button for 10 seconds.

#### What can I do if I cannot access the Internet?

- (1) Ensure that the Ethernet cable is properly connected, and that the port status LED is on.
- (2) Choose Internet on the router's web interface to check the Internet connection type.

- (3) If your ISP provides a broadband account and password, select **PPPoE** and enter the account and password. If your ISP provides IP address, subnet mask, gateway, and DNS server, then select Static IP and enter mandatory parameters.
- (4) If the fault persists, contact your ISP.

#### What can I do if I forget the admin password?

Try to enter the Wi-Fi password. If the password is still incorrect, restore the router to factory defaults.

#### How do I restore the router to factory defaults?

Use a pin to press and hold the Reset button for 10 seconds until the status LED starts blinking, then release the button. After the status LED turns solid on, the router is restored to factory defaults successfully, and you can connect to the router's Wi-Fi network (@Ruijie-sXXXX).

## **7** Appendix

## 7.1 Appendix A Connectors and Media

#### 10/100/1000BASE-T Port

7TP3+ ←

8TP3- ←

The 10/100/1000BASE-T port is a 10/100/1000 Mbps auto-negotiation port that supports automatic MDI/MDIX Crossover.

Compliant with IEEE 802.3ab, the 1000BASE-T port requires a 100-ohm Category 5e Unshielded Twisted Pair (UTP) or recommended Shielded Twisted Pair (STP) with a maximum distance of 100 meters (328.08 feet).

The 1000BASE-T port requires all four pairs of wires to be connected for data transmission. The following figure shows twisted pair connections for the 1000BASE-T port.

Straight-Through Crossover Switch Switch Switch Switch 1TP0+ ← → 1TP0+ 1TP0+← **→**1TP0+ → 2TP0-2TP0- ← **>**2TP0-3TP1+ ← → 3TP1+ 3TP1+ ← >3TP1+ → 6TP1-6TP1- ← →6TP1-→ 4TP2+ 4TP2+ ← 4TP2+ ← →4TP2+ 5TP2- ← >5TP2-5TP2- ← → 5TP2-

Figure 7-1 1000BASE-T Twisted Pair Connections

The 100BASE-TX/10BASE-T port can also be connected by cables of the preceding specifications. Besides, the 10BASE-T port can be connected by 100-ohm Category 3, Category 4, and Category 5 cables with a maximum distance of 100 meters (328.08 feet). 100BASE-TX port can be connected by 100-ohm Category 5 cables with a maximum distance of 100 meters (328.08 feet). The following figure lists definitions of pin signals for the 100BASE-TX/10BASE-T port.

7TP3+←

8TP3- ←

>7TP3+

→8TP3-

Figure 7-2 100BASE-TX/10BASE-T Pin Assignments

→ 7TP3+

→ 8TP3-

Pin	Socket	Plug
1	Input Receive Data+	Output Transmit Data+
2	Input Receive Data-	Output Transmit Data-
3	Output Transmit Data+	Input Receive Data+
6	Output Transmit Data-	Input Receive Data-
4,5,7,8	Not used	Not used

The following figure shows feasible connections of the straight-through and crossover twisted pairs for a 100BASE-TX/10BASE-T port.

Figure 7-3 100BASE-TX/10BASE-T Twisted Pair Connections

Straight-Through		Cross	over
Switch	Adapter	Switch	Switch
1 IRD+ ←	→ 1 OTD+	1 IRD+ ←	→ 1 IRD+
2 IRD- ←	→ 2 OTD-	2 IRD- ←	→ 2 IRD-
3 OTD+ <b>←</b>	→ 3 IRD+	3 OTD+←	3 OTD+
6 OTD- ←	→ 6 IRD-	6 OTD- ←	→ 6 OTD-

## **Contents**

1 Change Description	1
1.1 ReyeeOS 1.316	1
1.1.1 Hardware Change	1
1.1.2 Software Feature Change	1
2 Quick Setup (As a Primary Router)	2
2.1 Getting Started	2
2.2 Connecting to the Router	2
2.3 Logging In	2
2.4 Configuration Steps	4
2.4.1 Configuring the Internet Connection Type	4
2.4.2 Configuring a Wi-Fi Network	8
2.4.3 Configuring IoT Wi-Fi	10
3 Quick Setup (As a Secondary Router)	12
3.1 Getting Started	12
3.2 Connecting to Primary Router	12
3.2.1 Wired Connection	12
3.2.2 Wireless Connection	13
3.3 Verification and Testing	25
3.4 Manage the Device after Successful Setup	25
3.4.1 Connecting the Device	25
3.4.2 Logging In to the Web Interface	25
4 Wi-Fi Network Settings	27

4.1 Adding Wi-Fi Networks	27
4.1.1 Adding Game Wi-Fi Network	27
4.1.2 Adding Other Types of Wi-Fi Networks	27
4.2 Changing the SSID and Password	29
4.3 Enabling Band Steering	30
4.4 Hiding the SSID	31
4.4.1 Overview	31
4.4.2 Getting Started	31
4.4.3 Configuration Steps	31
4.5 Configuring the Wi-Fi Blocklist or Allowlist	32
4.5.1 Overview	32
4.5.2 Configuration Steps	33
4.6 Optimizing the Wi-Fi Network	34
4.6.1 Overview	34
4.6.2 Getting Started	35
4.6.3 Configuration Steps	35
4.7 Configuring the Healthy Mode	38
4.8 Enabling Roaming Optimization	39
4.9 Configuring Wi-Fi/IGMP	39
4.9.1 Overview	39
4.9.2 Configuration Steps	40
5 Configuring Work Mode	41
5.1 Access Point	41
5.2 Wireless Repeater	42

5.3 WISP	44
6 Configuring Network Settings	48
6.1 Configuring WAN Settings	48
6.1.1 Configuring Internet connection types	48
6.1.2 Changing the MAC Address	49
6.1.3 Modifying MTU	50
6.1.4 Configuring a Private Line	51
6.1.5 Configuring the VLAN Tag	52
6.1.6 Configuring Load Balancing Settings	53
6.1.7 Configuring WAN/LAN Conversion	54
6.2 Changing the Address of a LAN Port	55
6.3 Connecting to IPTV	56
6.3.1 Getting Started	56
6.3.2 IPTV Configuration Steps (VLAN Type)	56
6.3.3 IPTV Configuration Steps (IGMP Type)	57
6.4 Configuring IPv6	58
6.4.1 Configuring the IPv6 of the WAN Port	58
6.4.2 Configuring the IPv6 of the LAN Port	58
6.5 Configuring Auto Bandwidth Control	60
6.5.1 Viewing Network Latency	61
6.5.2 Configuring Designated Devices	61
6.5.3 Viewing Auto Bandwidth Control Device Details	62
6.5.4 Disabling Auto Bandwidth Control	62
6.6 Enabling Parental Control	63

6.6.1 Setting the Internet Block Periods	64
6.6.2 Disabling Parental Control	66
6.7 Configuring DHCP Server	67
6.7.1 Overview	67
6.7.2 Configuration Steps	67
6.8 Configuring DNS Server	69
6.8.1 Local DNS Server	69
6.8.2 Configuring DNS Proxy	70
6.9 Configuring Port Mapping	70
6.9.1 Overview	70
6.9.2 Getting Started	71
6.9.3 Configuration Steps	71
6.9.4 Verification and Testing	72
6.9.5 Solution to a Test Failure	72
6.9.6 DMZ Configuration Steps	72
6.10 Configuring DDNS	73
6.10.1 Overview	73
6.10.2 Getting Started	73
6.10.3 Configuration Steps	73
6.11 Configuring Connectivity Detection	73
6.12 Enabling CWMP	74
6.12.1 Overview	74
6.12.2 Configuration Steps	74
6.13 Configuring ARP Binding	75

	6.13.1 Overview	75
	6.13.2 Configuration Steps	75
6.14	Configuring Static Routing	76
6.15	Policy-based Routing	78
	6.15.1 Overview	78
	6.15.2 Configuration Steps	78
6.16	Enabling Smart Traffic Control	81
	6.16.1 Enabling Smart Flow Control	81
	6.16.2 Custom Policy	81
6.17	Enabling Port-Based Flow Control	82
6.18	Enabling Hardware Acceleration	82
6.19	Enabling Reyee Mesh	83
6.20	Configuring Reyee Mesh 3.0	83
	6.20.1 Parallel Networking	84
	6.20.2 AP Networking	86
6.21	Configuring UpnP	87
	6.21.1 Overview	88
	6.21.2 Configuration Steps	88
6.22	Enabling Wi-Fi Switch	88
6.23	Switching to AP Mode	88
6.24	Link Aggregation	89
6.25	Configuring Game Port Guarantee	89
	6.25.1 Overview	89
	6.25.2 Configuring Steps	90

	6.26 Configuring Auto NAT66	.90
	6.27 Configuring PPTP VPN	.91
	6.27.1 Overview	.91
	6.27.2 Configuring PPTP Server	.91
	6.27.3 Configuring PPTP Client	.92
	6.28 Configuring OpenVPN	.93
	6.28.1 Overview	.93
	6.28.2 Configuring OpenVPN (Server Mode)	.94
	6.28.3 Configuring OpenVPN (Client Mode)	.97
	6.28.4 Typical Configuration Example	.98
	6.29 Other Settings	103
7	Configuring Diagnostics1	05
	7.1 Enabling Alerts	105
	7.2 Diagnosing Network Problems	106
	7.3 Network Diagnosis Tools	107
	7.3.1 Network Test Tool	107
	7.3.2 Packet Capture Tool	107
8	System Settings1	09
	8.1 Switching to PC View	109
	8.2 Configuring the Login Password	109
	8.3 Configuring Session Timeout Duration	110
	8.4 Remote Access	110
	8.5 Configuring Backup and Import1	111
	8.6 Restoring Factory Settings	111

	8.7 Configuring System Time	112
	8.8 Configuring Reboot	113
	8.9 Configuring Scheduled Reboot	113
	8.9.1 Getting Started	113
	8.9.2 Configuration Steps	114
	8.10 Performing Online Upgrade and Displaying the System Version	114
	8.11 Turning On/Off the Indicator	115
	8.12 Switching System Language	115
9	FAQs	117
	9.1 How Do I Restore the Router to Factory Settings?	117
	9.2 What Should I Do If I Forgot the Password?	117
	9.3 How Do I Manage the Router When Used As a Range Extender After Installation is	
	Successful?	117
	9.4 What Should I Do If the System I FD Keeps Flashing After the Router is Powered On?	117

Configuration Guide Change Description

# 1 Change Description

This chapter describes the major changes in software and hardware of different versions and related documentation. For details about hardware changes, see the release notes published with software versions.

## 1.1 ReyeeOS 1.316

### 1.1.1 Hardware Change

The following table lists the applicable hardware models of this version.

Model	Hardware Version
RG-EW6000GX	1.xx

## 1.1.2 Software Feature Change

This baseline version has no software feature change.

## **2** Quick Setup (As a Primary Router)

## 2.1 Getting Started

Connect the router to a power source and connect the LAN port of the modem to the WAN port of the router.

Configure the Internet connection type according to requirements of your local Internet Service Provider (ISP). Otherwise, the Internet access may fail due to improper configuration. You are advised to contact your local ISP to confirm the Internet connection type.

Check whether the Internet connection type is PPPoE, DHCP mode, or static IP address mode.

- In the PPPoE mode, a username, a password, and possibly a service name are needed.
- In the static IP address mode, an IP address, a subnet mask, a gateway, and a DNS server need to be configured.
- In L2TP mode: First, check whether the uplink device (like a modem) connects via DHCP or static IP.
  - DHCP: Enter the username, password, and server IP or domain name provided by the L2TP service provider.
  - Static IP: In addition to the username, password, and server IP or domain name from the L2TP service provider, enter the static IP address assigned by the uplink device, subnet mask, gateway IP address, and DNS server address.

## 2.2 Connecting to the Router

You can open the management page and complete Internet access configuration only after connecting a smartphone or laptop to the router. You can connect a smartphone or laptop to the router in the following way.

Wired Connection

Connect a local area network (LAN) port of the router to the network port of the PC, and configure **Obtain** an **IP** address automatically on the PC.

Wireless Connection

On a smartphone or laptop, search for the Wi-Fi network **@Ruijie-s**XXXX (XXXX is the last four digits of the MAC address of each device). The default SSID and login address can be found on the bottom label of the router.

## 2.3 Logging In

After a PC is connected to the router in the initial state, the setup page is displayed. If the setup page is not displayed, enter the device IP address in the address bar of the browser to navigate to the login page, and then enter the password to log in.

Table 2-1 Default Configuration


Item	Default Value
Device IP address (http or https)	192.168.110.1
Password	No password is required at your first login. You can configure the router directly.

Enter the IP address of the router (default: <u>192.168.110.1</u>) or <u>https://192.168.110.1</u> in the address bar of your browser, and press **Enter**. The login page is displayed.

- Supported browsers: Google Chrome, and Internet Explorer 9 to 11. If an unsupported browser is used, you
  may encounter various errors or problems such as garbled text or formatting errors.
- If you forget the IP address or password, hold down the **Reset** button for more than 10 seconds to restore the router to factory settings. After restoration, you can use the default IP address and password to log in.

#### Caution

- Restoring factory settings will delete existing configuration. You will be required to configure Internet access again at your next login. Therefore, exercise caution when performing this operation.
- If you choose to retain the configuration while restoring the router to its factory settings, the router will be reset to its default configurations while retaining the network settings, Wi-Fi parameters, and time zone configuration.
- If the router in the initial state detects that the IP address of the primary router is 192.168.110.1, the router automatically changes its own IP address to 192.168.111.1 to avoid an IP address conflict. You may fail to log in to the router during the IP address change, but can reconnect to the Wi-Fi network and complete configuration one minute later.
- If you enter <a href="https://192.168.110.1">https://192.168.110.1</a> in the address bar of your browser, and press Enter, the following page will be displayed. Click Advanced > Continue to 192.168.110.1(unsafe) to access the login page.

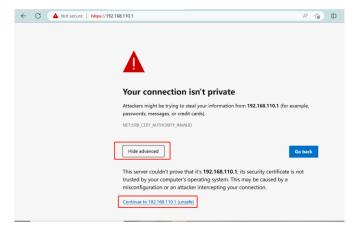

• If you forget your password and enter the incorrect password to log in, you will need to wait for 10 minutes after each 10 unsuccessful attempts.



## 2.4 Configuration Steps

#### 2.4.1 Configuring the Internet Connection Type

Click Configure and select the Internet connection type confirmed by your local ISP.





When the system detects that the device's WAN port is connected to an Ethernet cable, and has an active Internet connection, it will skip Internet setup, and will display the Wi-Fi setup page.

DHCP: The router detects whether it can obtain an IP address from a DHCP server by default. If the router
connects to the Internet successfully, you can click Next without entering an account.


#### A

#### Caution

If the IP address delivered by the primary router is 192.168.110.0, the router will automatically change the IP address of its LAN port to 192.168.111.1 to avoid IP address conflict. Do not change the configuration of the primary router. You can differentiate routers by checking the router model and Wi-Fi information on the home page.




• PPPoE: Click PPPoE, and enter the username, password. Click Next.

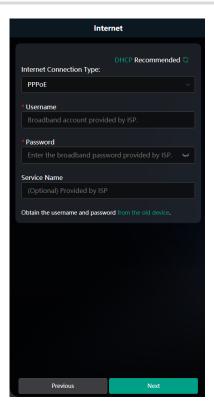

• Static IP: Enter the IP address, subnet mask, gateway, and DNS server, and click Next.



- L2TP: Select the IP address allocation type based on the L2TP VPN server information provided by the ISP:
  - o DHCP: Enter the username, password, and server IP or domain name provided by the L2TP service provider, and click **Next**.
  - Static IP: In addition to the username, password, and server IP or domain name provided by the L2TP service provider, enter the static IP address assigned by the uplink device (like a modem), subnet mask, gateway IP address, and DNS server address for internet access, and click **Next**.

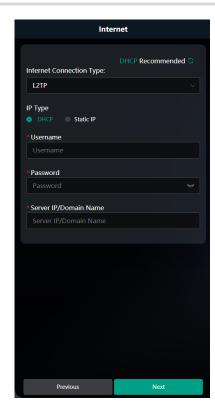




#### 0


#### Note

If the Ethernet cable is unplugged, you will be prompted to connect the Ethernet cable first. Click **perform configuration without a cable** below to connect the Ethernet cable. You can connect the Ethernet cable to the router's WAN port as indicated in the diagram, and click **Recheck** to re-check the connection status. Alternatively, you can click **Perform configuration without a cable** to enter the Internet setup page directly.

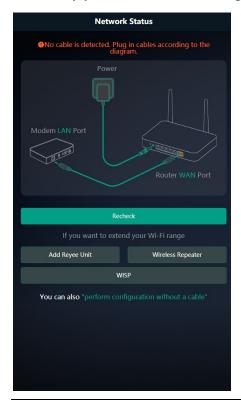


## 2.4.2 Configuring a Wi-Fi Network

(1) Click **OK** to set the management password same as the Wi-Fi password. Click **Cancel** to set a new management password on the **Wi-Fi Settings** page.

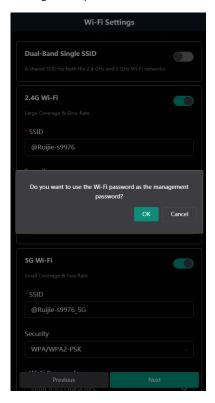

(2) On the **Wi-Fi Settings** page, you can set the network name and password for the host Wi-Fi network and Game Wi-Fi network.

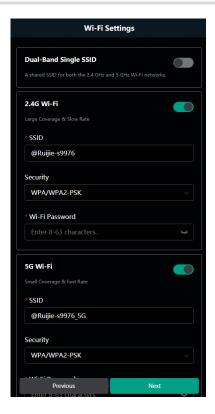

Dual-Band Single SSID: After this feature is enabled, the 2.4 GHz SSID will be consistent with the 5 GHz SSID and the 5 GHz band will be preferred. The 2.4 GHz signal is strong but easily interfered by various wireless signals. The 5 GHz band boasts fast speed, low latency and less interference.

You are advised to disable **Dual-Band Single SSID**. When this function is disabled, you can disable 2.4G or 5G Wi-Fi networks separately, and set different passwords for 2.4 GHz and 5 GHz SSIDs.

When **Dual-Band Single SSID** is enabled, you can enable **Band Steering** in the meanwhile. The 5G-capable client will access 5G radio preferentially after the function is enabled. For details, see <u>4.3</u> Enabling Band Steering.



#### Note

The terms "2.4G" and "5G" mentioned in this document only refer to the channels with the frequency of 2.4 GHz and 5 GHz, and have nothing to do with the 5 G (fifth generation) Mobile Communication Technology.

Setting the SSID and Wi-Fi password: The router has no Wi-Fi password by default, indicating that the Wi-Fi network is an open network.

You are advised to configure a complex password to enhance the network security. The password must be a string of 8 to 63 characters, which can contain uppercase and lowercase letters, digits, and English characters, but cannot contain special characters such as single quotation marks ('), double quotation marks ("), or spaces. The same Wi-Fi password will be used for the 2.4 GHz Wi-Fi, 5 GHz Wi-Fi, and Game Wi-Fi networks.

Set an SSID for the 2.4 GHz Wi-Fi, 5 GHz Wi-Fi and Game Wi-Fi networks, respectively. If **Dual-Band Single SSID** is enabled, set only one SSID.



#### Note


To ensure security, you are advised to configure a password that contains at least eight characters, including digits, letters, and special characters when configuring the web management password and the Wi-Fi password.

## 0

#### Note

A separate password can be set for the Game Wi-Fi network on the web interface.

- Management Password: Click Same as Wi-Fi Password to set the Management Password same as the Wi-Fi Password.
- **Setting the country or region**: The Wi-Fi channel may vary from country to country. To ensure that a client searches for a Wi-Fi network successfully, you are advised to select the actual country or region.
- Setting time zone: Set the system time. The network time server is enabled by default to provide the time service. You are advised to select the actual time zone.

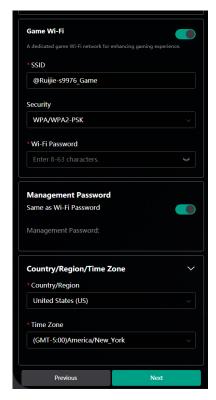

(3) Click Next. The Wi-Fi network will be restarted.

#### 2.4.3 Configuring IoT Wi-Fi





#### Note

Only smart home devices supporting IEEE 802.11b/g standards can connect to the IoT Wi-Fi.

If IoT devices exist on the network, click **Try Now** to create a separate Wi-Fi network for IoT devices to ensure reliability of network connection. For details about Wi-Fi configuration, see <u>2.4.2 Configuring a Wi-Fi Network</u>.

**Dual-Band Single SSID:** When this function is disabled, you can disable 2.4G or 5G Wi-Fi networks separately, and set different passwords for 2.4G and 5G SSIDs.

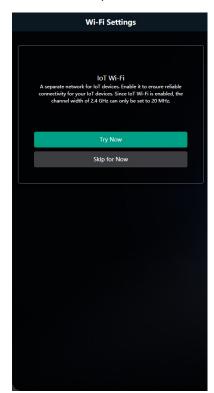

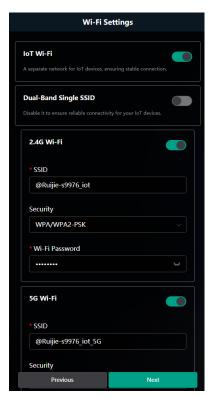

Click Next. Wait for a certain period of time for the settings to apply.




# **3** Quick Setup (As a Secondary Router)

## 3.1 Getting Started

- Before configuring this router as a secondary router, configure the primary router and verify that the primary router can access the Internet.
- The router supports both wireless and wired connection. If an Ethernet cable is available, you are advised to connect the secondary router to the primary router through wired connection.
- If no Ethernet cable is available, place the secondary router in a place where it can scan at least two-bar Wi-Fi signal of the primary router.

## 3.2 Connecting to Primary Router

#### 3.2.1 Wired Connection

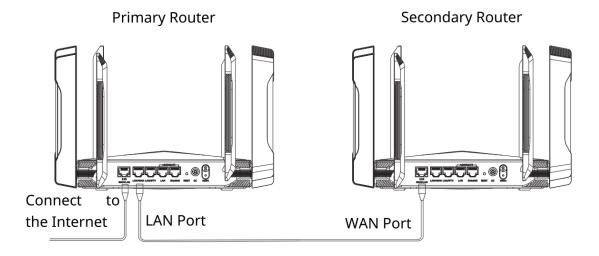

- (1) Connect to the primary router: Use an Ethernet cable to connect the WAN port of the secondary router to the LAN port of the primary router.
- (2) Power the secondary router on. Wait for the SYS LED on the secondary router to be steady on. Then, press the Reyee Mesh button on the primary router to establish wired connection. The default SSID and password of the secondary router are automatically synchronized to be the same as those on the primary router.



Make sure that the secondary router is in the factory default state. If the secondary router has been configured, first restore it to factory default settings by pressing and holding the **Reset** button for 10 seconds, and then repeat Step 2.

#### 3.2.2 Wireless Connection

To use this router to wirelessly extend the Wi-Fi range of the primary router, simply connect this router to a power source.

#### 1. Wireless Connection by using the Reyee Mesh function

When both the primary router and secondary router are Reyee Home Wi-Fi routers, you can enable the Reyee Mesh feature to extend the Wi-Fi range of the primary router.

- (1) Place the second router within 2 meters of the primary router, power it on and wait for it to start up.
- (2) Press the Reyee Mesh button on the primary router to complete the wireless Reyee Mesh networking in 2 minutes. The SSID and password of the secondary router are automatically synchronized with those of the primary router.
- (3) Place the secondary router in a location where the Wi-Fi signal needs to be extended, and power it on.



#### Caution

No Ethernet cable is required in the wireless repeater mode. The wireless network stability can be affected by many factors. Therefore, the wired connection is recommended.


#### 2. Wireless Connection by Web configuration

When the primary router is a non-Reyee Home Wi-Fi router, to wireless connect this router to the primary router, you can log in to its web interface and connect this router to the Wi-Fi network of the primary router.

Connect the router to a power source and log in to the web interface. For details, see <u>2.2 Connecting to the Router and 2.3 Logging In.</u>

Click Configure.




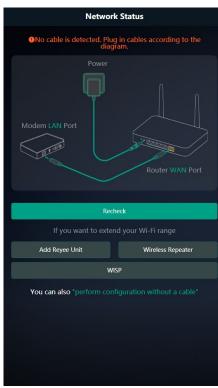


- Wireless Repeater
- (1) Select Wireless Repeater.

Wireless repeater mode: Click **Wireless Repeater**, and the SSID of the primary router, and enter the Wi-Fi password to connect to the primary router.

o In wireless repeater mode, only Wi-Fi signals are extended and the DHCP function is disabled. The IP addresses of all clients connected to the primary and secondary routers are assigned by the primary router. If the device connects to the primary router in wireless repeater mode, the WAN port of the device keeps unchanged. If WAN cable is plugged in, the device automatically switches to the wired repeater mode.

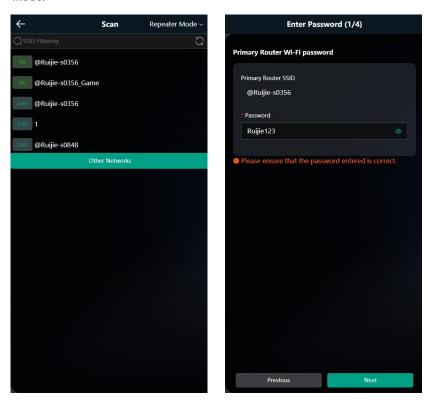

(2) Click **Next**. Click **OK** to set the management password same as the Wi-Fi Password. Click **Cancel** to set a new management password on the **Wi-Fi Settings** page.

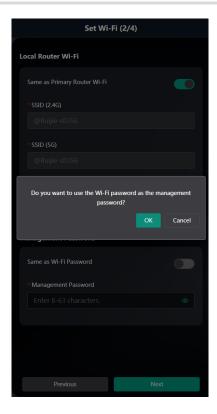

- (3) On the **Set Wi-Fi** page that opens, set the SSID and management password for the extender.
  - o You can toggle on **Same as Primary Router Wi-Fi**, in which the SSID and password will be same as the primary router Wi-Fi. If the primary router Wi-Fi is an open network, a separate management password should be set for the extender.
  - o You can toggle off **Same as Primary Router Wi-Fi** to set a new Wi-Fi SSID and password for the extender.



Click Same as Wi-Fi Password to set the Management Password same as the Wi-Fi Password.



#### (4) Configuring IoT Wi-Fi




#### Note

Only smart home devices supporting IEEE 802.11b/g standards can connect to the IoT Wi-Fi.


IoT Wi-Fi is a separate network for IoT devices. Enable it to ensure reliable connectivity for your IoT devices. If IoT Wi-Fi is enabled, the channel width of 2.4 GHz can only be set to 20 MHz.

**Dual-Band Single SSID:** When this function is disabled, you can disable 2.4G or 5G Wi-Fi networks separately, and set different passwords for 2.4G and 5G SSIDs.

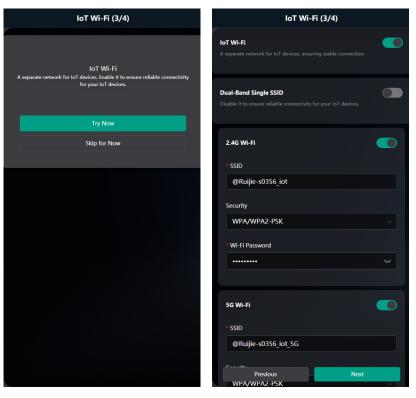


Click Next.

(5) Choose the **Country/Region** and **Time Zone**. You are advised to choose the correct country or region, as well as the appropriate time zone.

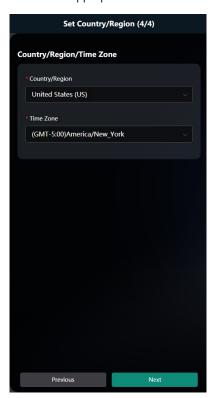

(6) Click Next.

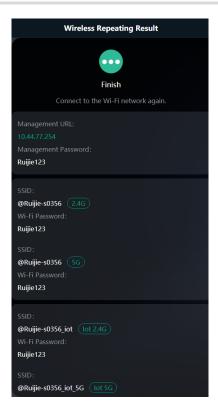

#### WISP


In this mode, the device enables multiple users to share Internet connection from WISP. The LAN port devices share the same IP from WISP through Wireless port. While connecting to WISP, the Wireless port works as a WAN port. The Ethernet port acts as a LAN port



In the WISP mode, the device still supports routing and DHCP. The clients connected to the primary router are assigned IP addresses by the primary router; the clients connected to the secondary router are assigned IP addresses by the secondary router.


(1) Click WISP. Select the Wi-Fi of the primary router.



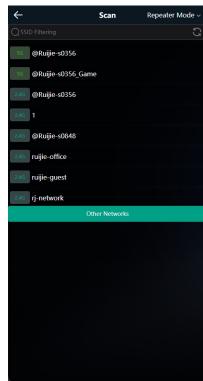


- (2) Enter the password of the primary router Wi-Fi, and select an Internet access mode. For details, see <u>2.4.1</u> Configuring the Internet Connection Type.
  - o Select DHCP and the extender will automatically obtain an IP address.
  - o If the primary router cannot assign IP addresses, select **Static IP**.
  - o In the PPPoE mode, a username, a password, and possibly a service name are needed.
  - o If the Internet connection type provided by the ISP is L2TP, then select **L2TP**. Select the IP address allocation type based on the actual situation, and enter the username, password, and other information.



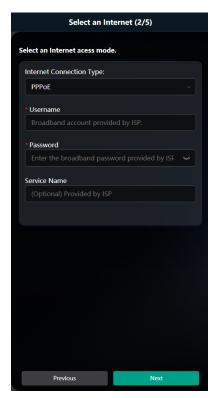






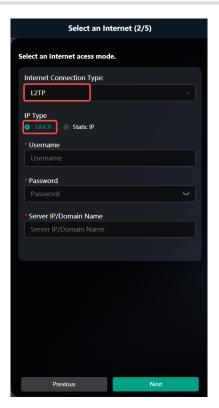




Click Next. Verify the Internet settings. Then, click OK.

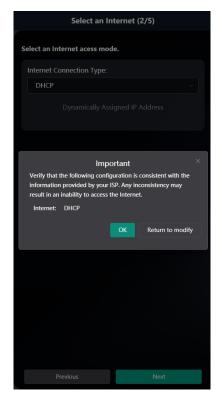

(3) Click **Next**. On the **Set Wi-Fi** page that opens, enter the Wi-Fi SSID and password and management password for the extender.

Click **OK** to set the management password same as the Wi-Fi Password. Click **Cancel** to set a new management password on the **Wi-Fi Settings** page.

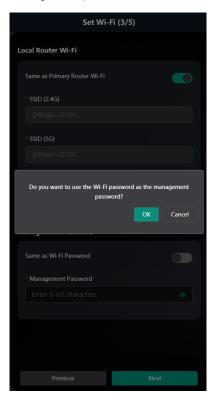

- o You can toggle on **Same as Primary Router Wi-Fi**, in which the SSID and password will be same as the primary router Wi-Fi. If the primary router Wi-Fi is an open network, a separate management password should be set for the extender.
- o You can toggle off **Same as Primary Router Wi-Fi** to set a new Wi-Fi SSID and password for the extender.



Click Same as Wi-Fi Password to set the Management Password same as the Wi-Fi Password.



#### (4) Configuring IoT Wi-Fi




#### Note

Only smart home devices supporting IEEE 802.11b/g standards can connect to the IoT Wi-Fi.


IoT Wi-Fi is a separate network for IoT devices. Enable it to ensure reliable connectivity for your IoT devices. If IoT Wi-Fi is enabled, the channel width of 2.4 GHz can only be set to 20 MHz.

**Dual-Band Single SSID:** When this function is disabled, you can disable 2.4G or 5G Wi-Fi networks separately, and set different passwords for 2.4G and 5G SSIDs.

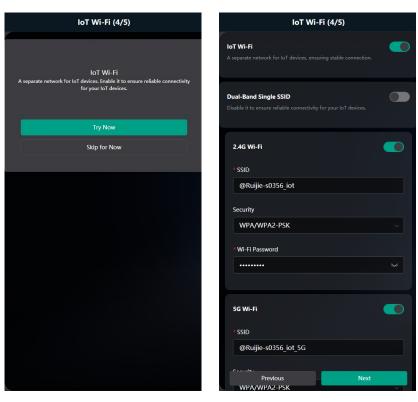

Click Next.

(5) Choose the **Country/Region** and **Time Zone**. You are advised to choose the correct country or region, as well as the appropriate time zone.

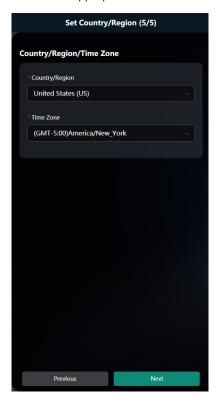

(6) Click **Next** to complete the configuration.



## 3.3 Verification and Testing

You can access the Internet after connecting to the Wi-Fi network of the primary router.

## 3.4 Manage the Device after Successful Setup

After successful setup, you can manage the router by accessing its web interface.

#### 3.4.1 Connecting the Device

Connect your smartphone or PC to the router via a wired or wireless connection.



Note

If the router is in WISP mode, you are advised to connect your PC to the router via a wired connection.

Wired Connection

Connect your PC to the LAN/WAN port of the router using an Ethernet cable, and configure **Obtain an IP** address automatically on the PC.

Wireless Connection

On your smartphone or PC, search for and connect to the Wi-Fi network of the router.

### 3.4.2 Logging In to the Web Interface

Login using the default IP address

Enter the default IP address (192.168.110.1) or <a href="https://192.168.110.1">https://192.168.110.1</a> in the address bar of your browser, and press **Enter**. The login page is displayed. For details, see <a href="2.3">2.3</a> <a href="Logging In.">Logging In.</a>

Login using an obtained IP address

If you fail to log in using the default IP address, you can obtain an IP address from the primary router for login. The steps are as follows:

- a Log in to the web interface of the primary router to find the current IP address of the router.
- b Enter this IP address in the address bar of your browser, and press Enter. The login page is displayed.

If you encounter any issues during this process, feel free to seek help from the official website at <a href="https://reyee.ruijie.com">https://reyee.ruijie.com</a> or reach out to customer service by emailing <a href="mailto:service-ri@ruijienetworks.com">service-ri@ruijienetworks.com</a>.

# 4 Wi-Fi Network Settings

## 4.1 Adding Wi-Fi Networks

This router supports four types of Wi-Fi networks, which are default Wi-Fi, Game Wi-Fi, Guest Wi-Fi and Smart Home Wi-Fi networks.

Smartphone View: Choose Wi-Fi > Wi-Fi Settings.

Click the target Wi-Fi network.

PC View: Choose More > WLAN > Wi-Fi > Wi-Fi Settings/Guest Wi-Fi/ IoT Wi-Fi.

#### 4.1.1 Adding Game Wi-Fi Network

On the Wi-Fi Settings page, choose Wi-Fi > Wi-Fi Settings, enable Game-Wi-Fi and change the SSID and password of the Game Wi-Fi.





## 4.1.2 Adding Other Types of Wi-Fi Networks

#### 1. Overview

In addition to the Game Wi-Fi network, this router also supports other three types of Wi-Fi networks: primary Wi-Fi network, guest Wi-Fi network, and IoT Wi-Fi network. Only one Wi-Fi network can be configured for each type.


- Primary Wi-Fi: The primary Wi-Fi network is listed in the first line of the page and is enabled by default.
- Guest Wi-Fi: This Wi-Fi network is provided for guests and is disabled by default. It supports user isolation, that is, access users are isolated from each other. They can only access the Internet via Wi-Fi, but cannot


access each other, improving security.

• **IoT Wi-Fi**: The IoT Wi-Fi network is disabled by default. Smart clients can connect to the IoT Wi-Fi network for long. You can set an effective time for the IoT Wi-Fi network which will only be enabled during the set effective time.

#### 2. Configuration Steps

Click Add New and set the SSID and password.

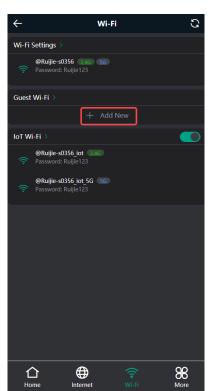

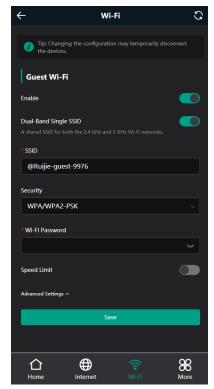

Dual-Band Single SSID: After this feature is enabled, the 2.4 GHz SSID will be consistent with the 5 GHz SSID and the 5 GHz band will be preferred. The 2.4 GHz signal is strong but easily interfered by various wireless signals. The 5 GHz band boasts fast speed, low latency and less interference.

You are advised to disable **Dual-Band Single SSID**. When this function is disabled, you can disable 2.4G or 5G Wi-Fi networks separately, and set different passwords for 2.4 GHz and 5 GHz SSIDs.

When **Dual-Band Single SSID** is enabled, you can enable **Band Steering** in the meanwhile. The 5G-capable client will access 5 GHz radio preferentially after the function is enabled. For details, see <u>4.3</u> Enabling Band Steering.

- Effective Time: For the Primary Wi-Fi network and IoT Wi-Fi, options include Always, Weekdays,
   Weekends and Custom. When Custom is selected, you can select a custom effective time. This Wi-Fi can only be used during the effective period.
  - The Guest Wi-Fi network can be turned off as scheduled. Options include Never Disable, Disable 1 Hour Later, Disable 6 Hours Later, Disable 12 Hours later and Other Time. When the time expires, the guest network is off.
- Client Isolation/Guest Isolation: This feature is supported by Wi-Fi Settings, Guest Wi-Fi and IoT Wi-Fi.
   You can enable Client Isolation in Wi-Fi Settings and IoT Wi-Fi to prevent wireless clients of this Wi-Fi from communicating with each other.

You can enable Guest Isolation in Guest Wi-Fi to enable wireless clients on the Guest Wi-Fi to access the Internet, and to prevent them from accessing the intranet and from communicating with each other.

Speed Limit: You can set a rate limit for the Guest Wi-Fi.

You can enable Speed Limit, and set the Maximum Up Rate and Maximum Down Rate.

• Wi-Fi 6: You can enable Wi-Fi 6 to enjoy high-speed Internet access.

## 4.2 Changing the SSID and Password

Smartphone View: Choose Wi-Fi > Wi-Fi Settings.

Click the target Wi-Fi network.

PC View: Choose More > WLAN > Wi-Fi > Wi-Fi Settings/Guest Wi-Fi/loT Wi-Fi.

Change the SSID and password of the Wi-Fi network, and click Save.

#### Caution


After the configuration is saved, all online clients will be disconnected from the Wi-Fi network. Users need to enter the new password to connect to the Wi-Fi network.

You can set the encryption type and Wi-Fi password for different types of Wi-Fi networks such as 2.4 GHz Wi-Fi, 5 GHz Wi-Fi, Game Wi-Fi and Smart Wi Fi.

The encryption types supported include: Open, WPA-PSK, WPA/WPA2-PSK, WPA2-PSK, WPA3-PSK, WPA3-PSK, WPA2-PSK, WPA3-PSK, WPA3-PS SAE, and WPA3-SAE. You are advised to enable encryption and set a strong password to improve network security.

The password must be a string of 8 to 63 characters, which can contain uppercase and lowercase letters, digits, and English characters, but cannot contain special characters such as single quotation marks ('), double quotation marks ("), or spaces.



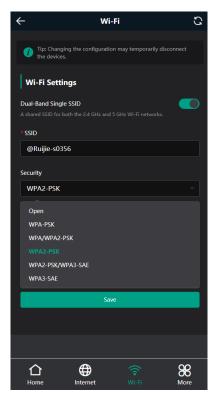

## 4.3 Enabling Band Steering



#### Caution


Before enabling the band steering, you must enable the Dual-Band Single SSID. Because the client can automatically choose to steer to either band only when the 2.4G and 5G bands use the same SSID.

Smartphone View: Choose Wi-Fi > Wi-Fi Settings.

Click the target Wi-Fi network.

PC View: Choose More > WLAN > Wi-Fi > Wi-Fi Settings/Guest Wi-Fi/ IoT Wi-Fi.

Click Band Steering. The 5 GHz-capable client will access 5 GHz radio preferentially after this function is enabled.

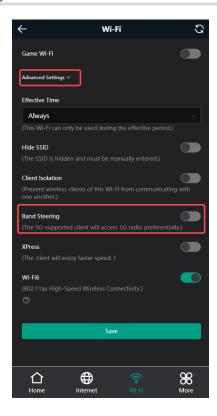

## 4.4 Hiding the SSID

#### 4.4.1 Overview

Hiding the SSID can prevent unauthorized users from accessing the Wi-Fi network and enhance network security. After this function is enabled, the smartphone or PC cannot search out the SSID. Instead, you have to manually enter the correct SSID and password.

#### 4.4.2 Getting Started

Remember the SSID so that you can enter the correct SSID after the function is enabled.

### 4.4.3 Configuration Steps

Smartphone View: Wi-Fi > Wi-Fi Settings


PC View: Choose More > WLAN > Wi-Fi > Wi-Fi Settings/Guest Wi-Fi/ IoT Wi-Fi.


On the **Wi-Fi Settings** page, enable **Hide SSID**, and click **Save**. 2.4 GHz Wi-Fi, 5 GHz Wi-Fi and Game Wi-Fi will be hidden.



#### Caution

After the configuration is saved, you have to manually enter the SSID and password before connecting any device to the Wi-Fi network. Therefore, exercise caution when performing this operation.

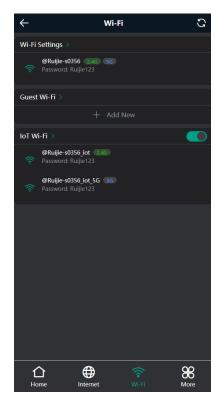

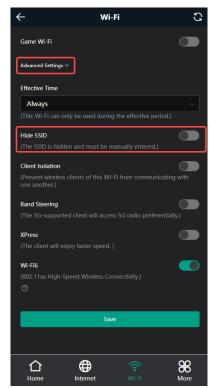



#### Note

Users need to manually enter the SSID and password each time they connect to a hidden Wi-Fi network. Take an Android-based device as an example: To connect it to a hidden Wi-Fi network, choose **WLAN > Add**network > Network name, enter the Wi-Fi name, select **WPA/WPA2** from the **Security** dropdown list, enter the password, and click **Connect**.

## 4.5 Configuring the Wi-Fi Blocklist or Allowlist

#### 4.5.1 Overview

Wi-Fi Blocklist: Clients in the Wi-Fi Blocklist are prevented from accessing the Internet. Clients that are not added to the Wi-Fi Blocklist are free to access the Internet.

Wi-Fi Allowlist: Only clients in the Wi-Fi Allowlist can access the Internet. Clients that are not added to the Wi-Fi Allowlist are prevented from accessing the Internet.



#### Note

To prevent an unknown client from invading your home network, you can create a Wi-Fi allowlist, and add common wireless clients such as home devices and IoT devices to the allowlist while blocking the access from all unknown clients.

#### 4.5.2 Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > WLAN > Blocklist / Allowlist.

PC View: Choose More > WLAN > Blocklist / Allowlist.

The following takes the blocklist configuration as an example. If you want to configure an allowlist, follow the same steps.

(1) Select the blocklist mode and click **Add**. The default mode is blocklist mode.

In the pop-up dialog box, enter the MAC address and remarks of the client to be blocklisted.

Select a client, and it will be added to the blocklist automatically. Click **OK** to save the configuration. The client will be disconnected and prevented from connecting to the Wi-Fi network.



#### Caution


This configuration prevents some devices from connecting to the Wi-Fi network. Exercise caution when performing this operation.




#### Note


To use this function, you must disable the randomized MAC address on the mobile device. The following example shows how to disable the randomized MAC address on an Android device.

Open the WLAN page of your device, press and hold the SSID broadcast by the router, and then choose **Modify network > Privacy > Use device MAC** to complete the configuration.

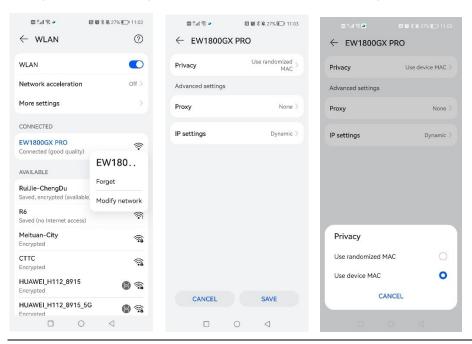

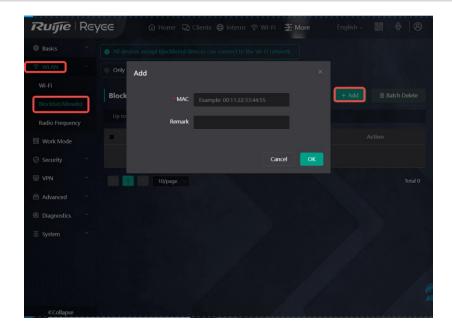

(2) Click **Delete**. The client can connect to the Wi-Fi network again.

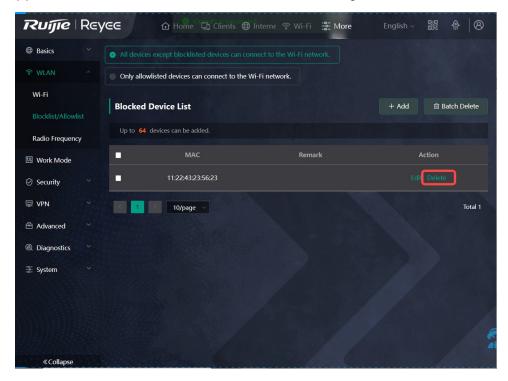

## 4.6 Optimizing the Wi-Fi Network


#### 4.6.1 Overview

The device detects the surrounding wireless environment and selects the appropriate configuration upon poweron. However, network stalling caused by wireless environment changes cannot be avoided. Restarting the router is a convenient and effective method to cope with network stalling. The router supports scheduled restart. For

details, see 8.9 Configuring Scheduled Reboot. You can also analyze the wireless environment around the router and select appropriate parameters.

#### 4.6.2 Getting Started

Install Wi-Fi Moho or other Wi-Fi scanning app on the smartphone and check interference analysis results to find out the best channel.

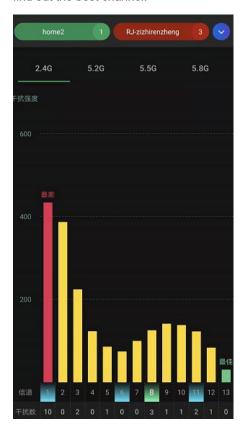

## 4.6.3 Configuration Steps

Optimizing the radio channel

Smartphone View: Choose **More > Channel Transmit Power**.

PC View: Choose More > WLAN > Radio Frequency.

Choose the best channel identified by Wi-Fi Moho or other Wi-Fi scanning App. Click Save to make the configuration take effect immediately. Excess clients connected to a channel can bring stronger wireless interference.




#### Note

The available channel is related to the country or region code. Select the local country or region.

#### Caution

The Wi-Fi network will restart after the radio channel is changed. Therefore, exercise caution when performing this operation.

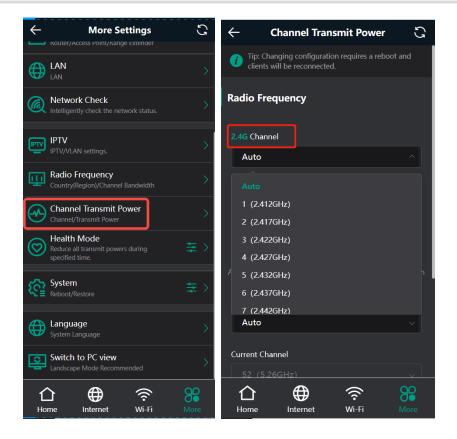

Optimizing the channel bandwidth

Smartphone View: Choose More> Radio Frequency.

PC View: Choose More > WLAN > Radio Frequency.

If the interference is severe, choose a lower channel bandwidth to avoid network stalling.

You can select 20 MHz and 40 MHz bandwidths for the 2.4 GHz band, or 20 MHz, 40 MHz, 80 MHz and 160 MHz for the 5 GHz band. The default value is "Auto", indicating that the bandwidth will be automatically selected based on the wireless environment.


The Wi-Fi network speed is more stable when the channel bandwidth is smaller, and a larger channel bandwidth makes the device more prone to interference. You are advised to select 20 MHz bandwidth for the 2.4 GHz band.

After changing the channel bandwidth, click Save to make the configuration take effect immediately.



#### Caution

After the change, the Wi-Fi network will restart, and clients need to reconnect to the W-Fi network. Therefore, exercise caution when performing this operation.

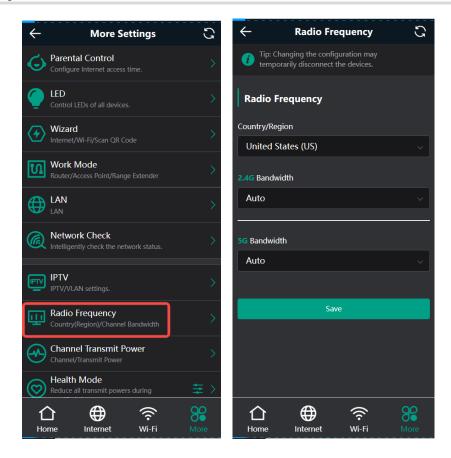

#### Optimizing the transmit power

Smartphone View: Choose More > Channel Transmit Power.


PC View: Choose More > WLAN > Radio Frequency.

A greater transmit power indicates a larger coverage and brings stronger interference to surrounding wireless routers. The default value is Auto, indicating automatic adjustment of the transmit power. In a scenario in which routers are installed densely, a lower transmit power is recommended.



#### Caution

After the change, the Wi-Fi network will restart, and clients need to reconnect to the W-Fi network. Therefore, exercise caution when performing this operation.

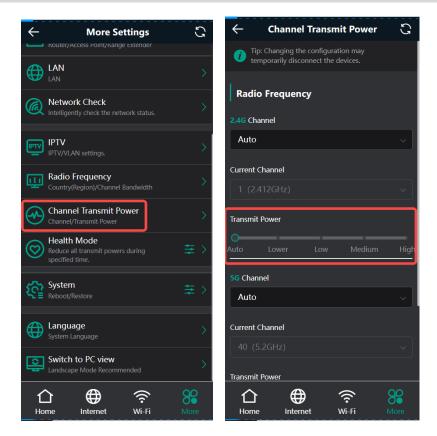

## 4.7 Configuring the Healthy Mode

Smartphone View: Choose More > Healthy Mode.


PC View: Choose More > WLAN > Wi-Fi > Healthy Mode.

Click **Enable** to enable the healthy mode. You are allowed to set the effective time period for the healthy mode.

After the healthy mode is enabled, the transmit power and the Wi-Fi coverage area will decrease. The healthy mode may reduce signal strength and cause network stalling. You are advised to disable it.



All Mesh Routers have undergone stringent radiation detection and evaluation, and comply with IEC/EN62311, EN 50385 and other standards. Wi-Fi networks will not affect human health and you can be rest assured to use them.

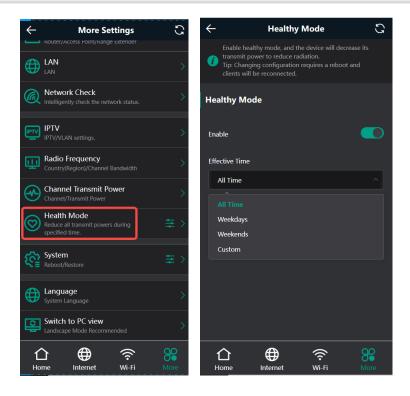


## 4.8 Enabling Roaming Optimization

Smartphone View: Choose More > Switch to PC view > More > WLAN > Wi-Fi > Roaming Optimization.

PC View: Choose More >WLAN > Wi-Fi > Roaming Optimization.

Click **Enable** to enable Roaming Optimization. Terminal devices can connect to the new router to maintain their original Internet services.

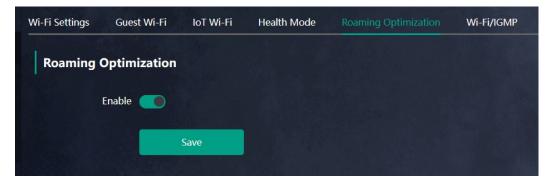

## 4.9 Configuring Wi-Fi/IGMP

#### 4.9.1 Overview

In some cases, IPTV services rely on multicast streaming. However, when it comes to wireless drivers, multicast packets are forwarded at a lower fixed rate of either 6 Mbps or 24 Mbps. This means that if a large number of multicast packets are forwarded at this lower rate, they can end up using up a significant amount of air interface resources and causing congestion, which in turn leads to an abundance of packet loss. All of this can significantly impact the user experience and make streaming slow.

When it comes to routers, the terminals connected to them are fixed, so multicast packets only need to be forwarded to specific terminals. By enabling WIFI/IGMP and converting the multicast packets into unicast packets, the packets can then be forwarded to the designated terminals in the multicast group table. This approach minimizes congestion caused by low rate multicast.

#### 4.9.2 Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > WLAN > Wi-Fi > Wi-Fi/IGMP.

PC View: Choose More > WLAN > Wi-Fi > Wi-Fi/IGMP

Click M2U (2.4 GHz) to enable WIFI/IGMP for 2.4 GHz wireless clients.

Click M2U (5 GHz) to enable WIFI/IGMP for 5 GHz wireless clients.



## **5** Configuring Work Mode

### 5.1 Access Point

Smartphone View: Choose More > Work Mode.

PC View: Choose More > Work Mode.


Connect the WAN port of this router to a LAN port of the primary router using an Ethernet cable.


Choose Access Point > Check, verify the Wi-Fi settings of this router, and click Save.

#### A

#### Caution

After the Wi-Fi settings are saved, clients connected to this router will be briefly disconnected. The Internet connection of these clients can be restored by reconnecting them to the Wi-Fi network of the primary router.

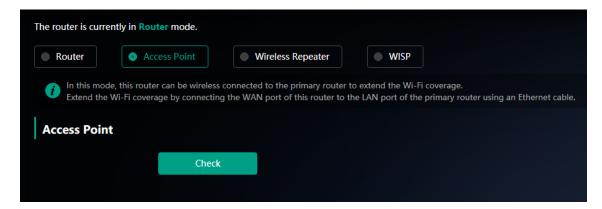

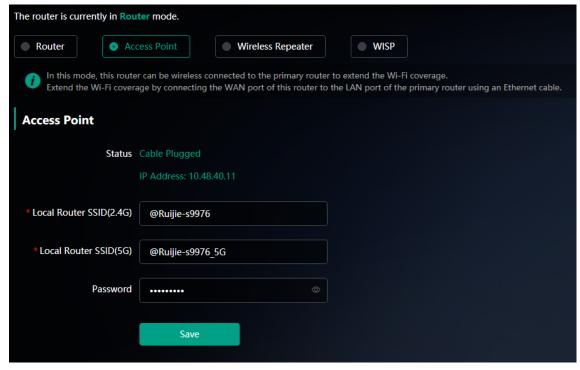


## 5.2 Wireless Repeater


Smartphone View: Choose More > Work Mode.

PC View: Choose More > Work Mode.




- For wireless repeater, first unplug the Ethernet cable from the router.
- Before configuring wireless repeater, obtain the Wi-Fi network name and password of the primary router.
- (1) Click Wireless Repeater. Verify that the Ethernet cable is unplugged, then click Cable Unplugged. Click Select, the Wi-Fi list is displayed. By default, a 5 GHz Wi-Fi list is displayed. To view a 2.4 GHz Wi-Fi list, click the 5 GHz drop-down box and select 2.4 GHz. You are advised to select a 5 GHz Wi-Fi network of the primary router for better internet experience.

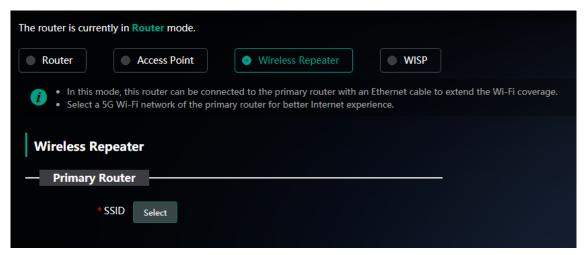

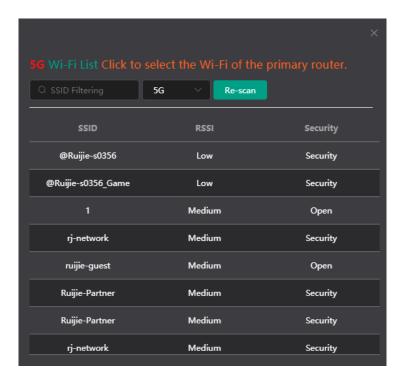


(2) Select the Wi-Fi network of the primary router to be relayed. The **Local Router** configuration item is displayed. If the primary router's Wi-Fi network is encrypted, enter the Wi-Fi password.

- (3) Configure the Wi-Fi network of the local router. You can configure the local router's Wi-Fi network to be a new Wi-Fi network or same as the primary router's Wi-Fi network.
  - o If you select **Same as Primary Router Wi-Fi**, the Wi-Fi settings of the primary router are automatically synchronized to the current router. Generally, clients merge Wi-Fi signals with the same SSID into one Wi-Fi signal, and they can search out only the Wi-Fi signal of the primary router.

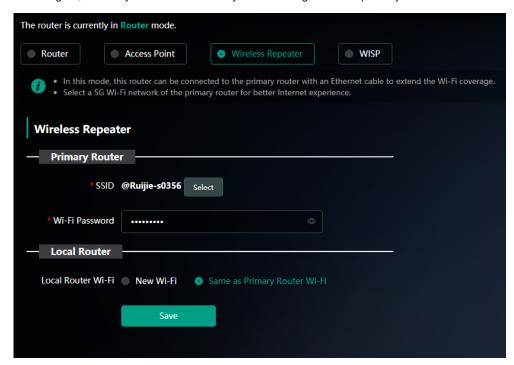

o If you select **New Wi-Fi**, you can set a local SSID and password. Clients will search out a Wi-Fi signal different from the primary router Wi-Fi signal.

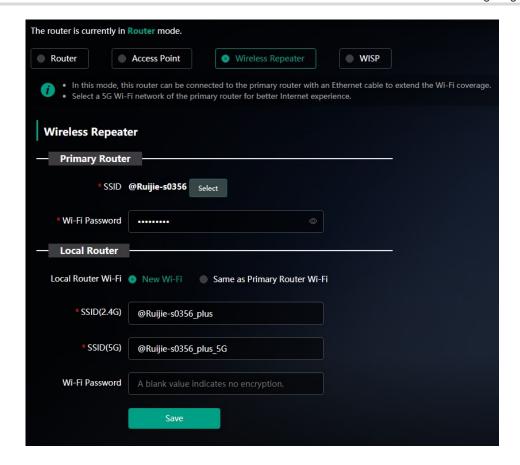

#### $\Lambda$

#### Caution

- After you click **Save**, the Wi-Fi network of the local router will be disconnected, and clients need to be connected to the new Wi-Fi network. You are advised to remember the configured SSID and password. Please exercise caution.
- You are advised to place the router in a location where at least two bars of the signal strength LED are
  on, in order to prevent severe signal loss during relaying. Otherwise, relay failure or poor signal quality
  may occur after Wi-Fi extension.


#### **5.3 WISP**

Mobile Phone View: Choose More > Work Mode


PC View: More >Work Mode


WISP allows users to establish their own WLAN for Internet access in public spaces, including coffee, hotel, airport or restaurant.

(1) Click **WISP** and select an Internet connection type. Click **Next**.

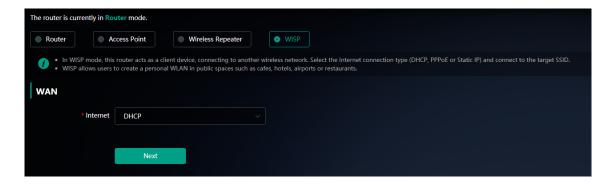


(2) Select the Wi-Fi signal of the primary router and enter its Wi-Fi password.

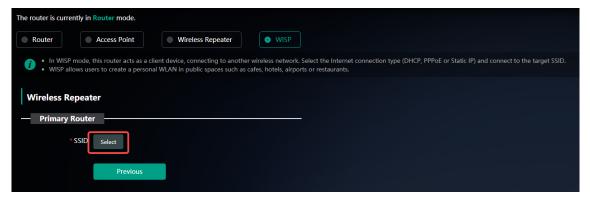


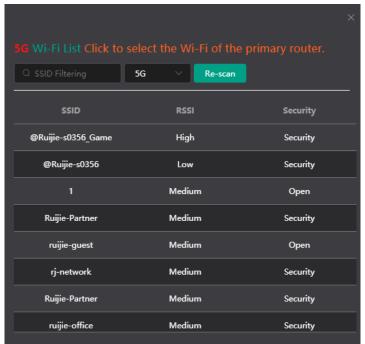

- (3) You can configure a new Wi-Fi network or have a Wi-Fi network the same as that of the primary router:
  - o If you select **Same as Primary Router Wi-Fi**, the Wi-Fi settings of the primary router are automatically synchronized to the current router. Generally, clients merge Wi-Fi signals with the same SSID into one Wi-Fi signal, and they can search out only the Wi-Fi signal of the primary router.

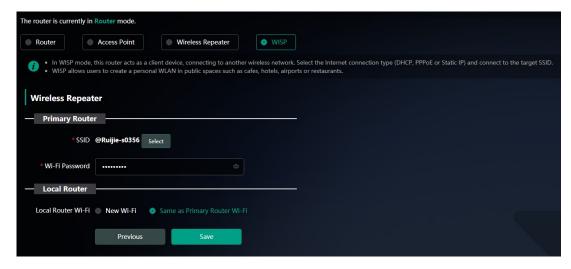

If you select New Wi-Fi, you can set a local SSID and password. Clients will search out a Wi-Fi signal different from the primary router Wi-Fi signal.

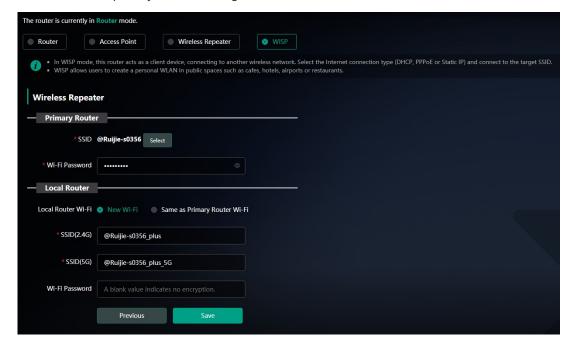


(4) Click Save.



#### Caution

After the configuration is saved, the Wi-Fi restarts. The clients need to connect to the new Wi-Fi. Remember the configured Wi-Fi name and password, and exercise caution when performing the configuration.

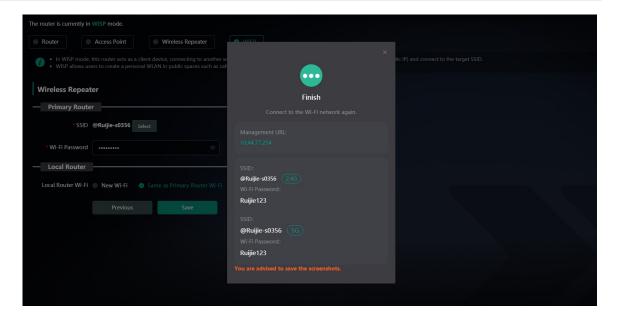

# 6 Configuring Network Settings

## 6.1 Configuring WAN Settings



Caution

This feature is supported in router mode.


Smartphone View: Choose More > Switch to PC view > More > Basics > WAN > WAN Settings.

PC View: More > Basics > WAN > WAN Settings.

#### 6.1.1 Configuring Internet connection types


This router supports single and dual WAN links, allowing dual links to operate simultaneously. In dual-link mode, in addition to setting the basic network parameters for each WAN port, you can also set the ISP and load balancing mode for the links.

The router supports four Internet connection types: PPPoE, DHCP, static IP, and L2TP. For details, see <u>2.4.1</u> Configuring the Internet Connection Type.

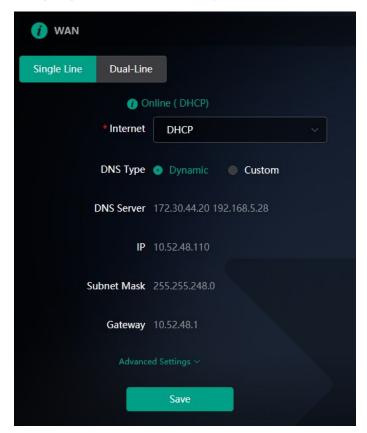


- DHCP: The router automatically obtains an IP address for Internet access.
- PPPoE: Enter the username and password provided by the ISP.
- Static IP: Enter the IP address, subnet mask, gateway, and DNS server.
- L2TP: Select the IP address allocation type based on the L2TP VPN server information provided by the ISP:

DHCP: Enter the username, password, and server IP or domain name provided by the L2TP service provider, and click Next.

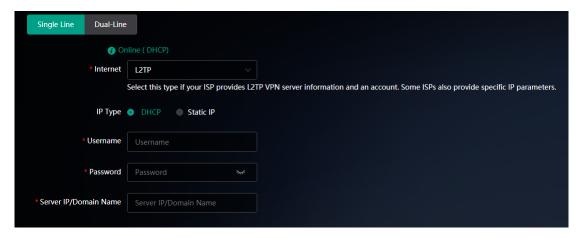

Static IP: In addition to the username, password, and server IP or domain name provided by the L2TP service provider, enter the static IP address assigned by the uplink device (like a modem), subnet mask, gateway IP address, and DNS server address for internet access, and click Next.

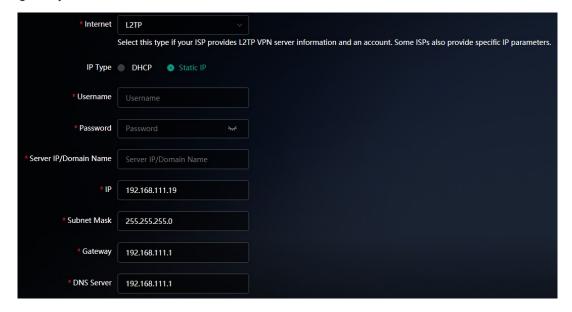

#### 6.1.2 Changing the MAC Address



#### Caution

- Changing the MAC address of the WAN port is only supported when the router is in router mode.
- This feature is only supported when the Internet Connection Type is set to DHCP, PPPoE or Static IP.

The ISP may restrict the access of devices with unknown MAC addresses to the Internet for the sake of security. In this case, you can change the MAC address of the WAN port to another address. You are advised to use the MAC address of an old router that is allowed to access the Internet (the MAC address can be found on the bottom label of the device).


Click Advanced Settings. Enter the MAC address in the format of 00:11:22:33:44:55.

If you want to change the MAC address of the LAN port, choose Basics > LAN.



#### Caution

Changing the MAC address of the LAN or WAN port will disconnect the network. You need to reconnect to the router or restart the router. Therefore, exercise caution when performing this operation.

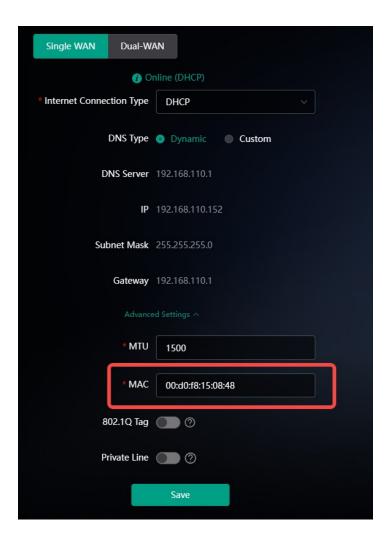

#### 6.1.3 Modifying MTU




#### Caution

- This feature is supported in router mode.
- This function is only supported when the Internet Connection Type is set to DHCP, PPPoE, or Static IP.

Sometimes, the ISP restrict the speed of large data packets or prevent large data packets from passing through. As a result, the network speed is low or even the network is disconnected. In this case, you are required to set the maximum transmission unit (MTU) to a smaller value.

Click **Advanced Settings**. The default MTU value is 1500, which is the maximum MTU size. You are advised to gradually adjust the value to 1492, 1400, or even smaller if necessary.

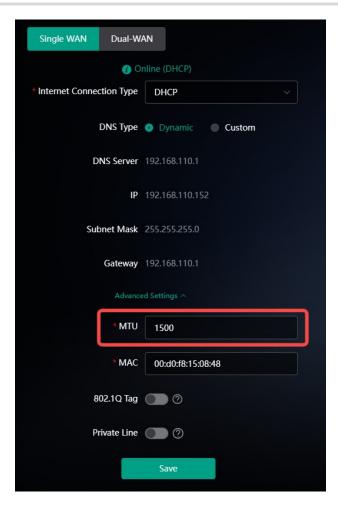

### 6.1.4 Configuring a Private Line




#### **A** Caution

This function is only supported when the Internet Connection Type is set to DHCP, PPPoE, or Static IP.

Private lines can access specific intranets, but cannot access the Internet. Private lines have a higher level of network security.

Choose **Advanced** > **Private Line** to set the current WAN link as a private line.

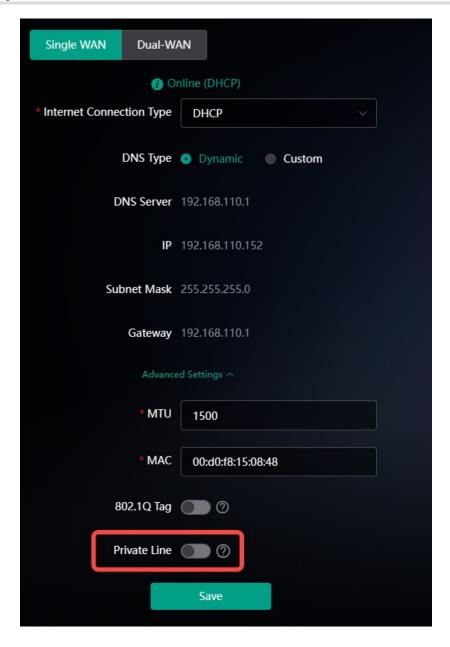

### 6.1.5 Configuring the VLAN Tag



#### Caution

This function is only supported when the Internet Connection Type is set to DHCP, PPPoE, or Static IP.

Some ISPs require that packets transmitted to their networks carry VLAN IDs. In this case, you can click **Advanced Settings**, enable the **802.1Q Tag** function and set a **VLAN ID** and **Priority** for the WAN port. By default, the VLAN tag function is disabled. You are advised to keep the VLAN tag function disabled unless otherwise specified.



## 6.1.6 Configuring Load Balancing Settings

In the case of multiple lines, after **ISP Routing** is enabled, the remaining traffic will be distributed according to the load mode.

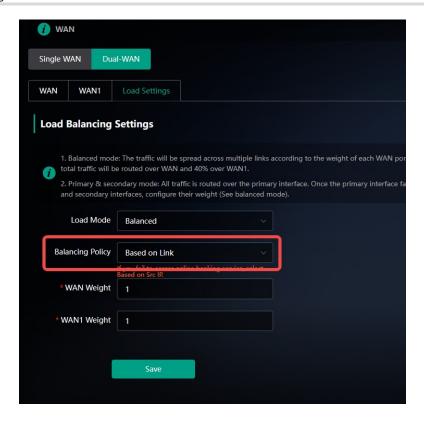


Table 6-1 **Description of Load-balancing Mode** 

Load Mode	Description
Balanced	Traffic is allocated in proportion to the weight of each WAN port. The higher the weight is, the more traffic is allocated.  The weight of each WAN port must be specified in this mode.  For example, if the weights of WAN and WAN1 ports in the dual-line mode are set to 3 and 2 respectively, then traffic will be allocated at 3:2, with 60% traffic routed to WAN port, and 40% traffic routed to WAN1 port.
Primary & secondary	When the primary interface is normal, all the traffic will be routed to the primary interface. If the primary interface fails, traffic is automatically routed to the secondary interface.  In this mode, each WAN port must be specified as a primary or secondary interface. If there are multiple primary or secondary interfaces, a weight must be set for each interface (same as the balanced mode).

### 6.1.7 Configuring WAN/LAN Conversion


Smartphone View: Choose More > Switch to PC view > More > Basics > WAN > WAN/LAN Conversion.

PC View: More > Basics > WAN > WAN/LAN Conversion.

#### Caution

After enabling this feature, the multi-line, link aggregation, and IPTV features cannot be used.

If internal network devices (such as NAS) require high transmission speeds, you can connect the device to the 2.5GE WAN/LAN port on the RG-EW6000GX, while the 1GE LAN/WAN port is used to connect to the optical modem or upstream router. Then, toggle on WAN/LAN Conversion and click Save. Then, the 1GE LAN/WAN port will be used as the WAN port, and the 2.5GE WAN/LAN port will be used as the LAN port.

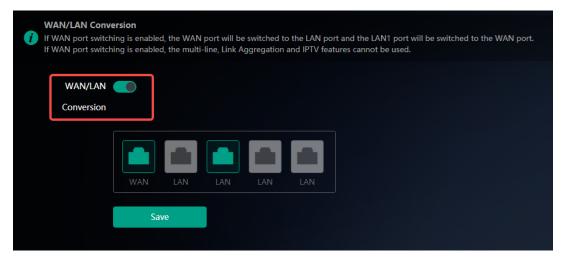

## 6.2 Changing the Address of a LAN Port

Smartphone View: Choose More > LAN.


PC View: Choose More > Basics > LAN.


Change the IP address and subnet mask, and click Save. After the IP address of a LAN port is changed, you need to log in to the web interface by using the new IP address of the LAN port.



#### Caution

Changing the IP address and subnet mask will disconnect the Wi-Fi network. You need to reconnect to the Wi-Fi network. Therefore, exercise caution when performing this operation.

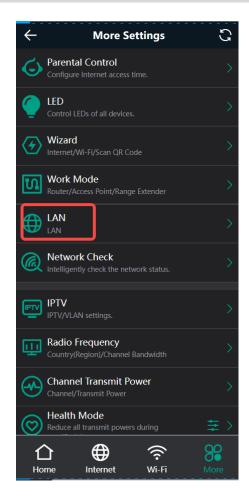

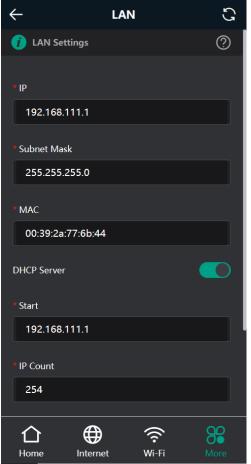

## 6.3 Connecting to IPTV



#### Caution

This feature is supported in router mode.

IPTV is an Internet television service provided by ISP.

#### 6.3.1 Getting Started

- Check whether the IPTV service has been provisioned.
- Check whether the local IPTV service is of the VLAN or Internet Group Management Protocol (IGMP) type.
   If the local IPTV is of the VLAN type, confirm the VLAN ID. If you are not sure of the IPTV type, contact your local ISP.

#### **6.3.2 IPTV Configuration Steps (VLAN Type)**

Smartphone View: Choose More > IPTV > IPTV/VLAN.

PC View: Choose More > Basics > IPTV > IPTV/VLAN.

Click to enable IPTV, and select the LAN port to be connected to the IPTV STB.

Click to enable VLAN, and enter the designated VLAN ID for IPTV provided by the ISP.

After the configuration, confirm that the IPTV STB is connected to the specified port properly. Take the following figure as an example, connect the IPTV STB to LAN2.



#### **A** Caution

Enabling this function will disconnect some devices from the network. Therefore, exercise caution when performing this operation.




## 6.3.3 IPTV Configuration Steps (IGMP Type)

Smartphone View: Choose More > IPTV > IPTV/IGMP.

PC View: Choose More > Basics > IPTV > IPTV/IGMP.

The configuration applies to FPT ISP. After it is enabled, connect the IPTV STB to any LAN port of the router.

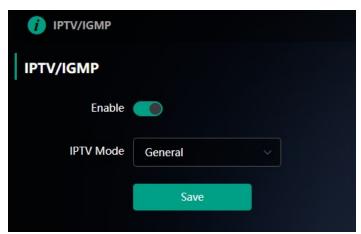

## 6.4 Configuring IPv6



#### Caution

This feature is supported in router mode.

With the popularity of the network, the IPv4 address fails to meet demands. The 128-bit IPv6 solves the problem of IPv4 address exhaustion.

Smartphone View: Choose More > Switch to PC > More > Basics > IPv6

PC View: More > Basics > IPv6

#### 6.4.1 Configuring the IPv6 of the WAN Port


Internet Connection Type: If you select **DHCP**, and the device will get an IPv6 from the upstream device. If you select **Static IP**, please configure the IPv6, gateway address and DNS server address manually. If you select **NULL**, the IPv6 function will be disabled on the WAN port.

If the DHCP mode fails, turn on **NAT66** and try again. If the fault persists, you are advised to consult the local ISP about the IPv6 status of the network.



#### Caution

When IPv6 is enabled, The MTU of IPV4 WAN port need higher than 1280.

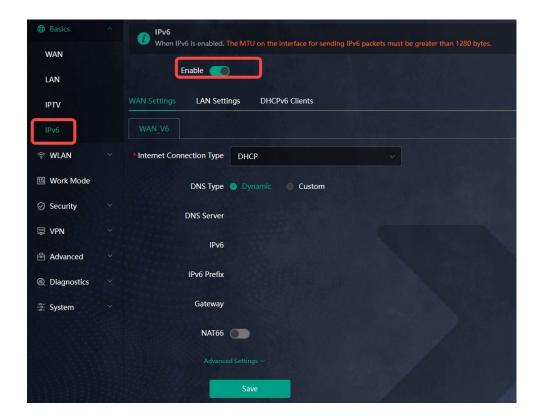

#### 6.4.2 Configuring the IPv6 of the LAN Port


Smartphone View: Choose More > Switch to PC > More > Basics > IPv6 > LAN Settings

PC View: More > Basics > IPv6 > LAN Settings


**IPv6 Assignment**: Choose **Auto** to use both DHCPv6 mode and SLAAC mode to allocate address. Choose **Null** to assign no address. You are advised to choose **Auto**.

**IPv6/Prefix Length**: If the router fails to obtain an IPv6 prefix, you can configure one manually. Set the subnet prefix length to a value smaller than or equal to 63.

Click **Advanced Settings** to perform the advanced settings. See the following figure for the recommended configuration.

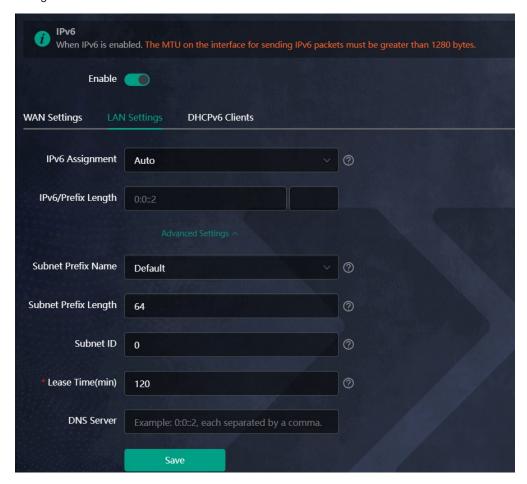

Click **DHCPv6 Clients** to view the list of clients that have obtained IPv6 from the router.

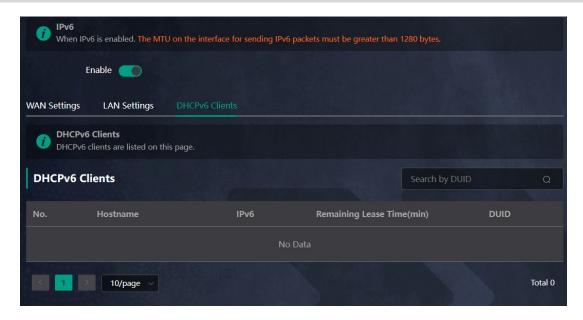

## 6.5 Configuring Auto Bandwidth Control




#### Caution

This feature is supported in router mode.

Smartphone View: Choose More > Switch to PC > Home > Auto Bandwidth Control


PC View: Home page > Auto Bandwidth Control

Click Enable. Ensure an uninterrupted gaming experience by prioritizing your game and suppressing high-traffic applications that may cause disruptions.

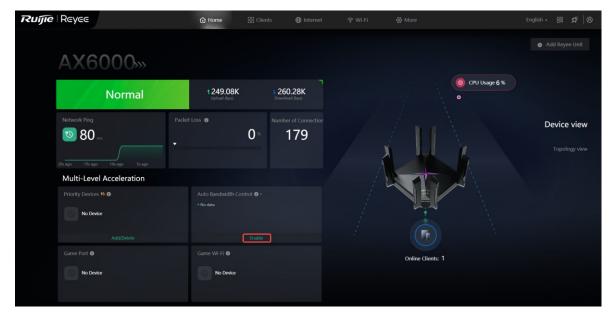

#### 6.5.1 Viewing Network Latency


After **Auto Bandwidth Control** is enabled, you can view details such as network latency and packet loss rate of the router.

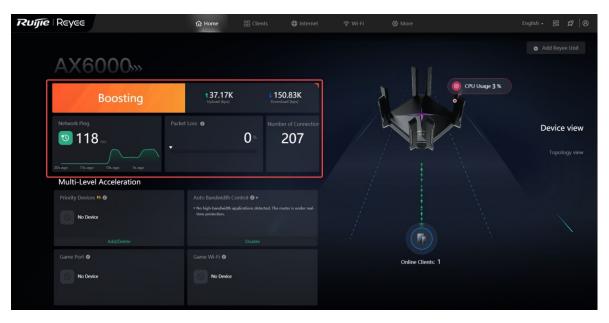


## 6.5.2 Configuring Designated Devices

Clients in the designated device list will be prioritized and protected from the interference of other heavy traffic (such as downloading large videos). A maximum of 4 designated devices can be added.


Click Add Device+ in the Designated Devices pane, select the target devices, and click Save.

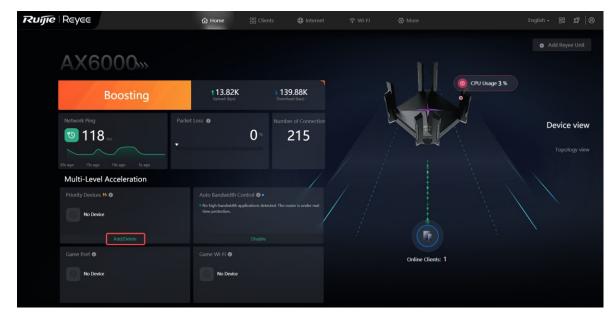

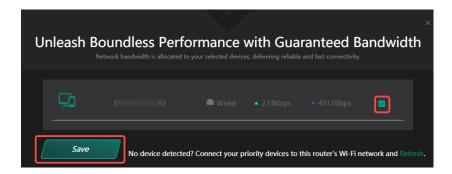


## 6.5.3 Viewing Auto Bandwidth Control Device Details

After **Auto Bandwidth Control** is enabled, you can view the boosted devices in the Auto Bandwidth Control list. You can click **View Log** to view the devices that are being boosted and device details.

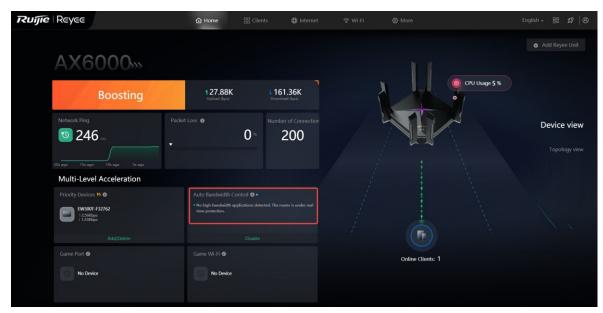

#### 6.5.4 Disabling Auto Bandwidth Control

Click **Disable** to disable the **Auto Bandwidth Control** feature.

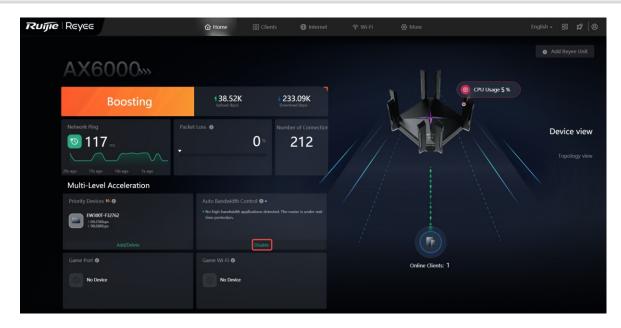

## 6.6 Enabling Parental Control

Smartphone View: Choose More> Parental Control.


PC View: Choose Clients > Manage Blocking Schedules.




#### Caution

This function is supported only in router mode.

Select a client and click **Schedule**. You can set the Internet block periods.

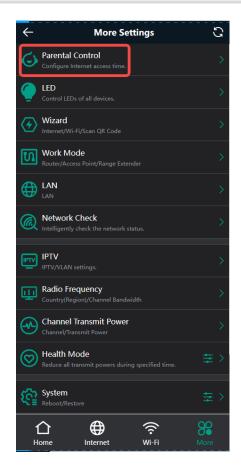

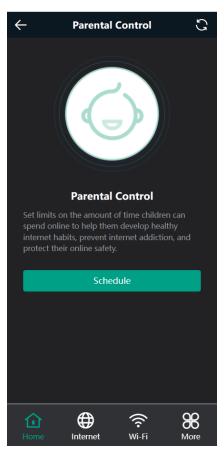



### 6.6.1 Setting the Internet Block Periods

#### 1. Setting the Internet Block Rules

Click Tap here to set to set the Internet block periods. In the block periods, the client cannot access the Internet.


You can select certain days of the week or customize the Internet block periods.

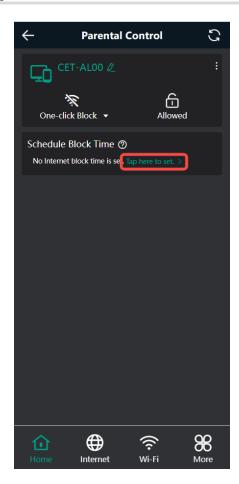

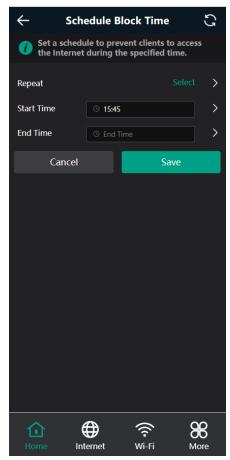


#### 2. Blocking Internet Access Temporarily

- Click One-click Block and select a period to block the client from accessing the Internet temporarily.
- Click Allowed to lift all Internet access restrictions imposed on the client on the current day. The lifting
  operation is valid only on the current day. The restrictions will be resumed the next day.

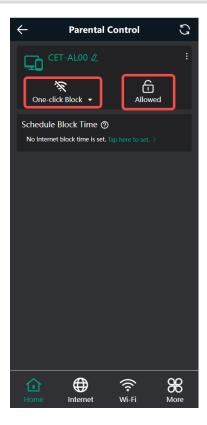

## 6.6.2 Disabling Parental Control

To disable parental control, click **Delete** in the upper right corner to lift the restrictions on the client.

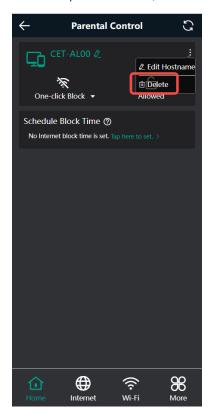

## 6.7 Configuring DHCP Server



#### Caution

This feature is supported in router mode.

#### 6.7.1 Overview

The DHCP server function enables a router to automatically assign IP addresses to clients so that clients connected to the LAN ports or Wi-Fi network of the router obtain IP addresses for Internet access. When multiple routers are connected through LAN ports, a DHCP server conflict will occur. In this case, you need to disable the DHCP server function and keep the DHCP service only on one router available. Otherwise, some devices may be disconnected from the network from time to time.

#### 6.7.2 Configuration Steps

#### 1. Configuring the DHCP Server Function

Smartphone View: Choose More > Switch to PC view > More > Basics > LAN > LAN Settings.

PC View: Choose More > Basics > LAN > LAN Settings.

DHCP Server: The DHCP server function is enabled by default. You are advised to enable it when only a single router is used. When multiple routers are connected to the primary router through LAN ports, disable this function.




#### Caution

If the DHCP server function is disabled on all routers in the network, clients cannot automatically obtain IP addresses. You need to enable the DHCP server on a router or manually configure a static IP address for each client for Internet access.

Start: Enter the start IP address of the DHCP address pool. A client obtains an IP address from the address pool. If all the addresses in the address pool are used up, the client will fail to obtain the IP address.

IP Count: Enter the number of IP addresses in the address pool. The default value is 254.

Lease Time (Min): Enter the address lease time period. When a client keeps connected, the lease is automatically renewed. If a lease is not renewed due to the client disconnection or network instability, the IP address will be reclaimed after the lease period expires. After the client connection is restored, the client requests an IP address again. The default lease period is 120 minutes.

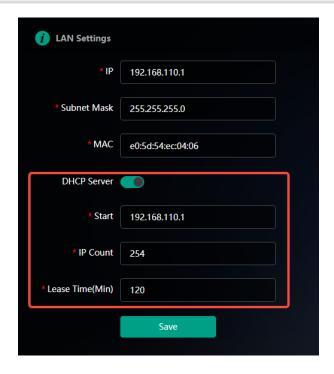

#### 2. Displaying Online DHCP Clients

Smartphone View: Choose More > Switch to PC view > More > LAN > DHCP Clients.

PC View: Choose More > LAN > DHCP Clients.

Check information about an online client. Click **Convert to Static IP**. Then, the client obtains the IP address each time connecting to the router.



## 3. Displaying the DHCP Static IP Address Table

Smartphone View: Choose More > Switch to PC view > More > LAN > Static IP Addresses.

PC View: Choose More > LAN > Static IP Addresses.

Click **Add**. In the displayed static IP address dialog box, enter the MAC address and IP address of the target client, and click **OK**. After a static IP address is bound, the client obtains the IP address each time connecting to the router.




#### 4. Configuring DHCP Option

Smartphone View: Choose More > Switch to PC view > More > Basics > LAN > DHCP Option.

PC View: Choose More > Basics > LAN > DHCP Option.

Enter the DNS address provided by the ISP, and click Save.

The DHCP Option settings are applied to all LAN ports. The **DHCP Option** configuration is optional.

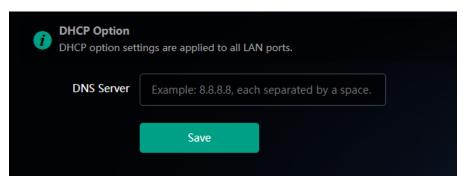

## 6.8 Configuring DNS Server


#### 6.8.1 Local DNS Server

When the WAN port uses DHCP protocol or PPPoE protocol, the router will obtain the DNS server address automatically. If the DNS server address is not delivered by the primary router, or if you need to change the DNS server, you can set a new DNS server.

Smartphone View: Choose More > Switch to PC view > More > Advanced > Local DNS server.

PC View: Choose More > Advanced > Local DNS server

In the Local DNS server field, you can set the local DNS server address. Separate multiple address with a space, if any.

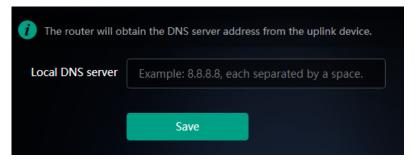

### 6.8.2 Configuring DNS Proxy



#### Caution

This feature is supported in router mode.


The domain name system (DNS) proxy configuration is not mandatory. The device obtains the DNS server address from the uplink device by default.

Smartphone View: Choose More > Switch to PC view > More > Basics > LAN > DNS Proxy.

PC View: Choose More > Basics > LAN > DNS Proxy.

DNS Proxy: The function is disabled by default and the DNS delivered by a carrier is used. If the DNS is incorrectly configured, the network is accessible and the mobile app can access the Internet properly, but the Web page cannot be opened. You are advised to disable the function.

DNS Server: Clients automatically use the DNS service provided by the primary router by default. The default configuration is recommended. After the DNS proxy function is enabled, you can enter the IP address of the DNS server. The available DNS service varies from region to region. You can consult the local ISP.

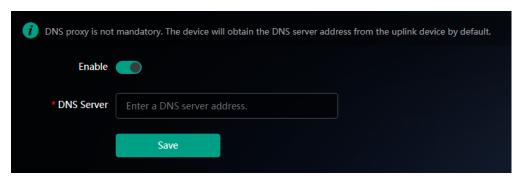

## 6.9 Configuring Port Mapping



#### Caution

This feature is supported in router mode.

#### 6.9.1 Overview

- Port mapping maps the IP address of a device on the LAN to an external network in the form of a combination of a WAN IP address and a port number, so as to provide the external network access service.
- Scenario 1: When you need to access IP cameras or PCs at home while you are away from home, port mapping needs to be configured.
- Scenario 2: When a server needs to be set up in the home network for Internet access, port mapping or demilitarized zone (DMZ) needs to be configured.
- Port mapping maps the WAN port IP address of a router to an internal network host and port so that Internet users can proactively access hosts on the LAN.
- DMZ forwards all packets from the Internet to DMZ hosts to provide the Internet access service.

#### 6.9.2 Getting Started

- Confirm the IP address of the target device in the internal network and service port ID.
- Ensure that port mapping is available in the internal network.
- Verify that your router has a public IP address. If the IP address is dynamic, changing it may cause port
  mapping failure. In this case, you are advised to use a dynamic domain name service (DDNS) to resolve any
  potential IP changes.


#### 6.9.3 Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > Advanced > Port Mapping.

PC View: Choose More > Advanced > Port Mapping.

Click **Add**. In the pop-up dialog box, enter the name, service type, protocol type, external port/range, internal IP address, and internal port/range. A maximum of 50 port mapping rules can be configured.



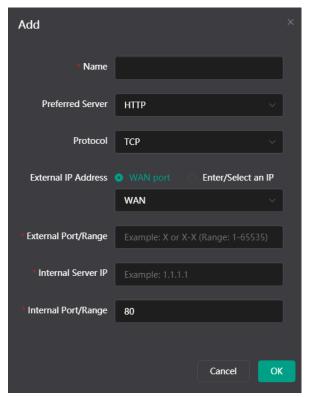

Name: Enter a name for ease of maintenance.

**Preferred Server**: Select a service to be mapped, such as HTTP or FTP. The device will automatically fill in the internal port number of the service. If you are not sure of the service, you can select **Custom**.

**Protocol**: Select the transport-layer protocol used by the selected service, such as **ALL**, **TCP**, or **UDP**. The configuration on the server end must be consistent with that on the client end.

**External IP Address**: IP address for externet access. If multiple egresses exist on the network, select a specific WAN port IP address as the IP address for externet access.

**External Port/Range**: Enter the port number used for external network access. You need to check the port number in software, such as camera monitoring software.

**Internal Server IP:** Enter the LAN IP address used by external networks to access the device, such as the IP address of an IP camera.

**Internal Port/Range**: Enter the port number used by an application accessed by external networks, such as port 8080 used by the Web service.

#### 6.9.4 Verification and Testing

Use an external device to test whether the destination service is accessible based on the external IP address and port number.

#### 6.9.5 Solution to a Test Failure


- (1) Use a new external port number and perform a test again. The test often fails on the ports blocked by firewalls of some ISPs.
- (2) Enable the remote access permission on the server. The common cause is that remote access is disabled on the server by default. As a result, the internal network access is successful but the access across different network segments fails.
- (3) Enable the DMZ service. For details, see <u>6.9.6 DMZ Configuration Steps</u>. The common cause is that port configuration is incorrect or incomplete.

#### 6.9.6 DMZ Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > Advanced > Port Mapping > NAT-DMZ.

PC View: Choose More > Advanced > Port Mapping > NAT-DMZ.

Click Enable, enter the Dest IP Address of the internal server, select the Outbound Interface, and click Save.

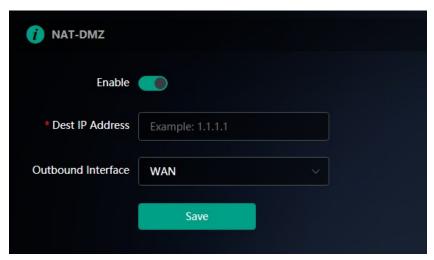

## 6.10 Configuring DDNS

#### 6.10.1 Overview

After the dynamic domain name service (DDNS) is enabled, you can use a fixed domain name on the Internet to access service resources of the router without checking the IP address of the WAN port. To make the service available, you need to register an account and domain name with a third-party DNS service provider. The router supports Dyn DNS, and No-IP DNS.

#### 6.10.2 Getting Started


Register an account and domain name at Dyn or No-IP official website.

#### 6.10.3 Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > Advanced > Dynamic DNS

PC View: Choose More > Advanced > Dynamic DNS

If you select **No-IP DNS**, or **DynDNS**, enter the registered account and password, and click **Log In**. The connection status and domain name will be displayed in the lower part of the page.

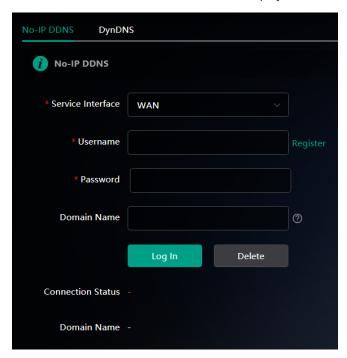

## **6.11 Configuring Connectivity Detection**

Smartphone View: Choose More > Switch to PC view > More > Advanced > Connectivity detection.


PC View: Choose More > Advanced > Connectivity detection.

Enter the values in the **Keepalive Interval**, **Probe Interval** and **URL List** fields, and click **Save** to save the settings.

**Keepalive Interval**: Interval for network connectivity detection when the network is reachable. The value range is 3 to 120 seconds.

**Probe Interval**: Interval for network connectivity detection when the network is unreachable. The value range is 1 to 30 seconds.

URL List: Domain name for network connectivity detection. A maximum of 5 URLs are supported.



## 6.12 Enabling CWMP

Smartphone View: Choose More > Switch to PC view > More > Advanced > CWMP

PC View: Choose More > Advanced > CWMP

#### 6.12.1 Overview

CPE WAN Management Protocol (CWMP) provides a general framework and protocol for management and configuration of home network devices in the next generation network. It is used for remote centralized management of gateways, routers, set-top boxes and other home network devices from the network side.


CWMP uses ACS and CPE models to manage devices. With CWMP, CPE can perform mandatory initialization and O&M actions such as service activation, function settings, file upload and download, and system detection.

With CWMP, ACS can remotely manage the software and firmware of user devices, monitor the status and performance of user devices, realize automatic configuration of user devices and dynamic service configuration, and perform communication fault troubleshooting.

#### 6.12.2 Configuration Steps

 ${\bf Click\ to\ enable\ {\bf CWMP},\ and\ configure\ the\ ACS\ account,\ password,\ address,\ and\ other\ information.}$ 

If NAT is enabled on the router, then enable STUN for NAT traversal. Click to enable **STUN**, and configure the STUN server port, account, password, and other information. Click **Save** to complete the configuration.

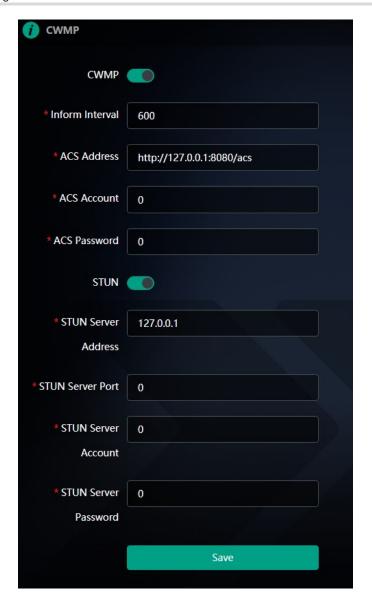

## 6.13 Configuring ARP Binding



Caution

This feature is supported in router mode.

#### 6.13.1 Overview


The router learns the ARP table from all devices connected to its ports. You can search for a device by its MAC address, perform ARP binding.

#### 6.13.2 Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > Security > ARP List.

PC View: Choose More > Security >ARP List.

Bind the MAC address and IP address on the LAN, that is, ARP binding.

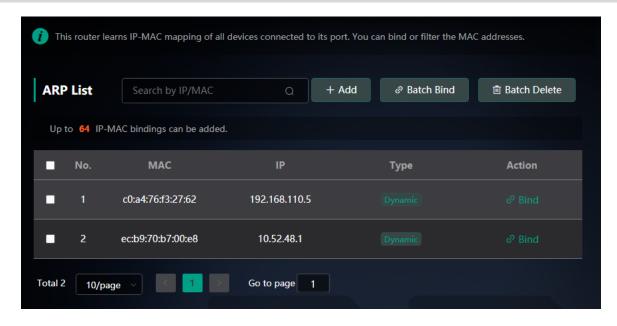

## 6.14 Configuring Static Routing


Smartphone View: Choose More > Switch to PC view > More > Advanced > Routing > Static Routing.

PC View: Choose More > Advanced > Routing > Static Routing.



Static routing does not automatically adapt to changes in network topology, and need to be reconfigured manually when the network topology changes.

Click **Add**, enter the destination IP address, subnet mask, outbound interface and next-hop IP address to create a static route.

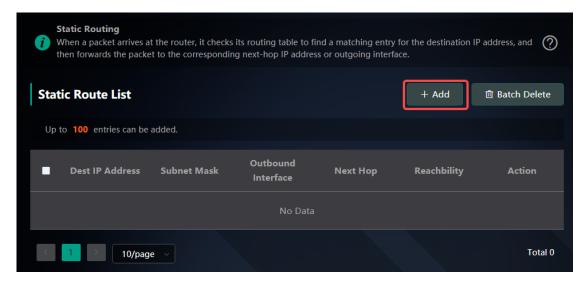


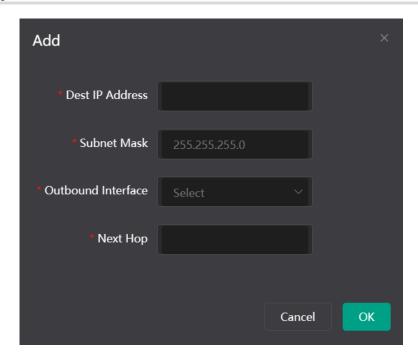


Table 6-2 Description of Static Routing Configuration

Parameter	Description
Dest IP Address	The destination network of the packet. The destination IP address of the packet is matched based on the destination IP address and subnet mask.
Subnet Mask	The subnet mask of the destination network. The destination IP address of the packet is matched based on the destination IP address and subnet mask.
Outbound Interface	Interface over which packets are forwarded.
Next Hop	The IP address of the next-hop router to which the packet will be sent. If the outbound interface is a PPPoE interface, there is no need to configure the next-hop IP address.

After a static route is created, you can view the configuration details and reachability of the route in the static route list on the **Static Routing** page. The **Reachable** column indicates whether the next hop is reachable, so as to determine whether the route can take effect normally. If **Unreachable** is displayed, check whether the next-hop address is reachable by the outbound interface of the current route by performing a ping test.

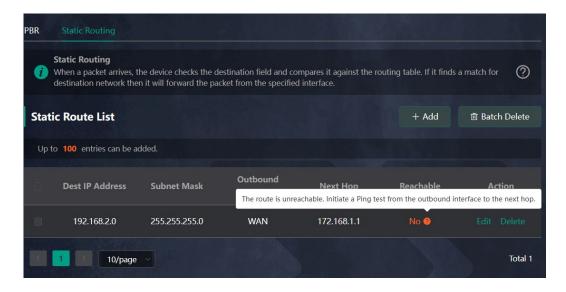

### 6.15 Policy-based Routing

Smartphone View: Choose More > Switch to PC view > More > Advanced > Routing > PBR.

PC View: Choose More > Advanced > Routing > PBR.

#### 6.15.1 Overview


Policy-based routing is a routing mechanism using user-specified policies. When the router forwards a packet, it first filters the packet according to the configured rules, and if the rules are hit, the packet is forwarded according to a certain forwarding policy. You can formulate routing rules based on specific fields (source/destination IP, protocol type) in the packet and forward it from a specific interface.

In the multi-line scenario, if a device is connected to both the Internet and the intranet through different lines, if no routing settings are made, traffic will be routed in a balanced way by default, and packets destined for the intranet may be mistakenly sent to the Internet, and vice versa, which may lead to network abnormality. Therefore, it is necessary to configure policy-based routes for segregated packet forwarding between the Internet and the intranet.

This router supports three routing policies, namely, PBR, ISP routing, and static routing. In case all three routing policies are present, the priority is: policy-based routing > static routing > ISP routing.

#### 6.15.2 Configuration Steps

Click Add to add a PBR rule.

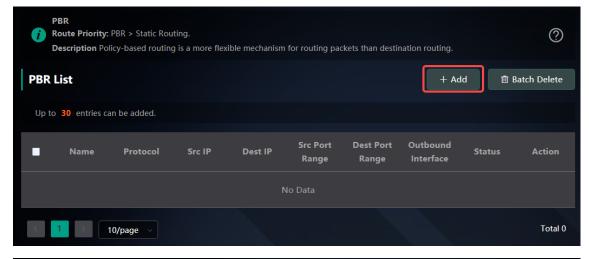

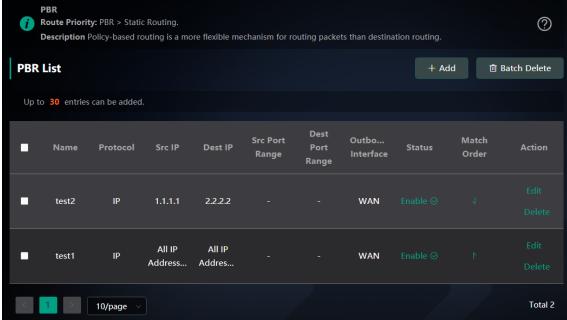


Table 6-3 Description of Policy-based Routing

Parameter	Description
Name	The name of the PBR rule, as the identifier of the PBR route. The name must be unique.
Protocol Type	The protocol for the PBR route to take effect, which can be IP, ICMP, UDP, TCP, or a custom protocol type as needed.
Protocol Number	When the protocol type is <b>Custom</b> , the protocol number is required.
Src IP/IP Range	The source IP/IP range to which the PBR rule matches. By default, All IP is selected.  All IP: Matches all source IP addresses.  Custom: Matches source IP addresses in the specified range.
Custom Src IP	The source IP address or range is required when the matching source IP/IP range is <b>Custom</b> .

Parameter	Description
Dest IP/IP Range	The destination IP/IP range to which the PBR rule matches. By default, <b>All IP</b> is selected.
	<ul> <li>All IP: Matches all destination IP addresses.</li> <li>Custom: Matches destination IP addresses in the specified range.</li> </ul>
Custom Dest IP	The destination IP address or range is required when the matching destination IP/IP range is <b>Custom</b> .
Src Port Range	This field is displayed only when the protocol type is <b>TCP</b> or <b>UDP</b> . The value in this field is the source port range matching the PBR route.
Dest Port Range	This field is displayed only when the protocol type is <b>TCP</b> or <b>UDP</b> . The value in this field is the destination port range matching the PBR route.
Outbound Interface	Interface over which packets hit the PBR rule are forwarded.
Status	You can enable or disable the toggle switch next to <b>Status</b> to enable or disable the PBR rule.

#### 0

#### Note

To restrict an access device to access only a specific intranet, you can specify the outbound interface of the PBR route as the WAN port for the private network.

The **PBR List** shows the created PBR routes, which are prioritized from top to bottom. Newly added PBR routes are at the top of the list and are prioritized. You can manually adjust the priority of PBR routes in the **Match Order** column, or click **Match Order** to set the priority for a PBR route.



## 6.16 Enabling Smart Traffic Control

Smartphone View: Choose More > Switch to PC view > More > Advanced > Flow Control > Smart Traffic Control.

PC View: Choose More > Advanced > Flow Control > Smart Traffic Control.


#### 6.16.1 Enabling Smart Flow Control

Click **Enable** and set the network bandwidth provided by the ISP. After the configuration is saved, the router adjusts the bandwidth of each client based on the total bandwidth to prevent any one client from occupying too much bandwidth.

#### A


#### Caution


After smart traffic control is enabled, speed measurement will be affected. Disable flow control if you want to do speed measurement.

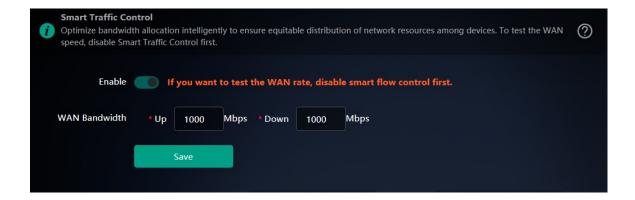

#### 6.16.2 Custom Policy

You can configure custom policies to allocate bandwidth to specific IP addresses/ranges to meet the bandwidth needs of specific users or servers. Click **Add** on the **Custom Policy** page to set the policy name, specific IP address/range, bandwidth type, and uplink/downlink rates.

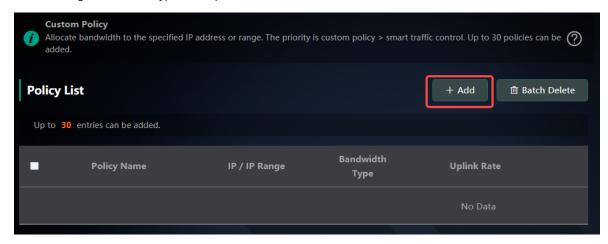

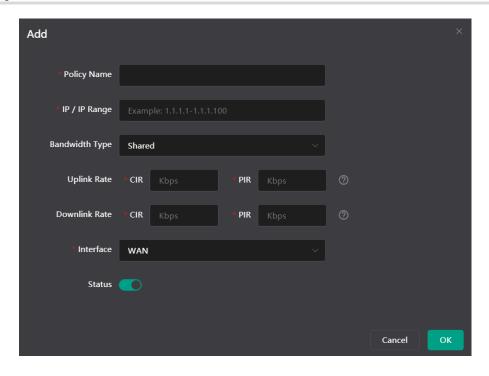


## 6.17 Enabling Port-Based Flow Control

Smartphone View: Choose More > Switch to PC view > More > Advanced > Port Settings.

PC View: Choose More > Advanced > Port Settings.

Port-based flow control can relieve the data congestion caused by ports at different speeds and improve the network speed.

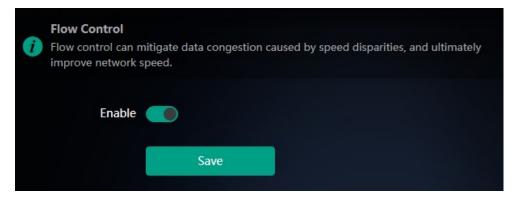

## 6.18 Enabling Hardware Acceleration

#### $\Lambda$

#### Caution

- This feature is supported in router mode.
- This feature is mutually exclusive with the Auto Bandwidth Control and Priority Devices feature. To Enable this feature, please turn off Auto Bandwidth Control and Priority Devices first.
- After hardware acceleration is enabled, IPv6 and smart flow control will be disabled.

Smartphone View: Choose More > Switch to PC view > More > Advanced > Hardware Acceleration.

PC View: Choose More > Advanced > Hardware Acceleration.

After Hardware Acceleration is enabled, the Internet access speed will be improved and clients will not be rate-limited. You are advised to enable hardware acceleration when doing speed measurement.



## 6.19 Enabling Reyee Mesh

Smartphone View: Choose More > Switch to PC view > More > Advanced > Reyee Mesh 3.0 > Reyee Mesh

PC View: Choose More > Advanced > Reyee Mesh 3.0 > Reyee Mesh

When Reyee Mesh is enabled, you can press the **Reyee Mesh** button to start mesh pairing. When Reyee Mesh is disabled, no action will be triggered by pressing the **Reyee Mesh** button.






When Reyee Mesh is disabled, bridged mesh repeaters will not be disconnected.

## 6.20 Configuring Reyee Mesh 3.0

Smartphone View: Choose More > Switch to PC view > More > Advanced > Reyee Mesh 3.0

PC View: Choose More > Advanced > Reyee Mesh 3.0


Connect the routers as indicated in the following figure:




#### 6.20.1 Parallel Networking

Parallel networking refers to connecting multiple routers in a wired manner to a modem or switch (Gigabit switch), with the modem as the network bridge, and one router elected as the master router. Other routers forward packets to the master router through the modem to access the internet, achieving network-wide unified management.

(1) Click Enable to enable Reyee Mesh 3.0.

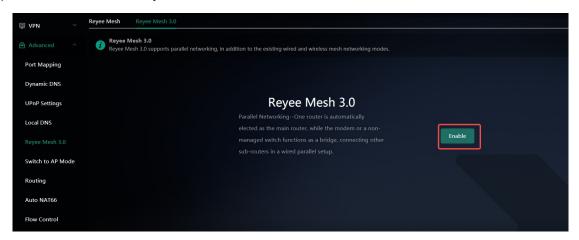


(2) Choose Parallel Networking, and click Next.

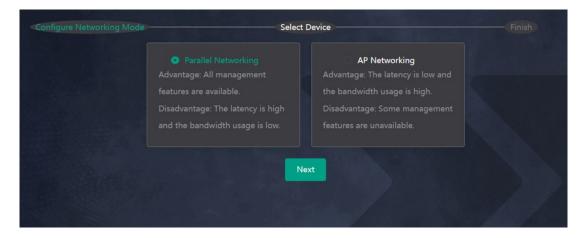


(3) Check routers for the networking.



(4) Click Next.

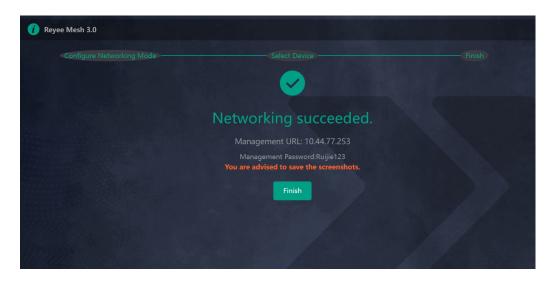

(5) Click Finish. You will be redirected to a new page.

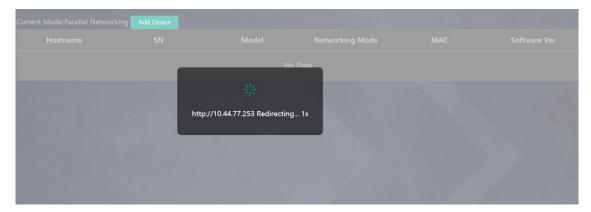


(6) On the master router page that is displayed, enter the password to log in.


#### 6.20.2 AP Networking

AP networking refers to connecting multiple routers in a wired manner to a modem or switch, with all routers working in AP mode. The modem acts as the core node for data forwarding.


(1) Click Enable to enable Reyee Mesh 3.0.

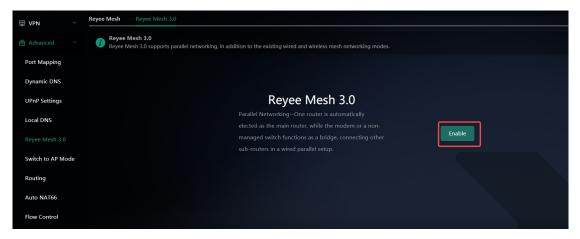


(2) Choose AP networking, and click Next.

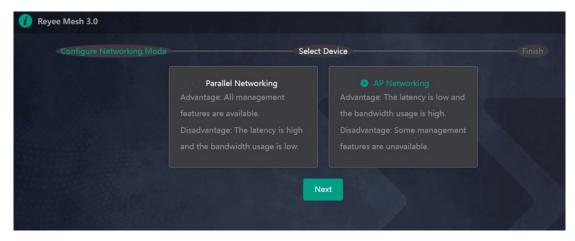


(3) Check routers for AP networking, and click Next.

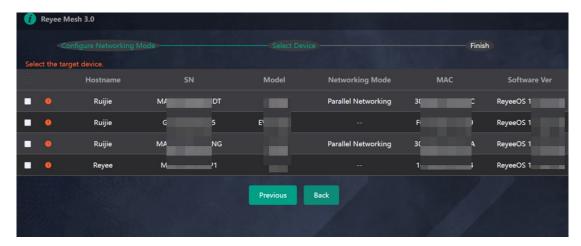

(4) Click Finish. You will be redirected to a new page.

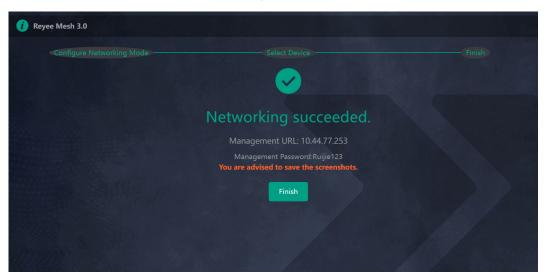

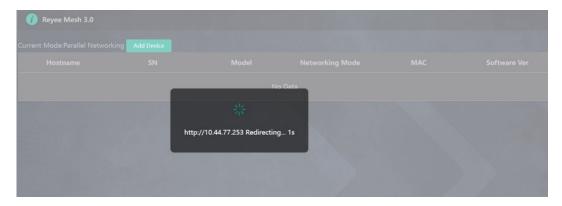

(5) On the master router page that is displayed, enter the password to log in.

## 6.21 Configuring UpnP



Caution

This feature is supported in router mode.

#### 6.21.1 Overview


The universal plug and play (UPnP) function can map the port used by a client for Internet access according to the client's request so that related applications run faster or more stably. Common applications that support UPnP include MSN Messenger.

#### 6.21.2 Configuration Steps

Smartphone View: Choose More > Switch to PC view > More > Advanced > UPnP Settings.

PC View: Choose **More** > **Advanced** > **UPnP Settings**.

Click **Enable**. You are advised to disable the function. Any applications that use UPnP to map ports will be listed below.

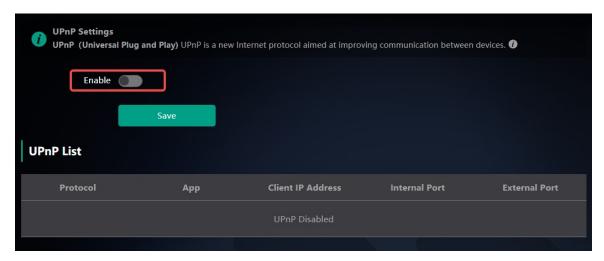


## 6.22 Enabling Wi-Fi Switch

Smartphone View: Choose More > Switch to PC view > More > Advanced > Wi-Fi Switch.

PC View: Choose More > Advanced > Wi-Fi Switch.

The Wi-Fi function is disabled on the device after the Wi-Fi switch is turned off.

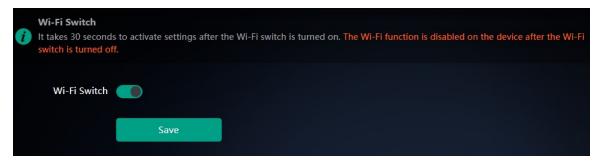


## 6.23 Switching to AP Mode

Smartphone View: Choose More > Switch to PC view > More > Advanced > Switch to AP Mode

PC View: Choose More > Advanced > Switch to AP Mode

Click Switch To AP Mode, switch the router found on the local network to AP mode with a single click.

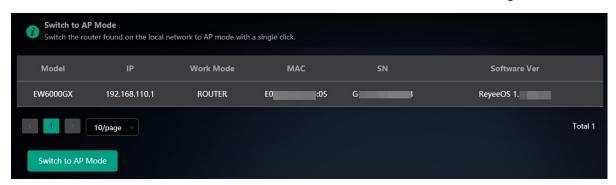

## 6.24 Link Aggregation



#### Note

This feature is mutually exclusive with the Game Port Guarantee feature.

Smartphone View: Choose More > Switch to PC view > More > Advanced > Link Aggregation.

PC View: Choose More > Advanced > Link Aggregation.

Connect LAN3 and LAN4 ports to the downlink device (e.g., Network Attached Storage (NAS)) with an Ethernet cable, enable the 802.3ad link aggregation mode on the downlink device, and click **Save**.



## 6.25 Configuring Game Port Guarantee

Smartphone View: Choose More > Switch to PC view > More > Advanced > Game Port Guarantee.

PC View: Choose More > Advanced > Game Port Guarantee.

#### 6.25.1 Overview

In a home network, it is often the case that one client occupies a large amount of bandwidth when downloading resources, causing slow Internet connection for other clients. In order to protect the Internet experience (especially gaming experience) of other clients in this situation, you can connect a specific client to the GAME port (LAN4) of the router using an Ethernet cable and enable **Game Port Guarantee** on the router. This can ensure a smooth gaming experience even when other clients are consuming large amounts of bandwidth.

If the basic average latency of the Internet is lower than 25 ms, even if other clients or gaming clients connected to the GAME port are performing heavy traffic downloads, the gaming latency of the gaming client connected to the GAME port can be guaranteed to be 40 ms or lower.


#### 6.25.2 Configuring Steps

First, connect the client to the GAME port of the router using an Ethernet cable. Then, access the router's web interface and enable **Game Port Guarantee** by choosing **More > Advanced > Game Port Guarantee**. Next, click **Save**.



Note

Game Port Guarantee is automatically disabled if Link Aggregation or IPTV is configured on the GAME port.

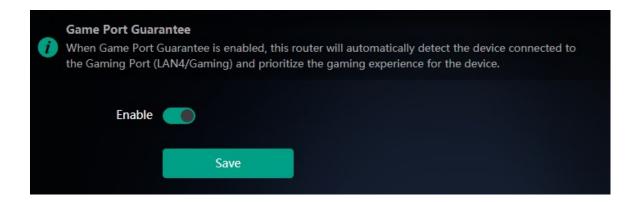


## 6.26 Configuring Auto NAT66

Smartphone View: Choose More > Switch to PC view > More > Advanced > Auto NAT66.

PC View: Choose More > Advanced > Auto NAT66.

In a home network, there is often a need to connect multiple devices to the Internet, but IPv6 addresses can be limited. By using auto NAT66, a single IPv6 address can be shared by multiple devices on a home network for Internet access.

Toggle on **Enable** to enable **Auto NAT66**. Once this feature is enabled, automatic address translation for the IPv6 network can be achieved.

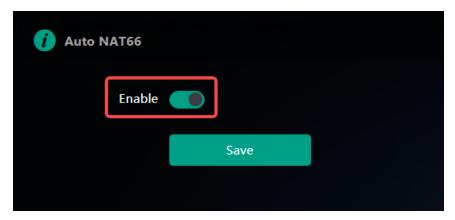

## 6.27 Configuring PPTP VPN

#### 6.27.1 Overview

The device can support Point-to-point Tunneling Protocol (PPTP) server or client, enabling enterprises to connect to branch offices on the public network through private tunnels. A VPN connection can be established with other network devices that support PPTP.

#### 6.27.2 Configuring PPTP Server

Smartphone View: Choose More > Switch to PC view > More > VPN > PPTP > PPTP.

PC View: Choose More > VPN > PPTP > PPTP.

#### 1. Configuring PPTP Server

(1) Click **Enable** to enable the function of PPTP and select **Server**.


**Local Tunnel IP**: Enter the local address. It is used as the local virtual IP address of the VPN tunnel for the client to access the server after dialing in.

**VPN Subnet/Netmask**: Enter the range of IP addresses. The IP addresses in this range will be assigned to clients.

DNS Server: Enter the address of the DNS server pushed to the client.

**MPPE**: Use MPPE to encrypt PPTP tunnels. By default, encryption is not enabled on the server. Once MPPE is enabled, the Internet speed will slow down. You are advised to disable MPPE if you don't have specific security requirements.

PPP Hello Interval: Enter the interval for sending hello packets. You are advised to set the value to 10.

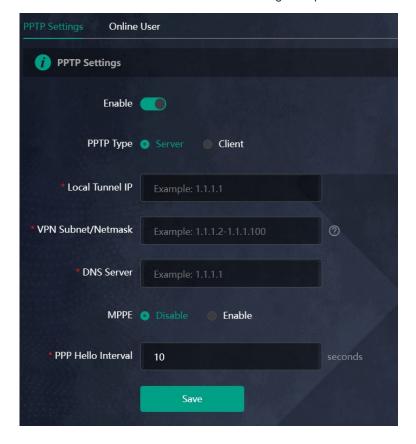


(2) Click Save and the device will receive and process the VPN request.


#### 2. Add the PPTP user

Click +Add to enter a username and a password for authentication when the client dials in.

Select the network mode. **PC to Router** indicates the dial-in mode from PC to router. **Router to Router** indicates the dial-in mode from router to router.

Enable Status and click OK.

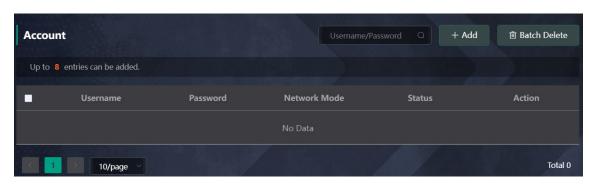

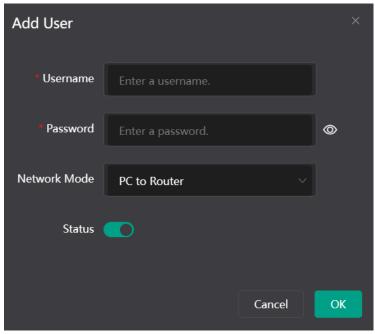

#### 6.27.3 Configuring PPTP Client

Choose More > Switch to PC view> More> VPN> PPTP.

PC View: Choose More> VPN> PPTP.

Click **Enable** to enable the PPTP function. Select **Client** and enter the username and password configured on the server, which must be consistent with the server configuration.

**Tunnel IP**: It is the virtual IP address used to create the VPN tunnel. You are advised to select **Dynamic** to obtain the IP address assigned by the server. You can also set static IP addresses in the address pool that does not cause conflicts.


Server Address: Enter the WAN port IP address (the public IP is required) or the domain name of the server.

Peer Subnet: Enter the target network segment of the server, which cannot be the same as that of the client.

**Work Mode**: The **NAT** mode only allows the client to access the Internet on the server and does not allow the server to access the Internet on the client. The **Router** mode allows the server to access the Internet on the client.

PPP Hello Interval: Enter the interval for sending hello packets. You are advised to set the value to 10.

Click Save and the device will send the VPN tunnel request to the WAN port.

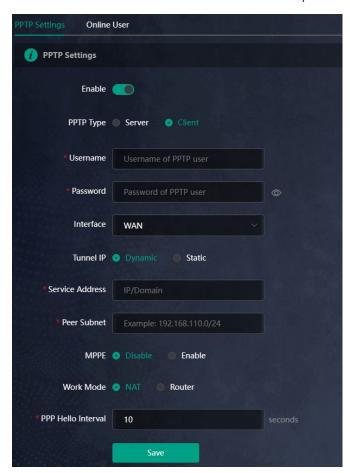

## 6.28 Configuring OpenVPN

#### 6.28.1 Overview

OpenVPN can be used to establish a secure virtual private tunnel between different sites, or between a client and a site, allowing users to access the intranet over ISP networks. It is a VPN that enables layer 2 and layer 3 tunneling through virtual network cards, supporting various devices such as PCs, smartphones, and routers to establish VPN connections.

Credentials provide security support for OpenVPN. The VPN client must use a credential generated by the server, which verifies the credential and the pre-shared key. Only after verification can a connection be established. After completing the verification, the VPN client obtains an IP address from the server, and establishes a VPN connection through that IP address.

Reyee mesh routers support server mode and client mode. In server mode, a Reyee mesh router can act as an OpenVPN server to generate credentials and verify the credential and the pre-shared key. In client mode, a Reyee mesh router works as an OpenVPN client to connect to the VPN server.

#### **6.28.2 Configuring OpenVPN (Server Mode)**


Smartphone View: Choose More > Switch to PC view> More> VPN> OpenVPN.

PC View: Choose More> VPN> OpenVPN.

#### 1. Configuring OpenVPN


- (1) Click Enable to enable the OpenVPN feature.
- (2) Select Server for the OpenVPN Type.
- (3) Select the protocol, and enter the server address, port number and other information.

Figure 6-1 Configuring OpenVPN Server

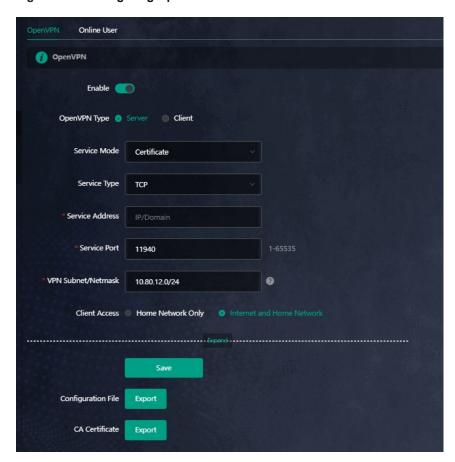

(4) (Optional) Advanced settings.

Click **Expand** to perform the following advanced settings. If there are no special requirements, use the default settings, as shown in the following figure.

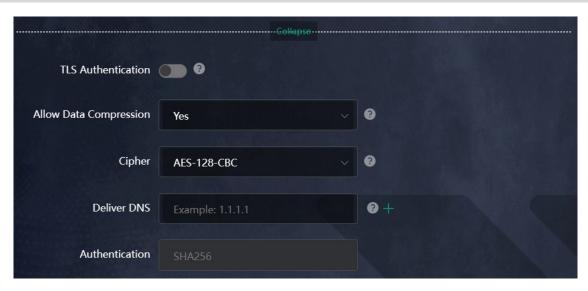

- (5) Click Save and the device will receive and process the VPN request.
- (6) Once the basic configurations are completed, you can view the server tunnel information in the **Tunnel List**.

Table 6-4 Configuration Items of OpenVPN Server Mode


Item	Description
Server Mode	<ul> <li>The device supports Account, Certificate and Account &amp; Certificate authentication modes:</li> <li>Account mode: The correct account name, password, and CA certificate are required to connect to the server. The configuration is simple.</li> <li>Certificate mode: The client needs the correct CA certificate, client certificate, and pre-shared key to connect to the server.</li> <li>Account &amp; Certificate mode: The client needs the correct account name, password, CA certificate, client certificate, and pre-shared key to connect to the server. This mode is suitable for scenarios with high security requirements.</li> </ul>
Service Type	All communication on OpenVPN is based on a single IP port, using <b>UDP</b> or <b>TCP</b> protocols.  The default value is UDP. You can select TCP for higher performance. TCP protocol can be used to improve the stability of VPN channels in high latency or unstable network conditions.
Service Address	The server address used for client docking, which can be a domain name.
Service Port	The port used by the OpenVPN service process. The official port assigned to OpenVPN is 1194. If the port is occupied or disabled on the local network, the server log will prompt a log indicating port binding failure. In this case, the port number needs to be changed.
VPN Subnet/Netmask	The IP address pool delivered to VPN clients, in the form of a network segment.  The first address in that segment is reserved by the server. For example, if  10.80.12.0/24 is set, then the VPN server address is 10.80.12.1.
Client Access	You can choose Home Network Only or Internet and Home Network  Home Network Only: The client can only access the LAN segment on the


Item	Description
	<ul> <li>Internet and Home Network: The client can access the LAN and WAN segments on the server. In this mode, all traffic from the client will be forwarded to the server.</li> </ul>
TLS Authentication	TLS Authentication can enhance the security of OpenVPN. Once enabled, the client must import the TLS key. (The version of the peer OpenVPN client must be later than 2.40.)
Allow Data Compression	Once enabled, the device will compress the transmitted data to save bandwidth, but it will occupy a certain amount of CPU resources. This configuration must be consistent on the client and the server to avoid any potential connection failures.
Cipher	Encrypts the data to prevent it from being intercepted midway. The default encryption standard is AES-128-CBC. If the server is configured in auto mode, the client can be configured with any data encryption algorithm, which will be automatically matched by the server. If a specific encryption method is configured on the server, the client must be configured with the same encryption method. Otherwise, the connection between the server and the client cannot be established.
Deliver DNS	The information pushed by the server to the client's DNS. Currently only Windows clients are supported.
Authentication	The digest algorithm informed by the server to the client. The default value is SHA256.

#### 2. Adding OpenVPN clients

Click + Add to enter a username and a password for authentication when the client dials in.

Enable Status and click OK.

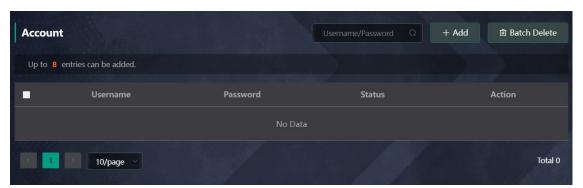



#### 6.28.3 Configuring OpenVPN (Client Mode)

Smartphone View: Choose More > Switch to PC view> More> VPN > OpenVPN.

PC View: Choose More> VPN> OpenVPN.

Currently, this device supports Import Config, through which the configuration file is manually imported for docking with the server that is similar to this device. The client configuration file client.ovpn can be directly exported from the docked OpenVPN server.

- (1) Click Enable to enable the OpenVPN function. Configure OpenVPN Type as Client.
- (2) Configure the Server Mode, and click **Browse** to import the client configuration file. Click **Save** to save the configuration.

The device supports three authentication modes: Account, Certificate, and Account & Certificate.

- Account mode: The correct account, password, and CA certificate is required to connect to the server,
   where the CA certificate information is embedded in the client's configuration file.
- o **Certificate mode**: The client needs the correct CA certificate, client certificate, and pre-shared key to connect to the server, which are all embedded in the client's configuration file.
- Account & Certificate mode: The client needs the correct account, password, CA certificate, client certificate, and pre-shared key to connect to the server, where the CA certificate information, client certificate, and pre-shared key are embedded in the client's configuration file.

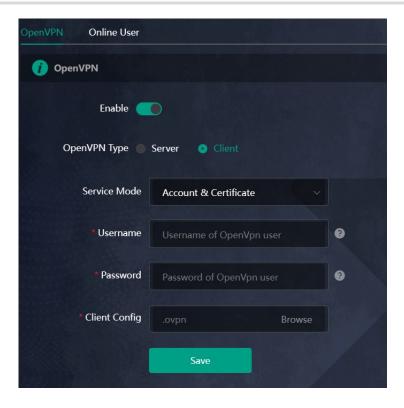


Table 6-5 Configuration Items of OpenVPN Client Web Setting Configuration Mode

Parameter	Description	
	The device supports Account, Certificate and Account & Certificate authentication modes:  • Account mode: The correct account, password, and CA certificate	
Server Mode	<ul> <li>is required to connect to the server. The configuration is simple.</li> <li>Certificate mode: The client needs the correct CA certificate, client certificate, and pre-shared key to connect to the server.</li> </ul>	
	Account & Certificate mode: The client needs the correct account, password, CA certificate, client certificate, and pre-shared key to connect to the server. This mode is suitable for scenarios with high security requirements.	
Username and password  Enter the username and password configured on the server.  This parameter can be left blank if the Server Mode is Certification.		
Client Config	Click Browse and select the client configuration file with the suffix .ovpn.	

## 6.28.4 Typical Configuration Example

#### 1. Requirements

Through OpenVPN, a client can establish a secure connection to a server over the Internet, and access resources on the server's internal network or access the Internet through the server's network proxy.

#### 2. Topology



Device B as Client

Device A as Server

#### 3. Notes

- Configure Device A as the OpenVPN server.
- Install the OpenVPN client on Device B. (https://openvpn.net/)

#### 4. Configuring OpenVPN Server (Device A)

(1) Log in to the web interface of the router, and choose **VPN** > **OpenVPN**. Then, flip on the toggle switch next to **Enable** to enable the OpenVPN function. On the page that is displayed, enter the IP address of the WAN port as the service address, as well as other required parameters.


Use the default settings unless there are specific requirements.



Note

The WAN IP address must be a public IP address or a DDNS domain name that is accessible from outside the local network.


If the router does not have a public IP address, contact the ISP to obtain a public IP address.

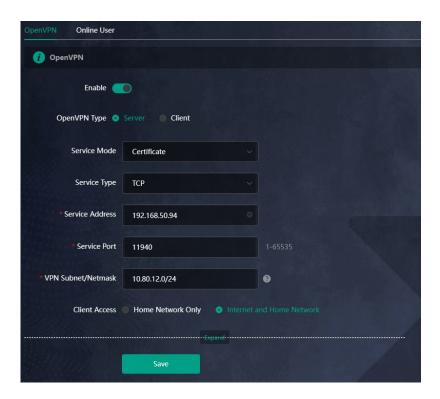

- (2) Click Save. The OpenVPN settings are saved.
- (3) The following table describes the OpenVPN server configuration.

Parameter	Description
Service Mode	<ul> <li>Account: Authentication based on password.</li> <li>Certificate: Authentication based on client certificate.</li> <li>Account &amp; Certificate: Authentication based on password and client certificate.</li> </ul>
Service Type	Use the default value unless there are specific requirements. Both UDP and TCP are supported.  If the network connection between the two ends of an encrypted tunnel is poor, for example due to high latency or heavy packet loss, then select TCP.
Service Address	The IP address of the WAN port is automatically populated.
Service Port	Indicates the port for OpenVPN service. Use the default value unless there are specific requirements.
VPN Subnet/Netmask	Indicates the network segment of the OpenVPN address pool. The first available IP address in the address pool is reserved for the server, while other addresses can be allocated to clients. For example, if this parameter is set to <b>10.80.12.0/24</b> , then the virtual IP address of the VPN server is 10.80.12.1.
Client Access	Home Network Only: If this access mode is selected, then the client can only access resources on the server's internal network, but is unable to access the Internet through the server's network proxy.      Internet and Home Network: If this access mode is selected, then the client not only can access resources on the server's internal network, but also can access the Internet through the server's network proxy.

(4) Click **Expand** to show advanced settings. Use the default values unless there are specific requirements.

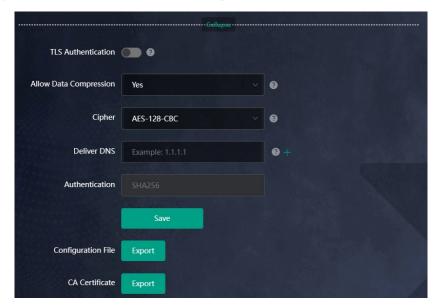


(5) Click **Export** next to **Configuration File** to export the .ovpn file which can be imported on the client side. Unless there are specific requirements, you do not need to export the CA certificate.

#### 5. Configuring OpenVPN Client (Use Windows Client as an Example)


(1) Download the OpenVPN client (https://openvpn.net).




(2) Open the Windows OpenVPN client and choose the File tab.

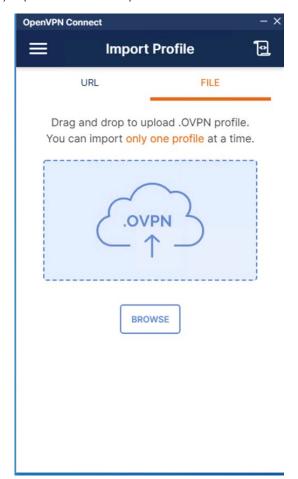


(3) Click **BROWSE** and select the .ovpn file exported from the server side.

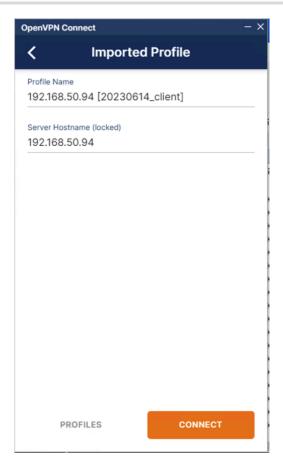


(4) Click CONNECT to connect to the OpenVPN server.

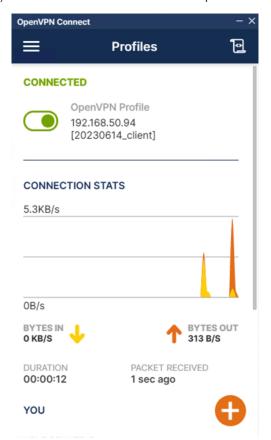

(5) Check the obtained virtual IP addresses.

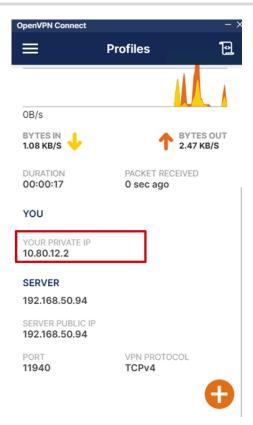

(6) Log in to the web interface of the router, and choose More > VPN > OpenVPN > Online User to find the connected client.

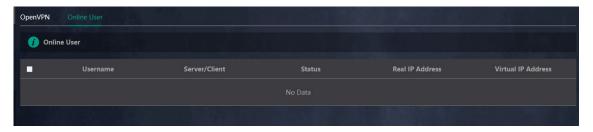

## **Other Settings**



#### Caution

This feature is supported in router mode.


Smartphone View: Choose More > Switch to PC view > More > Advanced > Other Settings.

PC View: Choose More > Advanced > Other Settings.

The functions are disabled by default. You are advised to keep them disabled if there are no special requirements.

Enable Advanced Firewall: Advanced firewall is enabled to prevent attacks and check the IP protocol.

Disable ICMPv6 Error Messages: You can choose to disable four types of error messages so that ICMPv6 error messages cannot be sent, which saves system resources and prevents ICMPv6 attacks.



## **7** Configuring Diagnostics



#### Caution


If the issue persists despite following the troubleshooting methods provided in this section, you may require remote support from a technician who will enable developer mode to resolve the issue. We will ensure your data is protected during this process.

## **Enabling Alerts**

Smartphone View: Choose More > Switch to PC > More > Diagnostics > Alerts.

PC View: Choose More > Diagnostics > Alerts

The device may be affected by conflicts and attacks in the network, which leads to network anomalies. Enable the Alerts function, and you can view the alerts for fault prevention and troubleshooting. You can also customize the followed alerts .All alerts are followed by default. The unfollowed alerts will not be detected or displayed. You are advised to follow all alerts.

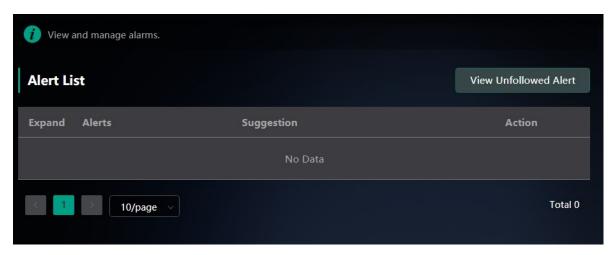

Click the arrow under **Expand** to view alarm details.

Click Delete to delete the corresponding alarm messages. You are advised to retain all alerts for review.

Click Unfollow and then click OK. The device will no longer report the corresponding alerts. After clicking View Unfollow Alarm, select the alarm you want to follow again. Click OK, and the device will keep following the corresponding alerts.

Table 7-1 **Alerts and Suggested Action** 

Alerts	Suggested Action
The WAN port has no link.	Please check whether a cable is plugged into the WAN port.


Alerts	Suggested Action
The port is operating at 10Mbps.	Please check the peer port settings, unplug and replug the cable, or replace the cable.
There is more than one DHCP server in the LAN network.	Please disable the extra DHCP server in the LAN network.
There is more than one DHCP server in the WAN network.	Please disable the extra DHCP server in the WAN network.
Address pool of DHCP server is full.	Enlarge the DHCP address pool.
WAN & LAN Address Conflict.	Please check the IP addresses of WAN and LAN ports. If the network addresses conflict (including IP address conflict), change the IP of LAN port.
The WAN IP address is already in use.	Please check the WAN IP address. If it is a static IP address, please change the IP address.
The LAN IP address is already in use.	Please check the LAN IP address. If it is a static IP address, please change the IP address.
The IP address of the downlink address is already in use.	Please check the IP address of the downlink device.  If it is a static IP address, please change the IP address.
A MAC address conflict or loop error occurs.	Please troubleshoot the MAC address conflict or loop error.
No DNS server address is configured.	Please add a DNS server address, e.g., 114.114.115.115.
DNS failure	Please check the network configuration.
DNS resolution error.	Please check the network configuration.
Cloud service is not running.	Please reboot the device.
Cloud service is not enabled.	Please contact Reyee technical support.
The device is not connected to the Cloud server.	Please reboot the device.
Loops occur.	Please check the network environment.

## 7.2 Diagnosing Network Problems

Smartphone View: Choose More > System > Network Check.

PC View: Choose More > Diagnostics > Network Check.

Click **Start**. The device will check the network for problems, including interfaces, routing, flow control, and provide solutions and suggestions for risk items.



## 7.3 Network Diagnosis Tools

#### 7.3.1 Network Test Tool


Smartphone View: Choose More > System > Network Tools.

PC View: Choose More > Diagnostics > Network Tools.

When you select the ping tool, you can enter the IP address or URL and click **Start** to test the connectivity between the router and the IP address or URL. The message "Ping failed" indicates that the router cannot reach the IP address or URL.

The Traceroute tool displays the network path to a specific IP address or URL.

The DNS Lookup tool displays the DNS server address used to resolve a URL.

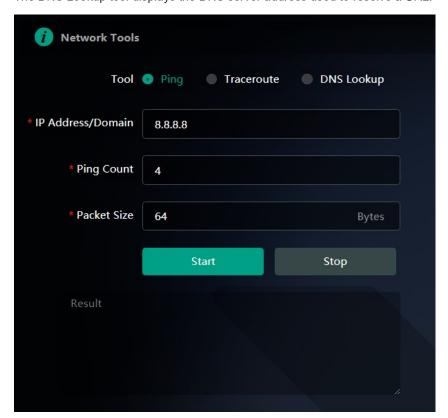

#### 7.3.2 Packet Capture Tool

Smartphone View: Choose More > Switch to PC view > More > Diagnostics > Packet Obtaining.

Configuration Guide **Configuring Diagnostics** 


#### PC View: Choose More > Diagnostics > Packet Obtaining

Set the interface, protocol, and IP address whose packets need to be captured, file size limit, and packet count limit to limit the volume of packets captured. Click Start. Packet Obtaining can be stopped at any time and a link to the generated file is generated. You can use Wireshark and other analysis software to open and view the file.



#### **A** Caution

Packet capture may occupy many system resources and cause network stalling. Exercise caution when performing this operation.

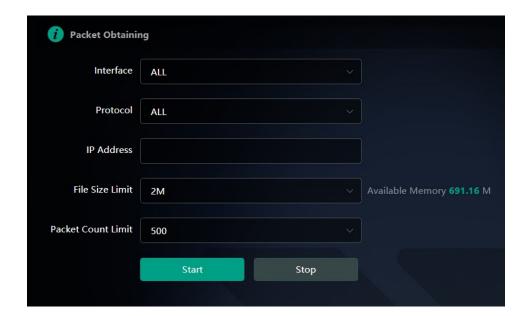


## 8 System Settings

## 8.1 Switching to PC View

Choose More > Switch to PC view.

The PC view is the screen displayed after you log in from a PC. The page layout is different from that on the smartphone.

You can click in the upper left corner to return to the mobile view (you can also drag the page to the narrowest position on the PC to enter the mobile view).

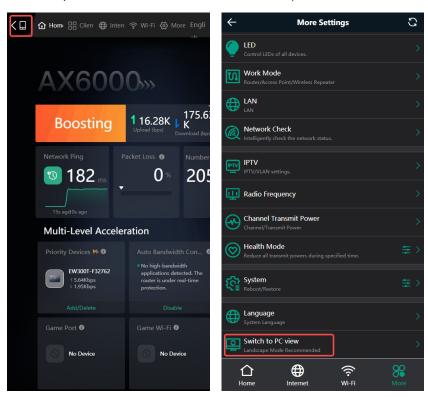


## 8.2 Configuring the Login Password

Smartphone View: Choose More > System > Password.

PC View: Choose More > System > Login > Login Password.

Enter the old password and new password. After saving the configuration, log in again with the new password.

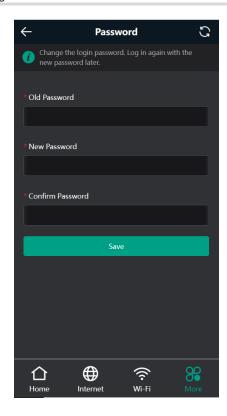


## 8.3 Configuring Session Timeout Duration

Smartphone View: Choose More > Switch to PC view > More > System > Login > Session Timeout.

PC View: Choose More > System > Login > Session Timeout.

If no operation is performed on the page within a period of time, the session will be down. When you need to perform operations again, enter the password to open the configuration page. The default timeout duration is 3600 seconds, that is, 1 hour.

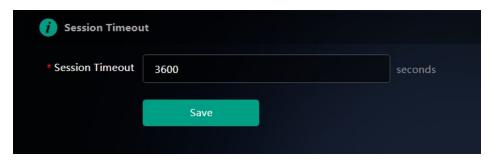

Remote

#### **Access**

Smartphone View: Choose More > Switching to PC View > More > System > Login > Remote Access.

PC View: Choose More > System > Login > Remote Access.


Click Enable to enable the remote access.



Caution

This this may cause attack. Therefore, exercise caution when performing this operation.

This function cannot be enabled if the device management password has a weak security strength, such as being purely numerical or alphabetical. See <u>8.2 Configuring the Login Password</u> to configure a strong and secure device management password.

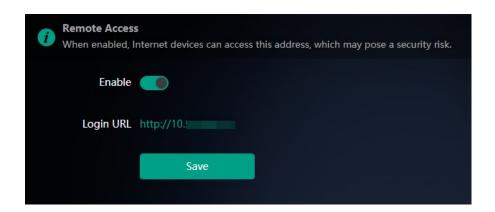

### 8.5 Configuring Backup and Import

Smartphone View: Choose More > Switch to PC view > More > System > Management. > Backup & Import

PC View: Choose More > System > Management. > Backup & Import

Configure backup: Click Backup to download a configuration file locally.

Configure import: Click **Browse**, select a configuration file backup on the local PC, and click **Import** to import the configuration file. The device will restart.



## 8.6 Restoring Factory Settings

Smartphone View: Choose More > System > Reset.

PC View: Choose More > System > Management > Reset.

Click to enable **Keep Config** to retain the network configuration, Wi-Fi settings, time zone and other configurations after the router is restored to factory settings.

Click Reset to restore factory settings.




#### Caution

This operation will clear existing settings and restart the device. Therefore, exercise caution when performing this operation.



#### Note

If resetting all routers in the network is unsuccessful, it is possible that the SSID of the primary router is restored to factory defaults (the default SSID can be found on the bottom label of the router), while the SSID of the secondary router is not restored to factory defaults. You can hold down the Reset button of the secondary router for more than 10 seconds to restore it to factory defaults.

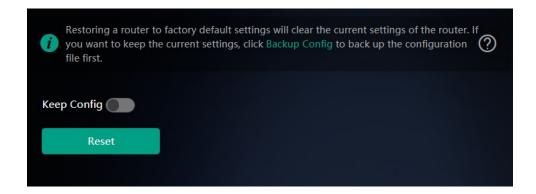


## 8.7 Configuring System Time

Smartphone View: Choose More > System > Time.

PC View: Choose More > System > System Time.

You can view the current system time. If the time is incorrect, check and select the local time zone. If the time zone is correct but time is still incorrect, click **Edit** to manually set the time. In addition, the router supports Network Time Protocol (NTP) servers. By default, multiple servers serve as the backup of each other. You can add or delete local servers as required.

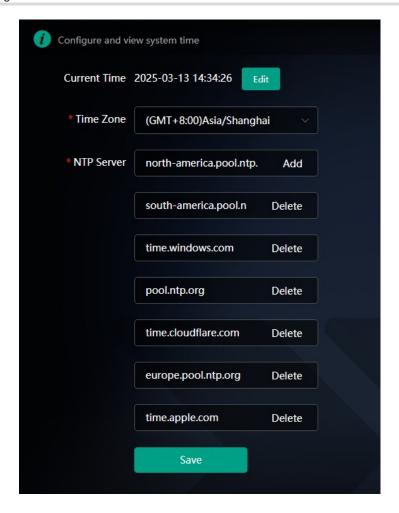

## 8.8 Configuring Reboot

Smartphone View: Choose More > System > Reboot > Reboot.

PC View: Choose More > System > Reboot > Reboot.

Click **Reboot**, and the device will be restarted. Please do not refresh or close the page during the reboot process. After the device is rebooted, the browser will be redirected to the login page.



## 8.9 Configuring Scheduled Reboot

#### 8.9.1 Getting Started


Confirm that the system time is accurate to avoid network interruption caused by device reboot at the wrong time. For details, see <u>8.7 Configuring System Time</u>.

#### 8.9.2 Configuration Steps

Smartphone View: Choose More > System > Scheduled Reboot.

PC View: Choose More > System > Reboot > Scheduled Reboot.

Click Enable, and select the date and time of weekly scheduled reboot. Click Save. When the system time matches the scheduled reboot time, the device will restart.

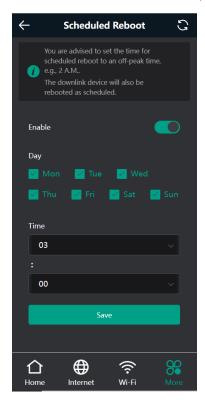

## 8.10 Performing Online Upgrade and Displaying the System Version

Smartphone View: Choose More > System > Online Upgrade.

PC View: Choose More > System > Upgrade > Online Upgrade.


You can check the current system version. If there is a new version available, you can click it for an upgrade.



Caution

After being upgraded, the device will restart. Therefore, exercise caution when performing this operation. You are advised to set the scheduled upgrade time to an early morning time to avoid affecting Internet access.


If no new version is detected and online upgrade cannot be performed, check whether the DNS is correctly obtained or go to More > Advanced > Local DNS to set the DNS server for the router.

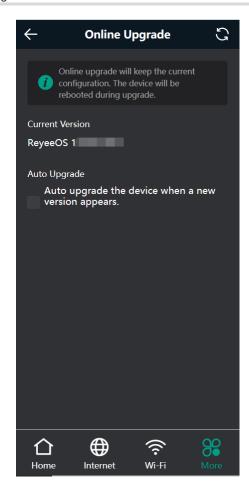

## 8.11 Turning On/Off the Indicator

Smartphone View: Choose More > LED

PC View: Choose More > System > LED.

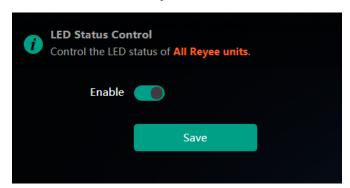


## 8.12 Switching System Language

Smartphone View: Choose More > Language.

PC View: Click in the upper right corner of the page.

Click a required language to switch the system language.

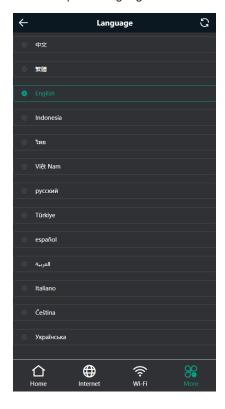

Configuration Guide FAQs

## 9 FAQs

## 9.1 How Do I Restore the Router to Factory Settings?

Use a needle-shaped object to press and hold the router's **Reset** button for more than 10 seconds, then release it after the system LED flashes quickly. Wait for the router's system LED to become solid on, then perform network settings on the router. The SSID of the router in the factory state can be found on the label on the back of the router.

## 9.2 What Should I Do If I Forgot the Password?

- Forgot the management password of the web interface: Enter the Wi-Fi password and try again. If the
  password is still incorrect, restore the router to factory settings. The management password will also be
  restored to the default management password.
- Forgot the Wi-Fi password:
  - o Enter the default Wi-Fi password on the label on the back of the router and try again.
  - Scan the QR code on the label on the back of the router, and change the Wi-Fi password on the Reyee Router App.
  - o If the fault persists, restore the router to factory settings. The management password will also be restored to the default Wi-Fi password.

# 9.3 How Do I Manage the Router When Used As a Range Extender After Installation is Successful?

You are advised to connect your PC or smartphone to the device's Wi-Fi network. Then, open a browser and enter **192.168.110.1** in the address bar to access the router's web interface.

If you are unable to access the router's web interface using the default IP address, you can use the alternative methods specified in 3.4 Manage the Device after Successful.

# 9.4 What Should I Do If the System LED Keeps Flashing After the Router is Powered On?

Restore the router to factory settings and power on it again.

If the system LED still fails to turn solid on, you can contact us through the following channels:

- After-sales website: <a href="https://reyee.ruijie.com/en-global/support">https://reyee.ruijie.com/en-global/support</a>
- Manual service: <a href="https://reyee.ruijie.com/en-global/rita">https://reyee.ruijie.com/en-global/rita</a>
- Community: <a href="https://community.ruijienetworks.com">https://community.ruijienetworks.com</a>
- Service hotline: <a href="https://www.ruijienetworks.com/support/hotline">https://www.ruijienetworks.com/support/hotline</a>