

UniFi UISP Branding

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech In


Flagship > U7 Pro Max

Datasheet

In The Box

Marketing Images

Installation Guide

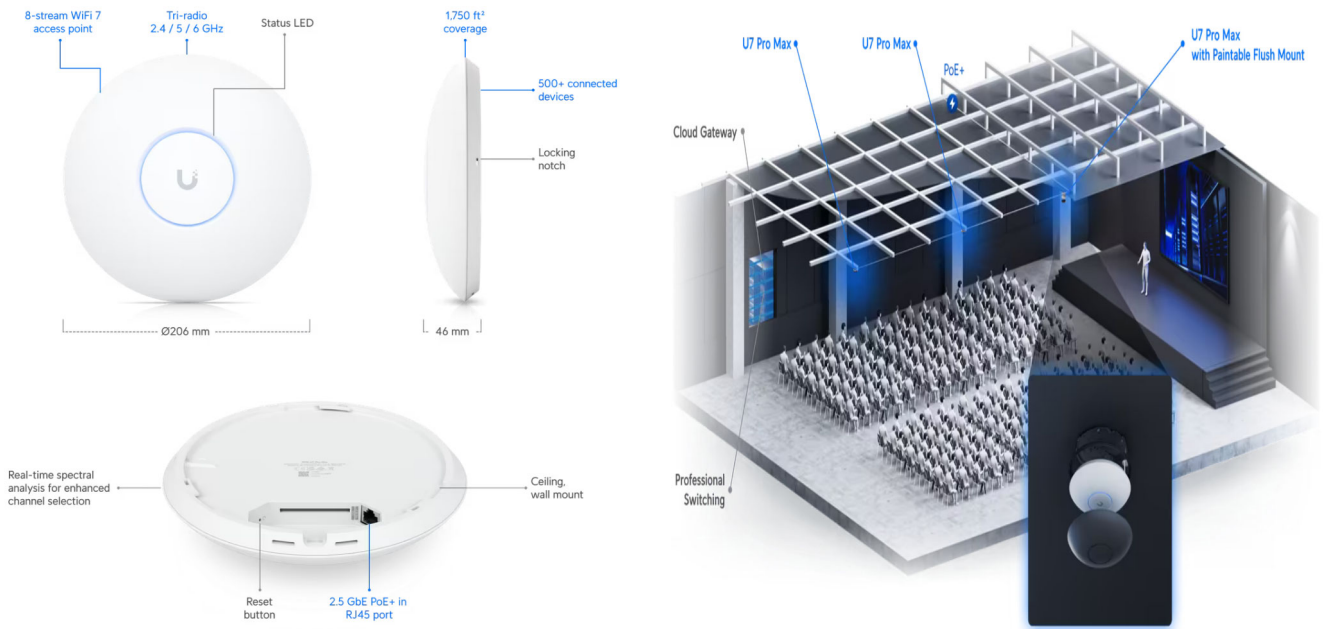

## Mechanical

<b>Dimensions</b>	Ø206 x 46 mm (Ø8.1 x 1.8")
<b>Weight</b>	680 g (1.5 lb)
<b>Enclosure material</b>	Polycarbonate, aluminum
<b>Mount material</b>	Stainless steel (SUS304), galvanized steel (SGCC)

## Hardware

<b>Networking interface</b>	(1) 1/2.5 GbE RJ45 port
-----------------------------	-------------------------

<b>Management interface</b>	Ethernet
<b>Power method</b>	PoE+
<b>Power supply</b>	UniFi PoE switch
<b>Supported voltage range</b>	44—57V DC
<b>Max. power consumption</b>	25W
<b>Max. TX power</b>	
2.4 GHz	23 dBm
5 GHz	29 dBm
6 GHz	23 dBm
<b>MIMO</b>	
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
5 GHz	4 x 4 (DL/UL MU-MIMO)
6 GHz	2 x 2 (DL/UL MU-MIMO)
<b>Max. data rate</b>	
2.4 GHz	688 Mbps (BW40)
5 GHz	8.6 Gbps (BW240)
6 GHz	5.7 Gbps (BW320)
<b>Antenna gain</b>	
2.4 GHz	4 dBi
5 GHz	6 dBi
6 GHz	5.9 dBi
<b>LEDs</b>	White/blue
<b>Button</b>	Factory reset
<b>Mounting</b>	Wall, ceiling (Included)
<b>Ambient operating temperature</b>	-30 to 50° C (-22 to 122° F)
<b>Ambient operating humidity</b>	5 to 95% noncondensing
<b>Certifications</b>	CE, FCC, IC

---

## Software

<b>WiFi standards</b>	802.11a/b/g/n/ac/ax/be (WiFi 6/6E, WiFi 7)
<b>Wireless security</b>	WPA-PSK, WPA-Enterprise (WPA/WPA2/WPA3/PPSK)
<b>BSSID</b>	8 per radio
<b>VLAN</b>	802.1Q

<b>Advanced QoS</b>	Per-user rate limiting
<b>Guest traffic isolation</b>	Supported
<b>Concurrent clients</b>	500+

---

## Supported Data Rates

<b>802.11a</b>	6, 9, 12, 18, 24, 36, 48, 54 Mbps
<b>802.11b</b>	1, 2, 5.5, 11 Mbps
<b>802.11g</b>	6, 9, 12, 18, 24, 36, 48, 54 Mbps
<b>802.11n</b>	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
<b>802.11ac</b>	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
<b>802.11ax (WiFi 6/6E)</b>	7.3 Mbps to 4.8 Gbps (MCS0 - MCS11 NSS1/2/3/4, HE 20/40/80/160)
<b>802.11be (WiFi 7)</b>	
<b>5 GHz</b>	7.3 Mbps to 8.6 Gbps (MCS0 - MCS13 NSS1/2/3/4, EHT 20/40/80/160/240)
<b>6 GHz</b>	7.3 Mbps to 5.7 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240/320)

---

## Application Requirements

<b>UniFi Network</b>	Version 8.2.93 and later
----------------------	--------------------------

### Stay in Touch

<input type="text" value="Email"/>	<input type="button" value="Subscribe"/>
------------------------------------	--



© 2024 Ubiquiti, Inc. All rights reserved.